



Demo #17735

Clean Cab Air

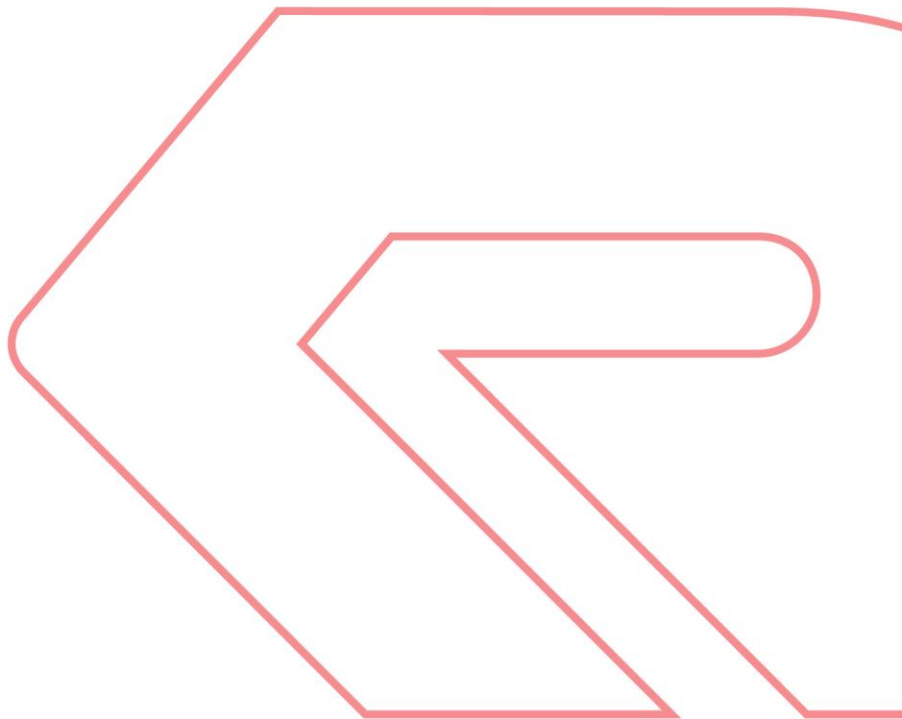




Table of Contents

Demo #17735	1
Clean Cab Air	1
MEASUREMENTS	2
CHASSIS SPECIFICATION	3
SIREN / SPEAKER / WARNING LT PACKAGE	66
12-VOLT ELECTRICAL SYSTEM	70
CHASSIS MODIFICATION	77
ROSENBAUER N55 SINGLE STAGE PUMP	79
STAINLESS STEEL PUMP PLUMBING	83
DISCHARGES	88
PUMP PANEL --SIDE MOUNT	96
WATER TANKS	101
HOSEBED	104
MODULAR BODY	105
PAINT - LETTERING and STRIPING	121
LOOSE EQUIPMENT	123
WARRANTIES	124
MISCELLANEOUS	133



MEASUREMENTS

OVERALL HEIGHT

An overall height restriction has not been specified for this apparatus.

OVERALL LENGTH

An overall length restriction has not been specified for this apparatus.

OVERALL WIDTH

An overall width restriction has not been specified for this apparatus.

WHEELBASE

A wheelbase restriction has not been specified for this apparatus.

ANGLE OF APPROACH

The angle of approach for the apparatus shall not be less than eight (8) degrees as specified by the current edition of NFPA 1901.

ANGLE OF DEPARTURE

The angle of departure for the apparatus shall not be less than eight (8) degrees as specified by the current edition of NFPA 1901.

NFPA Equipment Allowances



CHASSIS SPECIFICATION

CAB CUSTOM STYLE

The cab shall be a custom, cab over engine style, with the driver and officer positions ahead of the engine and front axle. The cab shall be specifically designed and manufactured for the fire service industry.

The cab shall be designed and assembled by the apparatus manufacturer in a facility located on the manufacturer's premises. No Exceptions.

The cab shall be of a totally enclosed full tilt design, with the interior area completely open to improve visibility and verbal communication between the occupants. The cab shall be capable of tilting 45-degrees, allowing the chassis engine to be removed, if required, without tilting the cab beyond 45-degrees. No Exceptions.

The cab shall include a four (4)-point rubber isolated cab pivot and mounting system. The rear histic mounts shall be isolated from the chassis frame to reduce the transfer of road vibrations and frame torque into the cab, while providing superior handling characteristics. No solid mounted rear lock downs shall be acceptable. No Exceptions.

The front cab pivot assemblies shall be 1/2" A36 steel plate with a .31" thick 2-1/2" diameter tube cross member mechanically attached to the cab and frame. There shall be two (2) greaseable rubber isolated engineered bushings to reduce the transfer of road vibrations into the cab.

The cab shall be locked down by a two (2)-point automatic spring-loaded hook mechanism that actuates after the cab has been lowered.

The cab super-structure shall be designed with high strength 6061-T6 aluminum extrusions. This shall include the "A", "B", "C" and "D" extruded pillars, triple wall front end reinforced by 3/16" thick x 2"x3" extrusion tubes, 3/16" side walls and 3/16" diamond plate rear wall. This shall offer superior occupant protection in the event of vehicle impact.

The "A" pillar shall be of a closed section, one-piece extrusion extending from the cab header to the bottom of the cab. This design shall ensure strength and superior resistance to buckling in the event of a frontal impact.

Additional cab strength shall be obtained through closed section, dual extrusions in the construction of the "D" pillars.

The rear wall of the cab shall offer a seamless wrap around style on each of the rear corners thereby alleviating water entering the cab as well as additional rigidity.



The outside cab width shall measure 96" across. The interior cab shall have a width of 90".

The cab length shall measure 77.3" from the center of the front axle to the front cab skin and 54" from center of the front axle to the back of the cab, for a total cab length of 131.3".

The cab shall also feature ample driver and officer foot room, a minimum of 3 square feet for the driver and 4 square feet of floor space at the officer's feet. (No exceptions)

The crew floor shall feature a complete flat floor design, including provisions for a one o'clock PTO inclusion, while still offering a minimum of 23 uninterrupted total square feet of space. The distance from the back of the tunnel to the interior wall shall be 49" measured at floor level and 54" at top of engine tunnel.

The leading edge of the cab floor from the steps shall meet NFPA 15.7.4 slip resistance requirements on both the front and rear cab doors. No Exceptions.

The cab shall meet or exceed cab impact test (SAE J-2420, cab rollover test (SAE J2422), and cab seating requirements (FMVSS 210, and FMVSS 208).

The cab shall include 4 doors. They shall have a front two (2) cab doors shall have a minimum clear opening of 42.5" wide by 81" high measured from the top of the lower cab step to the top of the door opening.; and the rear two (2) crew doors shall be a minimum clear door opening of 32.5" wide by 81" high measured from the top of the lower cab step to the top of the door opening. The length of the door will vary depending on door type.

ROOF STYLE - FLAT

The roof of the cab shall incorporate a flat roof style. The cab roof design shall incorporate an angled front roof, transitioning into a rolled extrusion for a swept back design.

The roof of the cab shall feature dual .25" thick interlocked structural member extrusions running the entire width of the cab defending against buckling in the event of a rollover.

The interior cab height based on the flat roof style shall measure a minimum of 55-1/2".

The crew roof super structure shall include a reinforcement hat-section structure 1/8" thick 5052-H32 aluminum bracing. The for-aft support braces will be 24" on center apart, the side to side support braces will stretch from cab side to cab side and centered between the dual 3/16" extruded and plate reinforced roll-cage section.

The forward cab roof section shall include a combination of 1/8" 6061-T6 extruded tube reinforcements and a hat-section structure 1/8" thick 5052-H32 aluminum bracing. The bracing shall wrap the entire perimeter of the cab forward roof, and the condenser support structure.



A drip rail shall be provided along the top radius of each cab side. The drip rails shall help prevent water from the cab roof running down the cab side.

CAB DOORS

The cab shall include a total of four (4) doors, two (2) forward and two (2) rear crew doors.

The forward cab doors shall be a minimum of 45" wide, and have a cab structure opening of 42.5" wide; and the rear crew doors shall be a minimum of 35" wide, and have a minimum cab structure opening of 32.5" wide to provide enhanced entry and egress of the cab.

All cab doors shall open a minimum of 80 degrees for the safety of personnel during entrance or egression from the cab.

Each cab door shall feature:

1. Superior strength and rigidity from 3/16" closed section extruded door frames
2. Damping inside each door for a solid feel and minimized reverberation when closed
3. A rolled rubber bulb seal style gasket shall be utilized around the door ensuring a weather tight fit
4. Integrated, mechanical door stop
5. A full length, hidden piano style 10 gauge stainless steel door hinge with a 1/4" pin, which shall be mounted inside the panel of the door prohibiting dirt and debris from becoming trapped in the hinge
6. An integrated one-piece inner door assembly that includes a glass track, mounting provisions for window regulator, door handle and door panel shall be utilized. The inner door assembly shall be easily removed with nut inserts. Self-tapping screws shall not be acceptable.



CAB STEPS

The cab steps shall meet NFPA 13-7.3 in size and slip resistance requirements.

The cab shall incorporate a two-step design at each door, with a first step height of approximately 22" from the ground. The leading edge of the first step shall be 5" further outboard than the second step to provide a staircase design for safer egress.

The front cab first step shall measure a minimum of 32" wide x 9-1/2" deep. The front cab intermediate step shall measure a minimum 33" wide x 8-1/2" deep.

The crew cab first step shall measure a minimum of 20-1/4" wide x 9-1/2" deep. The crew cab intermediate step shall measure a minimum 22-1/2" wide x 9-1/2" deep.

The top crew step shall incorporate an angle approximately midway from the rear wall to the crew door hinge extending out the flooring under the rear facing outer seat positions, offering foot placement for safety while seated in this position.

CAB STEP TRIM

The cab steps shall include a 14 gauge 304 stainless steel construction, on the first step, the step closest to the ground. The stainless steel finish shall be a number 8 mirror. The step shall include a frame which is integral with the construction of the cab for rigidity and strength. The step shall be furnished with large extruded holes to allow water and other debris to flow through rather than becoming packed under the step. And a custom diamond pattern with extrusions offers a stylish look with plenty of grip. The middle step shall be integral with the cab in construction and shall be trimmed in 3003-H22 embossed aluminum tread plate which is 0.084" thick.

CAB STEP TRIM KICKPLATE

The cab step risers at all doors, the vertical section of all steps, shall include an aluminum tread plate finish.

FULL HEIGHT DOORS

All doors shall be full height from the roof of the cab extending down to cover and protect the entrance step areas.

DOOR FILL PANEL

There shall be no door panel overlays provided.



DOOR HANDLES

The exterior door handles shall be constructed of die-cast steel and chrome plated for a pleasing appearance. They shall feature a vertically oriented heavy duty pull style handles which are extended out and suitable for easy grasping with a gloved hand.

The interior door handle shall be a paddle style which shall be chrome in color. The paddle shall be hinged towards the rear of the cab.

Each door latch shall feature a military grade aligning dove tail guide striker assembly for precision door closure which prevents sagging throughout the life of the vehicle. No exceptions.

CAB DOOR LOCKS

All cab doors shall include manual door locks with keys. The door lock shall include a toggle and shall be an integral part of the interior door handle which is red in color. The exterior door lock is integral with the door latch. The cab doors may be unlocked from the exterior with a key or through a thumb turn from inside the cab.

INTERIOR CAB DOORS

All cab doors shall feature of an aluminum interior panel.

INTERIOR CAB DOOR FINISH

All cab doors shall be finished with Line-X bed liner coating for durability. The finish shall be black in color.

INTERIOR CAB DOOR CHEVRON

Reflective striping shall be installed on the interior of each chassis door. The lower portion of the doors shall have a scotchlite red and amber chevron striping applied to it. The striping shall be a minimum of 96 square inches per door. No Exception.

INTERIOR FRONT DOOR PULL

The interior driver and officer cab doors shall each include one (1) customized cast aluminum single piece door grab pulls designed specifically for the fire service.

The single piece door pull shall have a curved designed in an "L" formation to provide multiple points for grasping with a gloved hand. The horizontal dimension shall be a minimum of 28" and the vertical dimension shall be a minimum of 20". The door pulls shall have an ergonomic curve making them easier to grasp when entering and exiting the cab. No Exceptions.



The door pull shall feature secure mounting in three separate locations of the pull utilizing stainless steel fasteners with nut inserts in each location. Self-taping screws or other mounting techniques shall not be allowed for interior door pulls or grab handles.

Each handle shall be constructed of A356 aluminum casting and shall feature a red powder coated finish.

INTERIOR GRAB HANDLE REAR DOOR

A red powder coated cast aluminum grab handle shall be provided on the inside of each rear crew door. The handle shall extend horizontally the width of the window just above the windowsill. The handle shall assist with entry and egress from the crew area of the vehicle.

The interior driver and officer rear cab crew doors shall include one (1) customized cast aluminum single piece door grab pulls designed specifically for the fire service.

The door pulls shall have an ergonomic curve making them easier to grasp when entering and exiting the cab. No Exceptions.

The door pull shall feature secure mounting with stainless steel fasteners with nut inserts in each location. Self-taping screws or other mounting techniques shall not be allowed for interior door pulls or grab handles.

Each handle shall be constructed of A356 aluminum casting and shall feature a red powder coated finish.



WINDSHIELD

A one (1)-piece, safety glass full width windshield with more than 3,075 square inches of area will be provided. No Exceptions.

The windshield shall feature:

- A completely uninterrupted view from both the driver and officer positions
- The windshield will consist of three (3) layers; the outer layer, the middle safety laminate, and the inner layer. The .114" thick outer light layer will provide superior chip resistance. The middle safety laminate layer will prevent the windshield glass pieces from detaching in the event of breakage.
- Economical replacement readily available from auto glass supplier
- Easily removable for replacement using standard automotive techniques
- A frit band will be provided along with an outer trim seal on the outside perimeter of the windshield for a finished automotive appearance.

WINDSHIELD WIPER SYSTEM

A single windshield wiper system shall be incorporated in conformance with FMVSS and SAE requirements. The outer two wiper arms shall be 24" in length. They shall include a 22" wiper blade for each arm. The inner wiper arm shall be 28" in length. The inner wiper arm shall include a 14" wiper blade.

The windshield wiper fluid reservoir can be filled with raising of the cab.

WINDSHIELD WIPER ACTIVATION

The windshield wipers shall be activated through a switch on the driver's panel, with intermittent control.

DRIVER WINDOW

The driver's door shall include a window which measures a minimum 25.5" wide x 21" high with a minimum clear viewing area of 694 square inches. The glass shall include a dark tint and through a powered operation shall completely roll into the door housing.

Both windows shall be trimmed in a black anodized aluminum ring and rubber seal to prevent water from entering the cab when closed.



POWER WINDOW SWITCHES

The Driver shall have switches for each of the cab door windows. The powered windows of the officer door, and each respective crew door, shall be activated by a switch on the respective door.

The switches for the driver and officer door windows shall be located in a customized door grab handle. No Exception

OFFICER WINDOW

The officer's door shall include a window which measures 25.5" wide x 21" high with a minimum clear viewing area of 694 square inches. The glass shall include a 50% dark tint and through a powered operation shall completely roll into the door housing.

Both windows shall be trimmed in a black anodized aluminum ring and rubber seal to prevent water from entering the cab when closed.

REAR DRIVER SIDE WINDOW

The rear driver's side door shall include a window which is 20.75" wide x 21.75" high with a minimum clear viewable area of 451 square inches. The glass shall include a 50% dark tint and through power actuation shall roll completely into the door housing. The power window shall be activated through a switch located on the top of the door panel.

REAR OFFICER SIDE WINDOW

The rear officer's side door shall include a window which is 20.75" wide x 21.75" high with a minimum clear viewable area of 451 square inches. The glass shall include a 50% dark tint and through powered actuation shall roll completely into the door housing. The power window shall be activated through a switch located on the top of the door panel.

DRIVER MIDDLE WINDOW

The cab shall include a fixed driver's side window glass which shall be located between the cab front and rear doors. The glass shall be 17.5" wide x 23.5" high and shall include a 50% dark tint and shall be trimmed in a black anodized rubber ring for a tight seal when closed.

OFFICER MIDDLE WINDOW

The cab shall include a fixed officer's side window glass which shall be located between the cab front and rear doors. The glass shall be 17.5" wide x 23.5" high and shall include a 50% dark tint and shall be trimmed in a black anodized rubber ring for a tight seal when closed.



CAB INSULATION

The cab shall be completely insulated from road and vehicle resonance, exterior sound and thermal intrusion.

The cab insulation system shall be comprised of three separate components each designed to assure optimal thermal and acoustic properties are achieved. Two layers of insulation material shall be utilized in conjunction with a .2" air barrier.

The cab shall utilize at a minimum 10 mils of flexible extensional visco elastic vibration damping insulation offering excellent acoustic reduction properties.

A minimum of .8" of SCbond Polyurethane Foam insulation shall be applied as an additional insulation between the cab skin and all interior ceiling surfaces. The insulation shall have a density of 10 lb/ft³ +/- .5 providing better thermal properties and acoustic reduction properties.

The interior cab insulation system shall ensure that no seated position within the cab exceeds 72dB as certified by the manufacture. This decibel rating shall be measured with the apparatus traveling 45 mph with climate control settings off.

All insulation used in the construction of the cab shall be marine grade featuring longevity and resistance to degradation.

Use of open cell material as the primary insulation will not be acceptable. No exceptions.

The interior of the cab including the rear wall and ceiling panels shall be insulated.

Use of open cell material as the primary insulation will not be acceptable. No exceptions.

DAMPING INSULATION

The entire cab, including the ceiling and walls shall include additional insulation reducing structure borne noise from vibration, impact and resonance within the cab.



ENGINE TUNNEL INSULATION

The engine tunnel shall include an insulated barrier from noise on the underside of each tunnel surface. This barrier shall be engineered for surrounding engines.

The insulation barrier shall provide an acceptable decibel level within the cab meeting or exceeding the recommendations of NFPA 1901.

The thickness of the engine tunnel insulation shall be 1" thick. The insulating material shall be open cell polyether based foam with a textured surface, specifically designed for acoustic absorption.

Use of aluminized faced material on the engine tunnel shall not be acceptable. No exceptions.

The engine tunnel insulation shall be precisely cut and sealed to fit each segment on the underside of the tunnel surface. The insulation shall then be affixed by a pressure sensitive adhesive.

The insulation shall meet or exceed FMVSS 302 flammability testing.

INTERIOR TRIM MATERIAL

The interior trim shall feature a 31 oz. marine grade vinyl which features a tensile strength of ASTM D751 of excellent, tear strength meeting the Federal standard 191-5134 of excellent and shall be oil resistant passing the CID-A-A-2950A requirement for no permeation.

Due to the excellent qualities of the marine grade vinyl material, no other type of interior trim shall be acceptable. No Exceptions.

The soft trim vinyl shall feature mildew resistance passing ASTM G21-90 and shall be rated to - 25 degrees Fahrenheit.

The vinyl shall be flame retardant meeting California Fire Code 117, UFAC Class 1, and BIFMA Class 1 and shall have a high resistance to abrasion.

The interior of the cab including the ceiling panels shall feature this soft trim and shall be black in color.

INTERIOR TRIM MATERIAL

The rear wall of the cab shall be Line-X coated aluminum for a durable finish. The color shall be black.



FLOOR MAT

The interior flooring of the cab shall be covered with an advanced black multi-layer acoustic dampening mat. The floor matting shall be an open/closed cell, flexible polyurethane polyamide material with frictional dampening and dissipation properties. The mat shall be a fire and skid resistant non-wicking material.

SUN VISORS

The driver and officer seats shall feature a sun visor mounted in the header over each seating position. The sun visors shall be gray tinted plastic.

INTERIOR CAB FINISH

The interior cab shall be finished in a high performance polyurethane coating including the interior A, B, C and D pillars, all occupant seat frames and any surrounding surfaces extending to the ball seal around each door. This type of coating shall feature:

- Durability, scratch, chemical and abrasion resistance
- Consistent, even coverage and a uniform texture
- Resistance from fading from exposure to UV light
- Black in color

ENGINE TUNNEL

The distance from the back of the tunnel to the interior wall shall be 40" measured at floor level and 46" at top of engine tunnel. No Exception.

The engine tunnel shall be constructed of aluminum offering superior durability in addition to thermal and acoustic resistance.

The tunnel shall feature a polyurethane coating which shall match the dash and header in texture and color for a consistent appearance and robust finish.



The engine tunnel shall feature:

- A low profile design measuring approximately 46.5" wide and 23-1/2" in height from the crew floor shall offer optimum visibility of the windshield and cab interior from any seated position. No Exception.
- The engine tunnel at the driver's position shall be a tapered design, featuring 24" clear width at floor level, the taper shall start 16" from floor level and taper inward and end at the top of the engine tunnel a clear width of 29-1/2".
- The engine tunnel at the officer's position shall be a tapered design, featuring 22-1/2" clear width at floor level, first taper shall start 16" from floor level and taper inward end at the top of the engine tunnel for a clear width of 28-1/2".
- The design shall offer a minimum of 30" for the driver and 28-1/2" for the officer as measured from the inside door pan to the top edge of the tunnel.

CAB DASH

The cab dash shall offer heavy duty, durable construction from formed aluminum. The cab dash shall be finished with an advanced polyurethane coating for a rugged finish.

The polyurethane finish shall provide a tough, flexible, impact-absorbing, chemical & abrasion-resistant, even-textured and skid-resistant surface. The polyurethane finish shall offer durability and scratch resistance even against today's advanced firefighting turnout materials with consistent, even coverage and a uniform texture. The polyurethane coating finish shall resist fading from UV light.

This construction shall allow for a clean, seamless dash area that shall reduce unnecessary joining of cab dash components. This design allows for the following features:

- Optimal heating and cooling of cab occupants, HVAC louvers shall be integrated into the gauge panel with a total of six (6) louvers; three louvers pointing at the driver and three louvers pointing at the officer.
- For improved safety cab switches and controls shall be ergonomically located within easy reach of the driver when in the seated position with seatbelts fastened. This design will reduce driver distraction and increase safety by putting frequently accessed driver controls within easy reach to allow the driver more time to focus on the road.
- The officer side cab dash shall house the three HVAC louvers on the officer side. This panel will also provide ergonomically located switches and controls for the officer. All controls shall be within easy reach while in the seated position with seatbelts fastened.



- Access panels on the top of the dash for both the driver and officer sides easing maintenance access to controls, components and gauge assemblies
- The driver side dash shall include gauges for primary air pressure, secondary air pressure, a Pacific Insight instrumentation gauge panel and the DEF gauge as standard
- The driver side dash shall also include two (2) lower panels to the left and right of the steering column for FMVSS switches such as the Off/Ignition and start switches and the park brake assembly
- The dash shall include a provision for switches to the right of the Driver
- The officer dash shall include a flat area for optional mounting cradles or brackets for a laptop computer, mobile data terminal, map compartment or clip board
- The officer dash shall include a provision for switches to the left of the Officer

CAB DASH & ENGINE TUNNEL

The cab dash and the engine tunnel of the cab shall be coated with Line-X bed liner coating for a durable finish. The color shall be black.

Air Filtration System

CUP HOLDER

Two (2) cup holders shall be provided. There shall be one mounted on both the driver and officer side, and shall be in the forward outer portion on the upper portion of the dash.

INSTRUMENTATION PANEL

The instrumentation panel inlay shall be powder coat black.

CAB HEADER - HEAT AND AC

Cab Header / Heating and AC



CAB HEADER

The cab header shall offer heavy duty, durable construction using aluminum. The material shall be .13" thick.

Non-Metal construction shall not be acceptable. No Exceptions.

The cab header shall offer a finish of a polyurethane coating for a rugged design and finish. No Exceptions.

The polyurethane finish shall provide a tough, flexible, impact-absorbing, chemical & abrasion-resistant, even-textured and skid-resistant surface. The polyurethane finish shall offer durability and scratch resistance even against today's advanced firefighting turnout materials with consistent, even coverage and a uniform texture. The polyurethane coating finish shall resist fading from UV light.

HVAC HEATING AND COOLING SYSTEMS

The interior cab climate control shall be comprised of a dual system which shall include a defroster, a cab and crew heater and air conditioner for a complete HVAC system. The air conditioning system shall be comprised of compressor, condenser, and a minimum of two (2) evaporators to provide consistent temperature control throughout the entire cab. No Exceptions.

The system shall be rated as an Emergency Vehicle grade for the use in Fire and Rescue style vehicles and shall provide environmental air treatment in accordance with published SAE standards.

The HVAC system shall be a total and complete system, not incorporating the use of auxiliary heating and cooling systems. The HVAC system shall provide sufficient defrosting, heating and cooling to the entire cab without the need for any auxiliary systems.



DEFROSTING SYSTEM

The defrosting system shall feature:

- To provide maximum defrost and heating performance, a 30,000 BTU heater-defroster unit with 718 CFM of air flow will be provided inside the cab.
- The defroster unit will be strategically located under the center forward portion of the instrument panel. For easy access, a removable cover will be installed over the defroster unit.
- Mounting under the dash with fresh air intake providing excellent defrost and demist capabilities. Systems not utilizing fresh intake shall not be acceptable. No Exceptions.
- Six (6) vents shall be located in the top forward portion of the dash for superior defrosting properties across the entire windshield.
- The system shall be capable of clearing 90 percent or more of the windshield in fifteen (15) minutes or less after a three (3) hour cold soak at 0 degrees Fahrenheit (-17.78 degrees Celsius).
- The system shall exceed Flash Fogging standards that are set forth in the SAE Heavy Duty Cab with Sleeper specifications. Documentation from a third party testing facility shall be available upon request. No Exception.
- The defroster will include an integral aluminum frame air filter, high performance dual scroll blowers, and ducts designed to provide maximum defrosting capabilities for the one (1) piece windshield.

HEATING SYSTEM

The heating system shall feature:

- Delivery of a minimum of 48,000 BTU/hour of heat to the entire cab.
- Heat and air circulation shall be provided to the driver and officer foot area of the cab as standard through ducting in the foot well area of both positions.
- Substantial air movement and heating provided to the driver and officer's position, with six (6) adjustable louvers, located in the dash, three (3) adjustable louvers directed at the driver and three (3) adjustable louvers directed at the officer



- A single engine tunnel mounted unit shall be supplied at the rear of the engine tunnel.
- Substantial air flow and heat provided to the crew area of the cab, with adjustable louvers.
- There shall be a minimum of 3,324 CFM of air flow per unit on the highest setting and a minimum of 718 CFM of airflow on the lowest setting, per unit.
- The heater shall be plumbed with a shut off valve at the engine, so that the coolant by-passes the heaters.

AIR CONDITIONING

The air conditioning system shall feature:

- A minimum of 78,000 BTU/hour of cooling capacity to the entire cab.
- One (1) evaporator shall be located under the center dash and One (1) crew evaporator shall be located at the rear of the engine tunnel between the rear facing seats.
 - The tunnel mounted evaporator shall have a aluminum cover, proposals offering a plastic cover shall not be accepted. No Exception
 - The cover shall be coated in the same coating and the same color as the dash.
- A gravity condensation drain system shall be utilized.
- Substantial air movement and optimum cooling provided to the driver and officer positions, with six (6) adjustable louvers, located in the dash, three (3) adjustable louvers directed at the driver and three (3) adjustable louvers directed at the officer
- Substantial air flow and optimum cooling provided to the crew areas of the cab, with adjustable louvers facing the crew seating positions.

Proposals offering ceiling mounted evaporator units in the center of the cab above the engine tunnel shall not be accepted as this is a safety consideration due to the lack of visibility and communication within the cab.

CAB PAINT AIR CONDITIONING CONDENSER COVER

The air conditioning condenser cover shall be made out of aluminum and shall be painted to match the roof color. Plastic condenser covers will not be acceptable. No Exception.

HEATER HOSE

The heater hose inside the cab for the HVAC system shall be premium silicone hose.



CONDENSER

The cab air conditioning system shall include one (1) low profile HE-condenser which shall be centered forward on the roof of the cab.

HEATING AND COOLING CONTROLS

The HVAC system shall be controlled from the Driver dash through three (3) turn style knobs for the temperature control, the fan control and for the mode.

REAR CREW AREA CONTROLS – EVAPORATOR MOUNTED

The controls for the crew area heat and A/C shall be located on the tunnel mounted evaporator unit.

SEAT AND SEAT BELT COLOR

This seat in the cab shall be gray in color with a red seat belt.

DRIVER SEAT

The Driver's seat shall be a Seats Incorporated ADVOCATE SERIES. The seat shall be designed with Fire Fighters' needs in mind; the Advocate Series encompasses Originality, Safety, Functionality, and Versatility.

The seat shall include 10-way, include 108 degree recline, and 2-way lumbar. Electronic adjustments include fore/aft, up/down, front/rear tilt. The seat shall come with an NFPA compliant occupancy sensor housed outside the cushion; sensor removal to be tool free.

The seat(s) shall have a 7-year manufactures warranty no exception.

SEAT BELT SINGLE RETRACTOR

The seat shall feature 3pt ABTS (all belts to seats). The seat belt shall feature Ready Reach to ensure that the seat belt is easy to see and grab while in full turnout gear.

SEAT BACK

The seat back shall incorporate a standard style headrest.



SEAT MOUNTING DRIVER

The driver's electric seat shall be installed in an ergonomic position in relation to the cab dash.

The power seat or seats installed in the cab shall be wired directly to battery power.

SEAT MATERIAL

The seats cushions shall be FushionFoam. The cushions shall be cover and foam cushion fused into one. The unique foam cushion integration shall allow for a seamless, water resistant cushion to allow for unmatched cleanability. FushionFoam shall also allow for tool free removal for ease of cleaning and replacement. No Exception.

DRIVER SEAT BOX STORAGE COMPARTMENT

There shall be a storage area under the driver's seat. The compartment shall be 21.25 inches wide, 22.50-inches long, and 6.25 inches high. The access opening shall be 15.00 inches wide and 4.50 inches high.

ALUMINUM ACCESS DOOR

There shall be an aluminum door cover provided for the driver and officer seat compartment. The door shall be coated to match the interior of the cab, and it shall be equipped with a piano style hinge and a manual latch.

OFFICER SEAT

The Officer's seat shall be a Seats Incorporated ADVOCATE SERIES. The seat shall be designed with Fire Fighters' needs in mind; the Advocate Series encompasses Originality, Safety, Functionality, and Versatility.

The seat shall include 10-way, include 108 degree recline, and 2-way lumbar. Electronic adjustments include fore/aft, up/down, front/rear tilt. The seat shall come with an NFPA compliant occupancy sensor housed outside the cushion; sensor removal to be tool free.

The seat(s) shall have a 7-year manufactures warranty no exception.

SEAT BELT SINGLE RETRACTOR

The seat shall feature 3pt ABTS (all belts to seats). The seat belt shall feature Ready Reach to ensure that the seat belt is easy to see and grab while in full turnout gear.



SEAT BACK

The seat back shall incorporate a standard style headrest.

SEAT MATERIAL

The seats cushions shall be FushionFoam. The cushions shall be cover and foam cushion fused into one. The unique foam cushion integration shall allow for a seamless, water resistant cushion to allow for unmatched cleanability. FushionFoam shall also allow for tool free removal for ease of cleaning and replacement. No Exception.

REAR FACING OUTER SEAT

The two (2) rear facing crew seat(s) shall be a Seats Incorporated ADVOCATE SERIES. The seat(s) shall be designed with Fire Fighters' needs in mind; the Advocate Series encompasses Originality, Safety, Functionality, and Versatility.

The seat shall be a fixed seat and shall feature the slide-fit system which allows for a choice of various back recline angles while moving the occupant's tailbone away from the SCBA. The seat shall come standard with the option to leave the seat base as a flip down cushion or lock the cushion out to create a fixed seat cushion. The head rest shall be a flip headrest with height adjustment to accommodate various occupants of various heights.

The seat shall come with an NFPA compliant occupancy sensor housed outside the cushion; sensor removal to be tool free.

The seat(s) shall have a 7-year manufactures warranty no exception.

SEAT BELT SINGLE RETRACTOR

The seat shall feature 3pt ABTS (all belts to seats). The seat belt shall feature Ready Reach to ensure that the seat belt is easy to see and grab while in full turnout gear.

SEAT BACK

The seat back shall incorporate a standard style headrest.

REAR FACING OUTER SEAT MOUNTING

Each rear facing outer seat shall be mounted facing the rear of the cab.



SEAT MATERIAL

The seats cushions shall be FushionFoam. The cushions shall be cover and foam cushion fused into one. The unique foam cushion integration shall allow for a seamless, water resistant cushion to allow for unmatched cleanability. FushionFoam shall also allow for tool free removal for ease of cleaning and replacement. No Exception.

REAR FACING OUTER SEAT MOUNTING

Each rear facing outer seat shall be mounted facing the rear of the cab.

FORWARD FACING SEAT

The two (2) forward facing crew seat(s) shall be a Seats Incorporated ADVOCATE SERIES. The seat(s) shall be designed with Fire Fighters' needs in mind; the Advocate Series encompasses Originality, Safety, Functionality, and Versatility.

The seat shall be a fixed seat(s) and shall feature the slide-fit system which allows for a choice of various back recline angles while moving the occupant's tailbone away from the SCBA. The seat shall come standard with the option to leave the seat base as a flip down cushion or lock the cushion out to create a fixed seat cushion. The head rest shall be a flip headrest with height adjustment to accommodate various occupants of various heights.

The seat shall come with an NFPA compliant occupancy sensor housed outside the cushion; sensor removal to be tool free.

The seat(s) shall have a 7-year manufactures warranty no exception.

SEAT BELT SINGLE RETRACTOR

The seat shall feature 3pt ABTS (all belts to seats). The seat belt shall feature Ready Reach to ensure that the seat belt is easy to see and grab while in full turnout gear.

SEAT BACK

The seat back shall incorporate a standard style headrest.

SEAT MATERIAL

The seats cushions shall be Fushion Foam. The cushions shall be cover and foam cushion fused into one. The unique foam cushion integration shall allow for a seamless, water resistant cushion to allow for unmatched cleanability. Fushion Foam shall also allow for tool free removal for ease of cleaning and replacement. No Exception.



SEAT FRAME FORWARD FACING

The forward facing center seat(s) shall include a seat riser(s) which is located and installed on the track along the rear wall.

The seat box shall be constructed of no less than 5052-H32 .19" thick aluminum plate.

SEAT COMPARTMENT FINISH

The seat frame shall be powder coated black.
Forward Facing Mounting Track

SEAT MOUNTING TRACK

The cab shall include an integrated track mounting system that shall accommodate the forward-facing seats or compartments. The track shall be designed to allow the seats or compartments infinite side to side adjustability to accommodate the current and future needs of the department. Any cab that has fixed seat mounts such as boxes or benches or requires the removal of hardware shall not be acceptable. No Exception.

The track system shall include an extruded 60D ethylene propylene monomer rubber that shall be installed in the open areas of the track to help prevent debris from getting in the floor tack system.

EXTERIOR GRAB HANDLES

One (1) 18" exterior assist handle shall be mounted behind each of the cab doors. The grab handle shall be made of 1.25" diameter aluminum to enable non-slip assistance with a gloved hand and mounted on stanchions. The handle shall feature red LED lights which shall illuminate when the respective door is opened. The handles shall be mounted to the cab with nutserts. No Exception.

SCUFF PLATE

The grab handles shall include a stainless steel scuff plate to protect painted surfaces.

GRAB HANDLE LIGHT ACTIVATION

The grab handle lights shall activate when the park brake is engaged.



CAB FASCIA

The cab fascia shall offer a traditional, yet aggressive appearance, in its design and shall be constructed of work-hardened 5052-H32 aluminum. This design shall feature:

- A super structure which is fully welded to the cab, for a seamless and robust integration
- Thermoformed headlamp bezels, constructed of impact resistant, polycarbonate composite which is vacuum metalized to eliminate peeling and bubbling of a chrome type film or plating
- Traditional style headlight bezels with 4 x 6 high intensity headlights which shall add a classic look to the fascia while improving visibility
- The turn signal lights shall be located in the lower outboard portion of the head lamp bezel and a warning light in the lower inboard position

FRONT GRILLE

A prominent front grille shall punctuate the aggressive design of the cab with its outboard wing style warning light bezels and heavy framework. The front grille shall feature:

- Fabricated construction for superior strength and durability
- Stainless Steel mirror finish for a distinctive appearance
- Two (2) 4" x 6" warning light locations in the upper wings
- Up to a minimum of four (4) warning light locations along the mid bar for a variety of warning light combinations

LIGHT BEZEL

The front grille shall include wing light bezels. The bezels shall be constructed of a stainless material.

DEPARTMENT NAME IN CENTER GRILLE BAR

The fire department's name shall be laser cut into the center bar of the stainless steel grille. There shall be room for up to ten (10) characters that are three-inch (3") tall.



GRILLE BACK LIGHTING

The fire department's name shall be back lit in red. The grille light shall come on with the E-Master switch or when the park brake is set.

Backlit Grille Bar Activation - P2P

FRONT GRILLE INLAY

The front grille shall include a honeycomb inlay of steel, painted black, which shall provide air flow to through the grille and provide a sporty, muscular appearance to the front of the apparatus.

The horizontal bars shall be overlaid with polished stainless steel strips.

FLUID FILLS

The engine oil dip stick shall be accessible through the DEF door, and power steering fluid checks shall be accessible through the grille. The transmission fluid level check shall be checked through the selector pad. The fluid fills shall be located under the cab. The windshield washer fill shall be accessible through the front left side mid step. No Exception

HEADLIGHTS

A quadruple headlight assembly shall be provided in the fascia to enhance the look.

HEADLIGHT LOCATION

The headlights shall be located on the front fascia in the upper buckets, on each side of the cab grille.

FRONT TURN SIGNALS

Two (2) Whelen Series 600 LED square front turn signal assemblies shall be supplied. Each turn signal shall be mounted in an attractive façade style bezel which is an integral part of the fascia.

TURN SIGNAL LOCATION

The turn signals shall be located on the front fascia directly below the headlights, one each side of the cab grille.



SIDE MARKER LIGHTS

Two (2) Weldon amber LED round, side marker light assemblies shall be mounted on the side of the cab ahead of the driver door, adjacent to the front head lamp bezel.

HEADLIGHT AND MARKER LIGHT ACTIVATION

The head light and marker lights shall be activated through a switch on the driver's panel.

FRONT MARKER LAMPS

The cab front shall include five (5) LED amber marker lamps above the windshield in accordance with the Department of Transportation requirements.

CAB FENDERS

The cab wheel wells shall include full width, 14 gauge 304 polished, stainless steel cab fenders to resist corrosion and enable easier cleaning maintenance. The inner liner, measuring 18" wide shall be constructed of plastic with an outer fenderette measuring 2.5" wide. The inner liner shall be installed with 410 stainless steel hardware that has been coated with black zinc oxide.

CAB EXTERIOR TRIM

A stainless steel trim band, 10" high, with upper and lower black trim moldings, shall be installed on the lower exterior sides of the cab and doors. The trim shall be installed so that the top edge is even with the top of the front bumper, and shall be affixed without holes and fasteners.

WARRIOR LOGO

A WARRIOR logo shall be installed on each side of the chassis cab.

FRONT MUD FLAPS

The cab and chassis shall be provided with rubber front mud flaps.



CAB TILT SYSTEM

The cab shall be a full tilt style. A hydraulic cab lift system shall be provided consisting of an electric powered hydraulic pump, dual lift cylinders, and necessary hoses and valves.

The dual lift cylinders shall lift the cab 45 degrees from a horizontal plane facilitating easy engine maintenance and possible removal.

The tilt angle shall allow access to the engine and area under the cab without contacting any components mounted to the gravel shield.

The cab shall be locked down by a two (2)-point automatic spring-loaded hook mechanism that actuates after the cab has been lowered.

The cylinders shall include blocking valves which prevent motion when no control buttons are pushed. In the event of a hydraulic system failure, the valves shall retain the fluid in the cylinders.

A redundant mechanical stay arm shall automatically be engaged once the cab has been fully raised. Before lowering the cab, this device must be disengaged using the stay arm control located on the driver's side rear of the cab.

All mounting points shall be bolted directly to the frame rail.

The cab lift safety system shall be interlocked with the parking brake. The cab tilt mechanism shall be active only when the parking brake is set and the battery master switch is in the on position. If the parking brake is release, the cab tilt mechanism shall be disabled. The stay arm shall be safety yellow for high visibility so that it is easy to see whether the arm is in place or not. No Exception

A remote mounted manual back-up pump shall be installed in the event of a system failure of the cab tilt electric pump.

A warning light shall illuminate in the cab instrument panel to indicate whenever the cab is not fully latched in the locked down position, and the parking brake is release.



CAB TILT LOCK DOWN INDICATOR

The cab dash shall include a message located within the dual air pressure gauge which shall alert the driver when the cab is unlocked and ajar. The alert message shall cease to be displayed when the cab is in the fully lowered position and the hold down hooks are secured and locked to the cab mounts.

In addition to the alert message an audible alarm shall sound when the cab is unlocked and ajar and the parking brake is released.

REARVIEW MIRRORS

Bus Style Mirrors

REARVIEW MIRRORS

Ramco model CRM-1350-PCHR bus style mirrors shall be provided. The mirror heads shall be injection molded chrome plated ABS plastic and shall measure 9.75" wide x 13.5" high. The mirrors shall be mounted one (1) on each the driver and officer doors of the cab with polished die-cast aluminum arms.

The mirrors shall feature an upper heated remote controlled flat glass and a lower heated remote controlled convex glass. The mirror control switches shall be located within easy reach of the driver. The mirrors shall be manufactured using the finest quality non-glare glass and shall feature a rigid mounting reducing vibration. The mirrors shall be corrosion free under all weather conditions.

REARVIEW MIRROR REMOTE ACTIVATION

The driver's panel shall include activation for the rearview mirrors remote function. The driver panel shall also include a switch activating the mirrors to be heated.

CAB SINGLE TONE PAINT

The cab surface shall be thoroughly washed with grease cutting solvent (PPG DX330) prior to any sanding. The cab surface shall then be sanded and minor imperfections filled and sanded. The prepared surface shall then be washed again with (PPG DX330) to remove any contaminants from all surfaces to be painted.

The first coating to be applied shall be a pre-treat epoxy primer (.5 to 1.0 dry film build) for maximum adhesion to the body material. The next two to four coats shall be a polyurethane primer resurfacing agent (PPG F4936). The film build shall be 4-6 mils when dry. The primer coat, after appropriate dry time, shall be sanded with 320-600 grit sandpaper to ensure a maximum gloss finish. The last step shall be an application of at least three coats of PPG FDG polyurethane two-component color (single stage). The film build shall be 2-3 mils when dry. The single stage polyurethane shall provide a UV barrier to prevent fading and chalking.



The cab shall then be painted with the specific color designated by the customer with a minimum thickness of 2.00 mils of finished paint, followed by a clear top coat not to exceed 2.00 mils.

CAB PAINT LOWER

The lower or primary cab color shall be PPG _____ color and _____ number.

CAB UNDERCOAT

The cab shall have an undercoat applied prior to the cab being set on the running gear. The undercoat shall be a waterborne, one-component, air dry undercoat formulated to prevent chipping, cracking and marring of painted or unpainted surfaces after exposure to high impact sand, gravel or other abrasive materials. It shall also have high corrosion resistance.

PAINT SPRAY OUT

The customer shall be supplied with a paint spray out for customer approval prior to the cab being painted.

FRONT AXLE

The front axle beam shall be rated to carry 20,000 lbs. and consist of a fabricated box cross section construction with 100ksi plate and a continuous beam architecture to minimize stress points for added durability. The box shaped cross section resists horizontal, vertical, and twisting forces more effectively than traditional I-beam axles while helping to reduce dynamic camber and toe changes therefore a traditional I-beam axle shall not be considered. The axle shall incorporate a removable kingpin feature for ease of kingpin serviceability. The knuckles shall allow for compatibility with disc brakes mounted at the 12 o'clock position and with drum brakes, and allow for wheel cut up to 45 degrees. They shall also utilize premium kingpin bushings and seals to provide enhanced protection from the elements to improve bushing life.

The axle shall be warrantied for five (5) years or five hundred thousand (500,000) miles whichever comes first. No Exception.

FRONT WHEEL BEARING LUBRICATION

The front axle wheel bearings shall be lubricated with oil. The oil level can be visually checked via clear inspection windows in the front axle hubs.



FRONT SUSPENSION

The suspension shall consist of multi-leaf parabolic springs with double wrapped front eye that are packaged within an integrated clamp group that allows for ease of OEM assembly on to the axle beam and reduced part count. The clamp group bolts are tightened on the top of the clamp group opposed to the traditional U-bolt on the bottom making it easier to access with a torque wrench for servicing. The spring shall also include a lower shock attachment with an upturned eye. The springs will contain threaded pin bushings to allow simplification of spring alignment as well as long service life and improved ride quality. The suspension and spring geometry will be optimized to provide improved bump steer and Ackermann. Two ZF Sachs twin-tube shocks shall be provided with the front suspension assembly. The shocks shall be specially developed for parabolic leaf springs with a digressive characteristic curve using a patented piston system. The shocks shall feature multi-stage piston and base valves. The combination of valves shall achieve the desired damping characteristics that are ideal for the application. The suspension shall be rated for a minimum of 20,000 lbs. No Exception.

POWER STEERING GEAR WITH ASSIST

The power steering gear shall be a TRW model TAS 85 and shall include the following:

- A balanced, hydraulic, positive displacement, sliding vane power steering pump which is gear driven from the engine
- One-piece, 2" diameter drag link for maintaining consistent wheel alignment resulting in less maintenance.
- The steering gear shall be mounted on a plane that is at a 9-degree angle in relationship to the center plane of the chassis. This mounting technique is designed to reduce the operating angle of input steering shafts. A more direct, responsive, and smoother handling vehicle will result from these unique design characteristics.

A certified torque and geometry study by TRW shall be available upon request.

CHASSIS ALIGNMENT

The chassis frame rails shall be measured to ensure the length is correct and cross checked to make sure they run parallel and are square to each other. The front and rear axles shall be laser aligned. The front tires and wheels shall be aligned and toe-in set on the front tires by the apparatus manufacturer.

Alignment documentation shall be available upon request.



FRONT AXLE CRAMP ANGLE

The chassis shall have a front axle cramp angle of 45 degrees to the left and right.

FRONT TIRES

The front tires shall be Michelin 385/65R22.5 “L” tubeless radial XZE regional tread.

The front tires shall feature:

- A stamped load capacity of 20,000 pounds per axle with a speed capacity of 68 miles per hour when properly inflated to 130 pounds per square inch

TIRE BALANCING

There shall be counter acting balancing beads used in all of the tires.

FRONT WHEEL

The front wheels shall be Alcoa hub piloted, 22.5" x 12.25" polished aluminum wheels. The hub piloted mounting system shall provide easy installation and shall include two-piece flange nuts. The wheels shall feature one-piece forged strength and shall include Alcoa's Dura-Bright® finish with XBR technology as an integral part of the wheel surface. Alcoa Dura-Bright® wheels keep their shine without polishing. Brake dust, grime and road debris are easily removed by simply cleaning the wheels with soap and water.

FRONT BRAKES

The front brakes shall be Meritor EX225 Disc Plus disc brakes with 17" vented rotors. The disc brakes shall be provided with visual wear indicators.

The front brakes shall include brake chambers supplied by Meritor and shall be approved per application.

STEERING COLUMN AND WHEEL

The cab shall include a Douglas Autotech steering column. The steering column shall feature an 18", four (4) spoke steering wheel located at the driver's position; a five (5) position tilt and 2.25" telescopic adjustment. The steering wheel shall be provided with a black vinyl cover with foam padding and a horn button, self-canceling turn signal switch, four-way hazard switch and headlamp dimmer switch. The steering column shall also incorporate a steering angle sensor.

The chassis shall include dual electric 12-volt horn with a minimum 110 decibels.



REAR AXLE

A single Meritor RS-25-160 driving axle shall be incorporated as the rear axle for the chassis. The axle shall feature:

- Rated capacity of 27,000 pounds
- Heavy duty Hypoid gearing for longer life, increased strength and quieter operation
- Industry-standard wheel ends for compatibility with both disc and drum brakes, and unitized oil seal technology to keep lubricant in and help prevent contaminant damage
- Rigid differential case for high axle strength and reduced maintenance
- Rugged Dependability
- Rectangular shaped, hot formed housing with a standard wall thickness at spring seat of .63" for extra strength and rigidity
- Precision forged, single differential gearing
- 2 year warranty

REAR AXLE DIFFERENTIAL LUBRICATION

The rear axle differential shall be lubricated with oil.

REAR WHEEL BEARING LUBRICATION

The rear axle wheel bearings shall be lubricated with oil.

REAR SUSPENSION

The single rear axle shall feature a Hendrickson Firemaax™ air suspension. The suspension shall include two optimized air springs mounted to cast structural trailing arms, a transverse cross beam for increased roll stability and two heavy duty shock absorbers. Dual air height control valves shall be installed to ensure equal frame height on both sides of the vehicle regardless of the load. Axle alignment is maintained using two eccentric bushings at each frame bracket.

The rear suspension capacity shall be rated at 27,000 pounds.



REAR BRAKES

The rear brakes shall be Meritor EX225 Disc Plus disc brakes with 17.00 inch vented rotors. The disc brakes shall be provided with visual wear indicators.

The rear brakes shall include brake chambers supplied by Meritor and shall be approved per application.

REAR SHOCK ABSORBERS

Shock absorbers shall be supplied by the suspension manufacturer and installed on the rear axle suspension.

REAR TIRE

The rear tires shall be Michelin 12R-22.5 16PR "H" tubeless radial XDN2.

The rear tires shall feature:

- All weather tread designed for premier traction and mileage
- A stamped load capacity shall of 27,120 pounds per axle with a speed capacity of 75 miles per hour when properly inflated to 120 pounds per square inch

TIRE BALANCING

There shall be counter acting balancing beads used in all of the tires.

REAR WHEEL

The rear wheels shall be Alcoa hub piloted, 22.50 inch X 8.25 inch aluminum wheels with a polished outer surface and Alcoa Dura-Bright® wheel treatment with XBR® technology as an integral part of the wheel. The hub piloted mounting system shall provide easy installation and shall include two-piece flange nuts.

VALVE STEM EXTENSION - SINGLE AXLE

To allow for easy checking and inflation of the rear inner tire it shall be equipped with a multi-layer valve stem extension, the layers shall be as follows: starting from the inner to out layer, stainless steel metal core, air tube, stainless steel jacket, protective color.



VEHICLE TOP SPEED

The top speed of the vehicle shall be programmed at approximately 75 MPH +/-2 MPH at governed engine RPM.

BRAKE SYSTEM

A rapid build-up air brake system shall be provided. The air brakes shall include a two (2) air tank, three (3) reservoir system with a minimum of 4152 cubic inch of air capacity. A floor mounted treadle valve shall be mounted inside the cab for graduated control of applying and releasing the brakes. The system shall include an anti-compounding feature. All air reservoirs provided on the chassis shall be labeled for identification.

The rear axle spring brakes shall automatically apply in any situation when the air pressure falls below 25 PSI and shall include a mechanical means for releasing the spring brakes when necessary. An audible alarm shall designate when the system air pressure is below 60 PSI.

A four (4) sensor, four (4) modulator anti-lock braking system (ABS) shall be installed on the front and rear axles in order to prevent the brakes from locking or skidding while braking during hard stops or on icy or wet surfaces. This in turn shall allow the driver to maintain steering control under heavy braking and in most instances, shorten the braking distance. The electronic monitoring system shall incorporate diagonal circuitry which shall monitor wheel speed during braking through a sensor and tone ring on each wheel. A dash mounted ABS lamp shall be provided to notify the driver of a system malfunction. The ABS system shall automatically disengage the auxiliary braking system device when required. The speedometer screen shall be capable of reporting all active defaults using PID/SID and FMI standards.

Additional safety shall be accommodated through Automatic Traction Control (ATC) which shall be installed on the single rear axle. The ATC system shall apply the ABS when the drive wheels loose traction. The system shall scale the electronic engine throttle back to prevent wheel spin while accelerating on ice or wet surfaces.

The Electronic Stability Control (ESC) unit is a functional extension of the electronic braking system. It is able to detect any skidding of the vehicle about its vertical axis as well as any rollover tendency. The control unit comprises an angular-speed sensor that measures the vehicle's motion about the vertical axis, caused, for instance, by cornering or by skidding on a slippery road surface. An acceleration sensor measures the vehicle's lateral acceleration. The Controller Area Network (CAN) bus provides information on the steering angle. On the basis of lateral acceleration and steering angle, an integrated microcontroller calculates a theoretical angular speed for the stable vehicle condition.

The Meritor Wabco ABS and ESC system shall come with a three (3) year/300,000 mile parts and labor warranty.



MUD / SNOW SWITCH

A momentary switch shall be provided and properly labeled “mud/snow”. The switch shall be a rocker switch on a point to point truck or in the Vista on a V-Mux truck. When the switch is pressed once, the system shall allow a momentary wheel slip to obtain traction under extreme mud and snow conditions. During this condition the ATC light shall blink continuously notifying the driver of activation. Pressing the switch again shall deactivate the mud/snow feature.

AIR TANK BRACKETS & STRAPS

The air tank(s) shall be mounted to the frame rail with brackets that are hot dipped galvanized thereby creating a barrier and cathodic protection from corrosion, and eliminating the requirement for finish paint and the subsequent requirements for touch up paint and/or total repaint after a period of time due to nicks, chips and corrosion. Powder coated or painted air tank brackets shall not be accepted. No exception.

All of the air tank straps shall be plastic coated stainless steel cable. No Exception.

PARK BRAKE

Upon application of the push-pull valve in the cab, the rear brakes will engage via mechanical spring force. This is accomplished by dual chamber rear brakes, satisfying the FMVSS parking brake requirements.

Park brake system shall include an anti-compounding feature.

PARK BRAKE CONTROL

A Meritor-Wabco manual hand control push-pull style valve shall operate the parking brake system. The control shall be yellow in color.

The parking brake actuation valve shall be mounted on the driver's side dash to the right of the steering column within easy reach of the driver.



AIR DRYER

The brake system shall include a Wabco System Saver 1200 Plus air dryer with an integral 100 watt heater with a Metri-Pack sealed connector. The system shall have an integrated purge volume and integrated governor.

The system shall have the following features:

- Premium desiccant provides greater water adsorption
- Replaceable spin on cartridge for simple maintenance
- Compact light weight design
- Pressure relief safety valve
- Turbo cut-off valve for boosted compressor applications
- Service components are external for easy replacement
- Common service components proven for reliability and quality
- Integrated with the air governor.

MOISTURE EJECTORS

An automatic moisture ejector with a manual drain provision shall be installed on the wet tank of the air supply system. Manual pet-cock type drain valves shall be installed on all remaining reservoirs of the air supply system.

AIR SUPPLY LINES

A dual air system plumbed with color coded reinforced nylon tubing air lines shall be installed on the chassis. The primary (rear) brake line shall be green, the secondary (front) brake line orange, the parking brake line yellow and the auxiliary (outlet) will be black; in accordance with SAE standards. No Exception.

Brass push-lock type fittings shall be used on the nylon tubing. All drop hoses shall include fiber reinforced neoprene covered hoses.

FRAME

The chassis frame shall consist of two (2) “C” style parallel rails, constructed of high strength low alloy and shall feature the following:

- A Stenx **MODEL 110XF** 10.19” high by 3.63” deep cold rolled steel frame or equivalent.
- .38” thick flange
- Inner channel measuring 9.31" high x 3.25" deep x .25" thick
- The 10.19” frame height shall be maintained throughout the entire length of the frame to allow for maximum storage capacity for the entire apparatus.
- If frame rails that are larger than those specified are to be utilized, the maximum height of each frame rail shall not exceed 10.25” at any point on the frame rail. This will ensure the lowest possible vehicle center of gravity allowing maximum stability as well as providing the lowest body height possible.
- Frame rail shall have a consistent frame web throughout the entire length.
- The entire frame rail design shall be manufactured in the United States of America and readily available on the aftermarket.
- Grade 8 Structural fasteners, Huck bolts shall not be acceptable. No Exception.
- The hardware used for the chassis shall be are to be corrosion resistant. The process shall be dip-spin-bake coated with two coats of zinc/aluminum metal flake coating in an inorganic binder. Coating one is to be zinc flake and coating two is to be aluminum flake. The zinc flakes sacrificially corrode to protect the base metal. The aluminum flakes prolong the life of the zinc. Salt fog test life, based on ASTM B117 on unassembled fasteners, is 1000 hours to red rust. The same test on assembled fasteners is 750 hours to red rust. The two step coating is RoHS compliant as it eliminates the hexavalent chromium used in the passivation of electroplated zinc coatings to create yellow zinc(zinc dichromate). The elimination of the zinc plating also greatly reduces the likelihood that hydrogen embrittlement will occur. Hydrogen embrittlement is a side effect of electroplating that reduces toughness and can lead to fracture. No Exception
- Manufacturer's lifetime warranty



The frame ratings shall be as follows:

- 110,000 PSI minimum yield strength high strength low alloy steel
- Minimum Resisting Bending Moment (RBM) of 2,810,000 inch pounds per rail

To avoid frame cracking and failure over time, the top flange of the frame adjacent to the engine installation shall have a tapered design. Notches for engine components shall not be accepted due to fatigue and the potential for cracking. No Exceptions

UNDER FRAME REINFORCEMENT

An under slung frame reinforcement shall be installed below the frame rails in the transmission area to increase the vertical rigidity of the frame.

The under frame reinforcement provides:

- Enhanced handling
- Improved ride quality
- Increase resistance to frame and cross member fatigue
- Enhanced vehicle stability providing improved safety to occupants

CROSS MEMBERS

There shall be a minimum of seven (7) steel plate cross members installed on the apparatus.

- 50,000 psi minimum yield strength steel plate cross members
- Manufacturer's lifetime warranty to match frame warranty. No Exceptions.
- Installed with one-piece cross member gusset to maximize vertical strength and minimize cross member flex
- Crossmembers can be inverted when required to allow for PTO drive line installation without the need for notching or modifying the cross members in anyway. No Exceptions.



FRONT FRAME EXTENSION

A single piece 80,000 PSI steel extension shall be installed on the front of the frame rails.

- Reduces frame flex which translates into improved vehicle handling and ride quality
- Designs using multiple piece, bolted together extensions will not be acceptable since they are prone to more flexing, possible frame failure and cab cracking
- Allows radiator to be removed through the bottom of the frame extension without tilting the chassis cab
- Minimizes damage to the chassis cab in the event of frontal impact accident
- Maintains structural integrity of the chassis frame rails while attaching bumper extensions of varying lengths
- Splayed or notched frame rails and/or extensions shall not be accepted
- Provides foundational strength and stability of the cab tilt system which provides superior access to engine and cooling components

FRAME FINISH

Prior to assembly, each frame rail section and cross members shall be hot dip galvanized. The galvanizing process will permeate each frame section to prevent rust and corrosion and not be merely an over-coating. The galvanized frame sections shall be provided in the natural finish eliminating the requirement for finish paint and the subsequent requirements for touch up paint and/or total repaint after a period of time due to nicks, chips and corrosion.

Galvanizing shall provide a barrier and cathodic protection from corrosion. During the galvanizing process, the complete frame sections and cross members shall be immersed in molten zinc; except for the cross member that contains the engine mounts. Through diffusion, the zinc shall bond to the steel at the molecular level. The resulting zinc coating shall provide a barrier that shields the steel from the environment.



FRONT FRAME EXTENSION FINISH

The front frame extension shall be hot dipped galvanized to resist weather, dirt and other corrosive material.

Proposals offering powder coated or painted frames shall not be accepted. No Exceptions.

ENGINE

A Cummins ISL 9.0 liter, four-cycle diesel fueled, turbo charged engine shall feature the following:

- One of the highest power to weight ratios in its class
- Heavy-duty replaceable wet liners, roller followers, by-pass oil filtration with replaceable spin on cartridge and targeted piston cooling for longer service in tough work environments
- Improved cooled EGR system
- 543 Cubic inches of displacement
- High pressure common rail fuel system producing a precise quantity of fuel at ultra high pressures
- Fully integrated, robust electronic engine controls
- Electric fuel lift pump. No Exceptions.

The engine shall be coupled with a Holset VGT™ (Variable Geometry Turbocharger).

The engine shall be filled with Citgo brand Citgard 500 (or equivalent) SAE 15W40 CJ4 low ash engine oil for proper engine lubrication.

The engine shall be EPA certified to meet the 2017 emissions standards without compromising performance, reliability or durability using cooled exhaust gas recirculation and selective catalytic reduction technology.

The engine shall include an original equipment manufacturer installed oil drain plug.

The engine shall include programming which will govern the top speed of the vehicle.



ENGINE PLACEMENT

The engine shall be a maximum of 36" from the center line of the front axle to the front face of the engine block. The engine valve cover shall be a maximum of 23" from the top of the frame.

The engine placement shall provide optimal weight distribution to the front axle to enhance vehicle handling. More weight out in front of the front axle can cause a "fulcrum effect" and cause unsafe "bump steer" conditions.

The engine shall be mounted in a position that provides for the lowest possible height of the interior engine tunnel. An engine tunnel height from the floor of the chassis cab shall be no more than 21" high inside the cab.

AIR COMPRESSOR

The air compressor provided for the engine shall be a Wabco® SS318 single cylinder pass-through drive type compressor which shall be capable of producing 18.7 CFM at 1200 engine RPMs. The air compressor shall feature a higher delivery efficiency translating to more air delivery per horsepower absorbed. The compressor shall include an aluminum cylinder head which shall improve cooling, reduce weight and decrease carbon formation. Superior piston and bore finishing technology shall reduce oil consumption and significantly increasing the system component life.

AIR GOVERNOR

An air governor shall be provided to control the cut-in and cut-out pressures of the engine mounted air compressor. The governor shall be calibrated to meet FMVSS requirements. The air governor shall be integrated in the air dryer assembly.

HORSEPOWER

The engine shall have 500 horsepower at 1800 RPM, with a governed speed of 2000 RPM.

The engine shall have 1695 foot pounds of torque at 1000 RPM.



ENGINE FAN DRIVE

The engine cooling system fan shall incorporate a thermostatically controlled, one (1) piece eleven (11) blade Horton clutched type fan drive, and shroud.

When the clutched fan is disengaged it shall facilitate improved vehicle performance, cab heating in cold climates, and fuel economy. The fan clutch design shall be fail safe so that if the clutch drive fails, the fan shall engage to prevent engine overheating due to the fan clutch failure.

The clutch fan shall automatically engage in pump mode (when applicable).

AUXILIARY ENGINE BRAKE

A Cummins engine compression brake, for the six (6) cylinder engine, shall be provided. The engine compression brake shall:

- Activate upon 0% accelerator when in operation mode and activate the vehicle's brake lights.

TRANSMISSION PRE-SELECT

When the auxiliary brake is engaged, the transmission shall automatically shift to second gear to decrease the rate of speed. The transmission shall assist the secondary braking system, thereby slowing the vehicle.

AUXILIARY ENGINE BRAKE CONTROL

An auxiliary engine brake control device shall be included. The electronic control device shall monitor various conditions and shall activate the engine brake only if all of the following conditions are simultaneously detected:

- A valid gear ratio is detected.
- The driver has requested or enabled engine compression brake operation.
- The throttle is at a minimum engine speed position.
- The electronic controller is not presently attempting to execute an electronically controlled final drive gear shift.

The auxiliary brake shall be controlled through an on/off switch and individual low/medium/high selector switches on the Driver's panel.



ENGINE PROGRAMMING HIGH IDLE SPEED

The Engine high idle will be set at 1250 RPM. The high idle will be operational only when the parking brake is set and the truck transmission is in neutral.

ENGINE HIGH IDLE CONTROL

The vehicle shall be equipped with an automatic high-idle speed control. It shall be pre-set so when activated, it will operate the engine at the appropriate RPM to increase alternator output and optimize output of the HVAC system.

This device shall operate only when the master switch is activated and the transmission is in neutral with the parking brake set. The device shall disengage when the operator depresses the brake pedal, or the transmission is placed in gear, and shall be available to manually, through a switch, or automatically re-engage when the brake is set, or when the transmission is placed in neutral.

ENGINE AIR INTAKE

The engine air intake system shall include an ember separator air intake filter which shall be located behind the fascia.

The filter shall protect the downstream air filter from embers using a combination of unique flat and crimped metal screens constructed into a corrosion resistant steel frame.

This multilayered screen shall be designed to trap embers or allow them to burn out before passing through the pack, while creating only minimal air flow restriction through the system. Periodic cleaning or replacement of the screen shall be all that is required after installation.

The intake shall also feature a cyclone style water separator to remove unwanted moisture from incoming air.

The engine shall include an air intake filter which shall be bolted to the frame and located under the front of the cab. This dry type filter shall ensure dust and debris is safely contained inside the disposable housing, eliminating the chance of contaminating the air intake system during air filter service via a leak-tight seal.

The filter must have a capacity of no less than 1350 cubic feet of air per minute. The filter paper media must be of a flame retardant treated material. An electric air filter restriction indicator shall also be included with the system.



ENGINE EXHAUST SYSTEM

The exhaust system shall include a one piece diesel particulate filter (DPF), a diesel oxidation catalyst, and a selective catalytic reduction catalyst (SCR) to meet current EPA standards. The selective catalytic reduction catalyst shall utilize a diesel exhaust fluid solution consisting of urea and purified water to convert nitrogen oxide into nitrogen, water, and trace amounts of carbon dioxide. The solution shall be injected into the system between the DPF and SCR chambers.

The system shall utilize 0.065 inch thick stainless steel exhaust tubing between the engine turbo and the DPF.

The after treatment canister through the end of the tailpipe shall all be connected with zero leak gasketed clamps. The discharge shall terminate horizontally on the right side of the vehicle ahead of the rear tires with an exhaust gas diffuser.

The diffuser shall lower exhaust gas temperatures during the regeneration cycle.

DIESEL EXHAUST FLUID TANK

There shall be a molded cross linked polyethylene tank for the Diesel Exhaust Fluid (DEF). The tank shall have a capacity of not less than five (5) usable gallons (18.92 Liters) and shall be mounted on the left hand side of the chassis frame in front of the batteries below the frame.

The DEF tank shall be designed with capacity for expansion in case of fluid freezing. Engine coolant, which shall be thermostatically controlled, shall be run through lines in the tank to help prevent the DEF from freezing and to provide a means of thawing the fluid if it should become frozen.

DIESEL EXHAUST FLUID TANK

There shall be an access door provided in the top rear step of left side crew area for access to the DEF tank.

ENGINE EXHAUST ACCESSORIES

An exhaust temperature mitigation device shall be shipped loose for installation by the body manufacturer on the vehicle. The temperature mitigation device shall lower the temperature of the exhaust by combining ambient air with the exhaust gasses at the exhaust outlet.



ENGINE EXHAUST WRAP

The exhaust tubing between the engine turbo and the diesel particulate filter (DPF) shall be wrapped with a thermal cover in order to retain the necessary heat for DPF regeneration. The exhaust wrap shall also help protect surrounding components from radiant heat which can be transferred from the exhaust.

DIESEL PARTICULATE FILTER CONTROLS

Provide DPF system status annunciation indicator lights, lights shall be installed on driver dash to alert driver when regeneration is needed and when DPF is in an active re-generation cycle.

Warning systems shall provide DEF low level warning.

Driver's dash shall be provided with two (2) controls for the Diesel particulate filter; one (1) manual regeneration switch to activate a regeneration cycle manually when passive burn is unobtainable due to driving conditions; and one (1) Regen "Inhibit Switch".

The switches shall be located in a covered location.

ENGINE COOLING SYSTEM

The radiator and the complete cooling system shall meet or exceed NFPA and engine manufacturer cooling system requirements.

The system shall include and feature the following:

- A vertically stacked charge air cooler providing the maximum cooling capacity for the engine. Proposals offering horizontally stacked charge air cooler shall not be acceptable. No Exceptions
- The charge air cooler and radiator shall measure not less than 1214 square inches
- A surge tank with a low coolant probe and capable of removing entrained air from the cooling system, with built in sight glass
- Radiator re-circulation shields to prevent heated air from re-entering the cooling system and affecting performance
- Mounts allowing the entire radiator to drop through the frame for service when needed - No Exceptions



- Engine placement shall provide a minimum of 8” between the engine fan and radiator to maximize the airflow and cooling of the engine.
- A Spin on Element water filter with corrosion inhibitor shall be provided for the cooling system. No Exception.
- The coolant filter shall be provided with two (2) shut off valves, one (1) one inlet and one (1) outlet. No Exception.
- Cooling system shall be tested and certified by the engine manufacturer

COOLANT HOSES

The cooling systems hose shall be formed silicone hose and formed aluminized steel tubing and include constant tension spring clamps.

ENGINE COOLANT

The cooling package shall include Extended Life Coolant (ELC). The use of ELC provides longer intervals between coolant changes over standard coolants providing improved performance. The coolant shall contain a 50/50 mix of ethylene glycol and de-ionized water to keep the coolant from freezing to a temperature of -34 degrees F.

Supplemental coolant additives (SCA) are not required as this is part of the extended life coolant makeup.

ADDITIONAL COOLANT SHUT OFF VALVE

An additional coolant shut off valve with connection shall be installed in the chassis coolant lines with a connector. This shall allow for the installation of an additional heater such as a pump compartment heater without draining the coolant system.

ENGINE PUMP HEAT EXCHANGER

A single bundle type coolant to water heat exchanger shall be installed between the engine and the radiator. This pump heat exchanger shall circulate water from the fire pump to the heat exchanger thereby reducing the temperature of the coolant for the engine. The heat exchanger shall be designed to prohibit water from the pump from coming in contact with the engine coolant.



TRANSMISSION

The drive train shall include an Allison model EVS 4000 torque converting, automatic transmission which shall include electronic controls. The transmission shall feature two (2) 10-bolt PTO pads located on the converter housing; one (1) in the 8:00 o'clock position and one (1) in the 1:00 o'clock position.

The transmission shall include two (2) internal oil filters and Allison approved transmission fluid which shall be utilized in the lubrication of the EVS transmission. An electronic oil level sensor shall be included with the readout located in the shift selector.

The Gen transmission shall include prognostic diagnostic capabilities. These capabilities shall include the monitoring of the fluid life, filter change indication, and transmission clutch maintenance.

The transmission gear ratios shall be:

1st	3.51:1
2nd	1.91:1
3rd	1.43:1
4th	1.00:1
5th	0.74:1
6th	0.64:1 (if applicable)
Rev	4.80:1

TRANSMISSION COOLING SYSTEM

The transmission shall include a water to oil cooler system located in the cooling loop between the radiator and the engine. The transmission cooling system shall meet all transmission manufacturer requirements. The transmission cooling system shall feature continuous flow of engine bypass water to maintain uninterrupted transmission cooling.

TRANSMISSION DRAIN PLUG

The transmission shall include an original equipment manufacturer installed magnetic oil drain plug.

AUTOMATIC NEUTRAL

The transmission shall be provided with an automatic neutral. When the parking brake is applied the transmission automatically returns to neutral.



TRANSMISSION FLUID

The transmission shall include two (2) internal oil filters and Allison approved transmission fluid which shall be utilized in the lubrication of the EVS transmission. An electronic oil level sensor shall be included with the readout located in the shift selector.

TRANSMISSION SHIFT SELECTOR

An Allison GEN V pressure sensitive range selector touch pad shall be provided and located on the tunnel to the right of the driver.

The shift selector shall provide an indicator on the digital display and shall alert the driver/operator when a specific maintenance function is required.

PTO LOCATION

The transmission driven power take off (PTO) shall be mounted in the 1:00 o'clock position.

TRANSMISSION MODE PROGRAMMING

The transmission, upon start-up, will select a six (6) speed operation without the need to press the mode button.

TRANSMISSION PROGRAMMING

The EVS group package number 127 shall contain the 198 vocational package for the fire service for this apparatus as a Pumper. This package shall incorporate an automatic neutral with selector override. This feature commands the transmission to neutral when the park brake is applied, regardless of drive range requested on the shift selector which requires re-selecting the drive range to shift out of neutral for the override.

This package shall be coupled with the use of a split shaft PTO and incorporate pumping circuits. The transmission will detect the pump engaged signal and automatically select or deselect fourth gear lock-up. These circuits shall be used allowing the vehicle to operate in the fourth range lockup while operating the pump mode due to the 1 to 1 ratio through the transmission, therefore the output speed of the engine is the input speed to the pump. The pump output can be easily calculated by using this input speed and the drive ratio of the pump itself to rate the gallons of water the pump can provide.

A nine (9) pin diagnostic connector will be provided next to the steering column.



The trans module shall contain the following circuits:

Function ID	Description	Wire assignment
C	PTO Request	142
J	Fire Truck Pump Mode (4th Lockup)	122 / 123
C	Range Indicator	145 (4th)
G	PTO Enable Output	130
	Signal Return	103

DRIVELINE

All drivelines shall be heavy duty metal tube and equipped with Spicer 1810 series universal joints.

The shafts shall be dynamically balanced prior to installation to alleviate future vibration. In areas of the driveline where a slip shaft is required, the splined slip joint shall be coated with Glide Coat®.

FUEL FILTER/WATER SEPARATOR

The fuel system shall have a Fleetguard FS1065 fuel filter/water separator as a primary filter. The fuel filter shall have a drain valve.

A water in fuel sensor shall be provided and wired to an instrument panel lamp and audible alarm to indicate when water is present in the fuel/water separator.

A secondary fuel filter shall be included as approved by the engine manufacturer.



FUEL SYSTEM

The fuel tank shall have a capacity of sixty-eight (68) gallons/two hundred fifty-seven (257) liters.

The tank shall offer:

- Beveled Rear Corner to allow for better angle of departure.
- A vent port which will facilitate venting to the top of the fill neck for rapid filling without any "blow-back"
- Two (2) 2" NPT fill ports for left and right hand fill with a .5" NPT drain plug centered side to side, 9" from the front of the tank
- A roll over ball check vent for temperature related fuel expansion and draw
- A design including dual draw tubes and sender flanges
- A baffled design which shall be constructed of steel
- A black Powder Coated exterior to ensure corrosion resistance

The fuel tank shall be mounted below the frame, behind the rear axle. There shall be two (2) three-piece strap hanger assemblies with "U" straps bolted midway on the fuel tank, allowing the tank to be easily lowered and removed for service purposes.

The strap hanger material shall be stainless steel. No Exceptions.

For isolation of vibration and movement, rubber isolating pads shall be provided between the tank and the hanger strap assemblies. The tank straps shall be attached to rubber coated cross members which help isolate the tank from frame flex.

Strap mounting studs through the rail, hidden behind the body shall not be acceptable.

All fuel lines shall be connected with steel fittings with all fittings pointed towards the right side (curbside) of the chassis.

The chassis fuel lines shall feature an additional 4' of length provided so the tank can be easily lowered and removed for service purposes which shall be coiled and secured at the top of the tank.



FUEL LINES

The fuel system supply and return lines installed from the fuel tank to the engine shall be black aramid braided lines with a fiber outer braid. The fuel lines shall connect with reusable steel fittings. Fuel line is compatible with bio-fuel blends.

FUEL SHUTOFF VALVE

Two (2) fuel shutoff valves shall be installed at the fuel filter to allow the fuel filter to be changed without loss of fuel to the fuel pump.

FUEL COOLER

The cross flow air to fuel cooler shall be all aluminum and shall be provided to lower fuel temperature allowing the vehicle to operate at higher ambient temperatures. The fuel cooler shall be located behind the battery box, under the frame.

The fuel cooler shall incorporate a fan for improved heat transfer.

The fuel cooler shall be mounted to the frame using hot dipped galvanized brackets. Powder coated or painted brackets shall not be acceptable. No exception.

FUEL TANK SERVICE LINE

The fuel lines shall be extended to 12'.

ALTERNATOR

The charging system shall include a 275 amp Delco Remy 40SI 12 volt alternator. The alternator shall feature:

- Premium brushless design providing added durability and life
- Provide the highest efficiency resulting in less horsepower requirements
- Remote sense technology in extending the life of the battery
- 70% efficiency
- 3 Year warranty



ELECTRICAL SYSTEM

There shall be a 12 volt direct current single starting electrical system providing power to all components for the cab and chassis. The system shall feature:

- 300 degree Fahrenheit high temperature, flame retardant loom
- All SAE wiring color coded and labeled as to its function
- Wiring which is cross link with 311 degree Fahrenheit insulation
- A suppressed system in accordance with SAE J551

The primary power distribution will be located forward of the officer's seating position and be easily accessible while standing on the ground for simplified maintenance and troubleshooting. Additional electrical distribution centers will be provided throughout the vehicle to house the vehicle's electrical power, circuit protection, and control components. The electrical distribution centers will be located strategically throughout the vehicle to minimize wire length. For ease of maintenance, all electrical distribution centers will be easily accessible. All distribution centers containing fuses, circuit breakers and/or relays will be easily accessible.

Circuit protection devices, which conform to SAE standards, will be utilized to protect electrical circuits. All circuit protection devices will be rated per NFPA requirements to prevent wire and component damage when subjected to extreme current overload.

General protection circuit breakers will be a combination of automatic and manual reset breakers. This will provide a durability and capacity maximization of the electrical system. When required, automotive type fuses will be utilized to protect electronic equipment. Control relays and solenoid will have a direct current rating of 125 percent of the maximum current for which the circuit is protected per NFPA.

EMI/RFI PROTECTION

To prevent erroneous signals from crosstalk contamination and interference, the electrical system will meet, at a minimum, SAE J551/2, thus reducing undesired electromagnetic and radio frequency emissions. An advanced electrical system will be used to ensure radiated and conducted electromagnetic interference (EMI) or radio frequency interference (RFI) emissions are suppressed at their source.

The apparatus will have the ability to operate in the electromagnetic environment typically found in fire ground operations to ensure clean operations. The electrical system will meet, without exceptions, electromagnetic susceptibility conforming to SAE J1113/25 Region 1, Class C EMR for 10KHz-1GHz to 100 Volts/Meter. The vehicle OEM, upon request, will provide EMC testing reports from testing conducted on an entire apparatus and will certify that the vehicle meets SAE J551/2 and SAE J1113/25 Region 1, Class C EMR for 10KHz-1GHz to 100 Volts/Meter requirements. Component and partial (incomplete) vehicle testing is not adequate as overall vehicle design can impact test results and thus is not acceptable by itself.

EMI/RFI susceptibility will be controlled by applying appropriate circuit designs and shielding. The electrical system will be designed for full compatibility with low-level control signals and high-powered two-way radio communication systems. Harness and cable routing will be given careful attention to minimize the potential for conducting and radiated EMI/RFI susceptibility.

ELECTRICAL HARNESSING INSTALLATION

To ensure rugged dependability, all wiring harnesses installed by the apparatus manufacturer will conform to the following specifications:

SAE J1128 - Low tension primary cable

SAE J1292 - Automobile, truck, truck-tractor, trailer and motor coach wiring

SAE J163 - Low tension wiring and cable terminals and splice clips

SAE J2202 - Heavy duty wiring systems for on-highway trucks

NFPA 1901 - Standard for automotive fire apparatus

FMVSS 302 - Flammability of interior materials for passenger cars, multipurpose passenger vehicles, trucks and buses

SAE J1939 - Serial communications protocol

SAE J2030 - Heavy-duty electrical connector performance standard

SAE J2223 - Connections for on board vehicle electrical wiring harnesses NEC - National Electrical Code



SAE J561 - Electrical terminals - Eyelet and spade type
SAE J928 - Electrical terminals - Pin and receptacle type A

For increased reliability and harness integrity, harnesses will be routed throughout the cab and chassis in a manner which allows the harnessing to be laid into its mounting location. Routing of harnessing which requires pulling of wires through tubes will not be allowed.

Wiring will be run in loom or conduit where exposed, and have grommets or other edge protection where wires pass through metal. Wiring will be color, function and number coded. Wire colors will be integral to each wire insulator and run the entire length of each wire. Harnessing containing multiple wires and uses a single wire color for all wires will not be allowed. Function and number codes will be continuously imprinted on all wiring harness conductors at 3.00" intervals. All wiring installed between the cab and into doors will be protected by an expandable rubber boot to protect the wiring. Exterior exposed wire connectors will be positive locking, and environmentally sealed to withstand elements such as temperature extremes, moisture and automotive fluids.

Electrical wiring and equipment will be installed utilizing the following guidelines:

- All wire ends not placed into connectors will be sealed with a heat shrink end cap. Wires without a terminating connector or sealed end cap will not be allowed.
- All holes made in the roof will be caulked with silicon. Large fender washers, liberally caulked, will be used when fastening equipment to the underside of the cab roof.
- Any electrical component that is installed in an exposed area will be mounted in a manner that will not allow moisture to accumulate in it. Exposed area will be defined as any location outside of the cab or body.
- For low cost of ownership, electrical components designed to be removed for maintenance will be quickly accessible. For ease of use, a coil of wire will be provided behind the appliance to allow them to be pulled away from the mounting area for inspection and service work.
- Corrosion preventative compound will be applied to non-waterproof electrical connectors located outside of the cab or body. All non-waterproof connections will require this compound in the plug to prevent corrosion and for easy separation of the plug.
- Any lights containing non-waterproof sockets in a weather-exposed area will have corrosion preventative compound added to the socket terminal area.
- All electrical terminals in exposed areas will have protective Coating applied completely over the metal portion of the terminal.
- Rubber coated metal clamps will be used to support wire harnessing and battery cables routed along the chassis frame rails.



- Heat shields will be used to protect harnessing in areas where high temperatures exist. Harnessing passing near the engine exhaust will be protected by a heat shield.
- Cab and crew cab harnessing will not be routed through enclosed metal tubing. Dedicated wire routing channels will be used to protect harnessing therefore improving the overall integrity of the vehicle electrical system. The design of the cab will allow for easy routing of additional wiring and easy access to existing wiring.
- All braided wire harnesses will have a permanent label attached for easy identification of the harness part number and fabrication date.
- All standard wiring entering or exiting the cab will be routed through sealed bulkhead connectors to protect against water intrusion into the cab.

BATTERY CABLE INSTALLATION

All 12-volt battery cables and battery cable harnessing installed by the apparatus manufacturer will conform to the following requirements:

SAE J1127 - Battery Cable

SAE J561 - Electrical terminals, eyelets and spade type

SAE J562 - Nonmetallic loom

SAE J836A - Automotive metallurgical joining

SAE J1292 - Automotive truck, truck-tractor, trailer and motor coach wiring

NFPA 1901 - Standard for automotive fire apparatus

Battery cables and battery cable harnessing will be installed utilizing the following guidelines:

- All battery cables and battery harnesses will have a permanent label attached for easy identification of the harness part number.
- Splices will not be allowed on battery cables or battery cable harnesses.
- For ease of identification and simplified use, battery cables will be color coded. All positive battery cables will be red in color or wrapped in red loom the entire length of the cable. All negative battery cables will be black in color.
- For increased reliability and reduced maintenance, all electrical buss bars located on the exterior of the apparatus will be coated to prevent corrosion.



ELECTRICAL COMPONENT INSTALLATION

All lighting used on the apparatus will be, at a minimum, a two (2) wire light grounded through a wired connection to the battery system. Lights using an apparatus metal structure for grounding will not be allowed.

An operational test will be conducted to ensure that any equipment that is permanently attached to the electrical system is properly connected and in working order. The results of the tests will be recorded and provided to the purchaser at time of delivery.

12V POWER POINTS

There shall be one (1) 12v power point and one (1) dual USB power point provided. They shall be mounted in the driver's side of the dash. They shall be within easy reach of the driver; and shall be wired directly to the battery

12V POWER POINTS

There shall be one (1) 12v power point and one (1) dual USB power point provided. They shall be mounted in the officer's side of the dash. They shall be within easy reach of the officer; and shall be wired directly to the battery

DRIVER SWITCH PANEL

The driver panel to the right of the Driver's position shall include the following:

- In the upper most row it shall have the HVAC Controls, which shall include three (3) controls, the fan speed, comfort and defrost control, and temperature control. In the far right position shall be the seat belt indicator.
- In the middle section there shall be eight (8) backlit switches, the switch on the far right side shall be a high idle switch.
- In the bottom row there shall be six (6) switches. The two (2) switches in the far right location shall be the dimmer switch in the second to last switch location and the wiper controls in the last switch location.



MASTER WARNING SWITCH

A master switch shall be included in the main rocker switch panel. The switch shall be a rocker type, red in color and labeled "Master" for identification. The switch shall feature control over all devices wired through it. Any warning device switch left in the "ON" position shall automatically power up when the master switch is activated.

COMMUNICATION ANTENNA BASE

A communications antenna base shall be provided and mounted on the cab roof on the Officer's side.

COMMUNICATION ANTENNA CABLE ROUTING

The cable routing for the communication antenna shall terminate under the Driver seat.

AM/FM/CD RADIO WITH WEATHERBAND

A radio receiver shall be located in the console. The receiver shall handle vibrations, temperature fluctuations, and humidity with ease. The front panel's protective covering shall keep out any dust and debris.

The receiver's AM and FM tuner shall feature presets for radio stations, and the Weather Band tuner shall include automatic NOAA weather for alerts to any severe weather. The receiver shall be SiriusXM ready, PA system ready, and feature a compact disc player. A portable player jack shall be available on the front and rear of the receiver.

The receiver shall be Bluetooth-enabled for phone use and stereo control and be iPod/iPhone ready via a front USB port.

The buttons and LCD display shall feature backlighting for easy reading in all lighting conditions.

SPEAKERS

Four (4) overhead speakers shall be provided in the cab for the radio.



VEHICLE DATA RECORDER

Apparatus shall be equipped with a Class1 “Vehicle Data Recorder (VDR) that is connected to the power train CAN (Controller Area Network) bus consisting of transmission (TCM), engine control (ECM) and anti-lock brake (ABS) modules mounted on the apparatus. The VDR will function per NFPA 1901-2009 sections 4.11 (Vehicle Data Recorder) utilizing the power train s J1939 data.

The VDR data shall be downloadable by USB cable to a computer using either Microsoft [™] or Apple [™] Operating Systems using Class 1/ O.E.M. supplied reporting software. The latest version of the software shall be available by contacting Class 1.

The apparatus shall be equipped with a Class1 Seat Belt Warning System” (SBW) that is connected to the power train CAN (Controller Area Network) bus consisting of transmission (TCM), engine control (ECM) and anti-lock brake (ABS) modules mounted on the apparatus. The SBW will function per NFPA 1901-2009 14.1.3.10 (Seat Belt Warning) using the Class1 “Seat Belt Input Module” for seat occupied and belt status information.

The SBW system shall have the ability to use either normally open (NO) or normally closed (NC) switches (user selectable by “dip switches” at ground potential) for operation.

CAB INSTRUMENTATION

The instrumentation panel within the cab shall feature a Pacific Insight gauge panel which shall include three (3) 5" diameter information centers, telltale indicator lamps, control switches, alarms, and a LCD diagnostic panel.

The gauges shall be easy to read including red backlighting.

The instrument panel shall contain the following gauges and indicators:

The middle information center shall include:

- A programmable speedometer to read either 0 to 140 MPH or 0 to 140 KM/H
- An amber telltale lamp indicating the Check Engine
- An amber telltale lamp indicating MIL Engine Emissions System Malfunction
- A red telltale lamp indicating Stop Engine
- A tachometer gauge with 0-3,000 RPM



The right hand side information center shall include:

- A gauge to display the engine oil pressure with high and low level indicators and stop engine alarm
- A fuel level gauge with a low fuel indicator and alarm
- An LED bar displaying 4 stages of the level for the Diesel Exhaust Fluid (DEF) with a refill indicator
- A voltage gauge with low voltage indicator
- A water temperature gauge with high water temp indicator and alarm

The left hand side information center shall include:

- A primary air PSI gauge including low air and high air warning displays
- A secondary air PSI gauge with low and high air warning indication

An LCD diagnostic display, located in the left hand side information center shall include digital readouts for the following:

- Odometer
- Transmission oil temp
- Engine oil temp
- Speedometer
- Engine hours
- Engine and transmission code
- Exhaust temp
- Engine coolant temp
- Engine oil PSI
- Turbo boost PSI
- Primary air pressure
- Secondary air pressure
- Engine load %
- Engine torque
- Battery volts
- Fuel level %
- Vehicle speed
- RPM
- DEF level
- Instant fuel economy



- Average fuel economy
- Engine hours
- Capable to record three trips, each shall be including:
 - Trip distance
 - Fuel economy
 - Fuel used
 - Idle fuel used
- The LCD screen shall also provide diagnostic capability

To promote safety, the following telltale indicator lamps will be integral to the gauge assembly and are located below the middle information center. The indicator lamps will be "dead-front" design that is only visible when active. The colored indicator lights will have descriptive text or symbols. The following indicator lamps shall be located on the Telltale panel:

- BLUE Indicator Lights
 - High Beam Headlight
- GREEN Indicator Lights
 - Right Turn Indicator
 - Left Turn Indicator
 - Battery On (Always On)
- YELLOW Indicator Lights
 - Particle Filter Regeneration (DPF)
 - Regeneration Inhibit (Switch Engaged)
 - Air Intake Restriction
 - High Exhaust System Temperature (HEST)
 - Wait to Start (when applicable)
 - ATC (Automatic Traction Control) (when applicable)
 - Water in Fuel
- RED Indicator Lights
 - Low Engine Coolant Level
 - Air Bag Warning (when applicable)
 - Check Transmission
 - High Transmission Temperature
 - ABS



- Parking Brake

ALARMS

Audible steady tone warning alarm: A steady audible tone alarm will be provided whenever a warning message is present.

Alarm silence: Any active audible alarm will be able to be silenced with a button on the right side of the LCD screen.

INDICATOR LAMP AND ALARM PROVE-OUT

Telltale indicators and alarms will perform prove-out at initial power-up to ensure proper performance.

DIAGNOSTIC PANEL

A diagnostic panel shall allow diagnostic tools such as computers to connect to various vehicle systems for improved trouble shooting providing a lower cost of ownership. The panel shall be accessible while standing on the ground and located inside the driver's door to the left of the steering column. Diagnostic switches shall allow engine and ABS systems to provide blink codes should a problem exist.

The diagnostic panel shall include:

- Engine diagnostic port
- V-Mux USB diagnostic port (when applicable)
- Engine diagnostic switch (blink codes flashed on check engine telltale indicator)
- Diesel particulate filter regeneration switch (when applicable)
- Diesel particulate filter regeneration inhibit switch (when applicable)

The enclosed diagnostic panel, accessible through the HVAC access panel shall include:

- Transmission diagnostic port
- ABS diagnostic port

SRS diagnostic port (when applicable)



BACKLIGHTING COLOR

The instrumentation gauges and the switch panel legends shall be backlit using red LED backlighting.

BATTERIES

The single start electrical system shall include four (4) 1000 CCA batteries.

The batteries shall feature:

- A 200 minute reserve capacity
- 4/0 dual path starter cables per SAE J541
- Heat shrink and sealant encapsulated ends on the cables
- Maintenance free

BATTERY COMPARTMENTS

A well-ventilated battery storage compartment shall house the batteries on the officer and driver side of the chassis and shall be located so as to offer easy access to the batteries when the cab is tilted.

Each battery compartment shall feature a hot dipped galvanized battery box and cover.

BATTERY CABLES

The starting system shall include cables which shall be protected by a 275 degree F, minimum high temperature flame retardant loom.

The cables shall be in a loom to help keep out dirt, dust and debris.

BATTERY JUMPER STUD

The starting system shall include battery jumper studs.

These studs shall be located in the forward most portion of the driver's side lower step.

The studs shall allow the vehicle to be jump started, charged, or the cab to be raised in an emergency in the event of battery failure.



IGNITION

A master battery system with a keyless start ignition system shall be provided. Each system shall be controlled by a marine grade two position switch, of which shall be mounted on the left side of the steering wheel adjacent to the driver's knee.

A push button type starter button shall be provided on the driver dash to the left of the steering wheel.

The starter button shall only operate when both the master battery and ignition switches are in the "ON" position.

POWER & GROUND STUD

An electrical distribution panel shall include two (2) power studs. The studs shall be a minimum of 1/4" and each of the power studs shall be circuit protected with a fuse of the specified amperage. One (1) power stud shall be capable of carrying up to a 40 amp battery direct load. One (1) power stud shall be capable of carrying up to a 15 amp ignition switched load. The two (2) power studs shall share one (1) 1/4" ground stud.

GROUND LIGHTS

Each door shall include a Whelen 3SC0CDCR LED NFPA compliant ground light mounted to the underside of the cab step below each door.

Each light shall include a polycarbonate lens, a housing which is vibration welded and a bulb which shall be shock mounted for extended life.

GROUND LIGHT ACTIVATION

The ground lights shall activate when the park brake is engaged.

CAB STEP LIGHTING

One (1) LED light shall be mounted to the riser of the middle cab step, a total of eight (8) step lights for the cab, in accordance with NFPA.

Each light shall include a polycarbonate lens and shall be contained in a housing which is vibration welded with a bulb which shall be shock mounted. Each step light shall not be any larger than 3" in diameter.



STEP LIGHT ACTIVATION

The step lighting shall be activated by opening any of the cab doors on the respective side.

INTERIOR DOOR WARNING LIGHTS

The interior of each door shall include one (1) red 3" diameter LED warning light located on the door panel. Each light shall activate with a flashing pattern when the door is in the open position to serve as a warning to oncoming traffic.

ENGINE COMPARTMENT LIGHTING

Two (2) LED lights shall be mounted to the engine compartment in such a fashion as to provide as much light as possible to the engine compartment area. The engine compartment lighting shall activate with the tilting of the cab.

INTERIOR OVERHEAD CAB LED LIGHTING

Each cab door shall include a dual red and white LED lamp. There shall be one (1) light centered over each of the Driver and Officer's seat and one centered over each crew door.

The clear lamp shall illuminate with the opening of each respective door with both the red and clear portions of the lamp activated by individual lighted switches on each lamp.

DO NOT MOVE APPARATUS LIGHT

The front headliner of the cab shall include a flashing red Whelen round LED light with a red lens clearly labeled "Do Not Move Apparatus".

The flashing red light shall be 3.00 inches in diameter and shall be located centered left to right for greatest visibility.

The light shall be interlocked for activation when either a cab door is not firmly closed or an apparatus compartment door is not closed, and the parking brake is released.

BACK-UP ALARM

An ECCO model 575 backup alarm shall be installed at the rear of the chassis with an output level of 107 dB. The alarm shall automatically activate when the transmission is placed in reverse.



REAR & SIDE FACING CAMERA

A rear facing box style rearview camera shall be installed on the rear of the vehicle. There shall also be two (2) teardrop style rearview cameras; one mounted to the Officer side of the vehicle, and one to the Driver side of the vehicle. The rear camera and microphone shall activate when the vehicle transmission is shifted to reverse, and the side tear drop cameras shall be activated with the corresponding blinker. The image viewed on a monitor mounted on the Driver's side dash. The side camera housing shall be chrome in color.

The rear facing camera shall feature stainless steel construction, automatic heating when the temperature is below 10 degrees Fahrenheit, and 150-degree lens. No Exception.

CAMERA MONITOR MOUNT

The drivers monitor for the camera system will be mounted on the dash.

SUPPLEMENTAL AIR BRAKE COMPRESSOR

A 120 volt air compressor shall be installed to maintain the pressure in the braking system connected to shore power. A pressure switch shall sense air pressure loss and engage the compressor, which shall run until adequate pressure is achieved. The unit shall be wired to the 120-volt shore power receptacle specified.

AUX. AIR COMPRESSOR LOCATION

The auxiliary air compressor shall be located behind the officer's seat.

BATTERY CHARGER

{Quantity} Blue Sea model #7522, 40 amp fully automatic high output battery charger shall be wired to the 12 volt battery system. The charger unit shall be mounted in a clean dry area and will be accessible for service and/or maintenance. The charger shall have a Blue Sea EV 7517 indicator attached to the unit.

CHARGER LOCATION

The battery Charger shall be located behind the driver's seat.



EJECTION UNIT

A Blue Sea 7581 Auto Eject 20 amp 120 volt shore power assembly, cover, solenoid input wire, power cord, and plug shall be installed. The 12 volt solenoid shall eject the shore power cord away from vehicle path upon sensing engine start; after ejection, the weatherproof cover snaps into position over inlet. The unit shall sequence energizing of an Auto Eject, eliminating terminal arcing when connecting and disconnecting power cord.

The unit shall have a waterproof back enclosure with watertight cable fittings, which protect mechanism from road contamination.

There shall be a 20-amp Sure Eject auto eject shall have a black cover supplied.

SHORELINE LOCATION

The shoreline shall be located in the driver's side behind the front door above the wheel well.

The Battery Charger indicator shall be located in the canopy window.

1 Gallon of Job Color Paint Supplied with Chassis

SIREN / SPEAKER / WARNING LT PACKAGE

ELECTRIC SIREN AND CONTROL

One (1) Whelen model #295SLSA1 electronic siren shall be mounted in the cab. This unit shall feature an electronic air horn, wail, yelp, hi-lo and shall have a hard wired PA microphone.

SPEAKER

One (1) Federal Signal DynaMax 100-watt speaker, Model #ES100, shall be installed. The speaker shall feature a Neodymium driver and a high strength composite housing that is chemical resistant and maintains rigidity at high temperatures.

SPEAKER

One (1) stainless steel grille shall be installed on the speaker.

SPEAKER LOCATION

The siren speaker shall be installed on the apparatus bumper extension, as determined by the body manufacturer.



LIGHTBAR

One (1) Whelen Ultra Freedom IV light bar shall be included with the apparatus cab. The light bar shall be a model F4N7QLED and shall be mounted on the roof of the cab, towards the front, above the windshield.

The light bar shall feature:

- A 72" light bar designed for high performance
- Two (2) red Linear Super LED corner modules
- Two (2) red 400 series Linear Super LED endcap lights
- Two (2) red 400 series Linear Super LED lights
- Two (2) white 400 series Linear Super LED lights with clear optic lenses
- Clear hard coated lenses to provide extended life/luster protection against UV & chemical stresses
- Designed in accordance with NFPA Zone A requirements

LIGHTBAR ACTIVATION

The front upper light bar shall be activated through the master warning switch.

UPPER REAR WARNING LIGHTS

One (1) pair of Whelen Super LED, rotating beacons, P/N L31H*F, shall be installed, one each side on the upper rear of the apparatus body. The unit shall have dimensions of 4" high x 7-9/16" deep.

The driver side warning light shall be a Whelen LED rotator, model L31HRF with a red lens.

The officer side warning light shall be a Whelen LED rotator, model L31HRF with a red lens.

REAR WARNING LIGHT MOUNTING

The upper rear lights shall be mounted on cast aluminum stanchions attached to the apparatus body, one on each side.



UPPER WING FRONT WARNING LIGHTS

One (1) pair of Whelen model M6 LED warning lights shall be installed, one each side one the front of the chassis cab upper wing area. The dimensions of the lights shall be 4-5/16" x 6-3/4".

The driver side warning light shall be a Whelen Model M6R red Super-LED™ with color lens.

The officer side warning light shall be a Whelen Model M6R red Super-LED™ with color lens.

Each light shall be mounted with a Whelen Model M6FC chrome flange.

INBOARD WARNING LIGHTS

One (1) pair of Whelen model M6 LED warning lights shall be installed, one each side one the front of the chassis cab, in the inboard warning light position. The dimensions of the lights shall be 4-5/16" x 6-3/4".

The driver side warning light shall be a Whelen Model M6R red Super-LED™ with color lens.

The officer side warning light shall be a Whelen Model M6R red Super-LED™ with color lens.

Each light shall be mounted with a Whelen Model M6FC chrome flange.

INTERSECTION WARNING LIGHTS

One (1) pair of Whelen model M6 LED warning lights shall be installed one each side of the chassis cab. The dimensions of the lights shall be 4-5/16" x 6-3/4".

The driver side warning light shall be a Whelen Model M6R red Super-LED™ with color lens.

The officer side warning light shall be a Whelen Model M6R red Super-LED™ with color lens.

Each light shall be mounted with a Whelen Model M6FC chrome flange.



LOWER MID-BODY WARNING LIGHTS

One (1) pair of Whelen model M2 LED warning lights, model M2WR, shall be installed, one each side of the apparatus, mid-body in the rub rail. The dimensions of the lights shall be 4-1/4" x 2-11/16".

The driver side warning light shall be a Whelen Model M2WR wide-angle red Super-LED™ with color lens.

The officer side warning light shall be a Whelen Model M2WR wide-angle red Super-LED™ with color lens.

LOWER REAR SIDE WARNING LIGHTS

One (1) pair of Whelen model M2 LED warning lights shall be installed, one each side of the apparatus, towards the rear of the body, in the rub rail. The dimensions of the lights shall be 4-1/4" x 2-11/16".

The driver side warning light shall be a Whelen Model M2WR wide-angle red Super-LED™ with color lens.

The officer side warning light shall be a Whelen Model M2WR wide-angle red Super-LED™ with color lens.

LOWER REAR WARNING LIGHTS

One (1) pair of Whelen model M6 LED warning lights shall be installed, one each side on the lower rear of the apparatus body. The dimensions of the lights shall be 4-5/16" x 6-3/4".

The driver side warning light shall be a Whelen Model M6R red Super-LED™ with color lens.

The officer side warning light shall be a Whelen Model M6R red Super-LED™ with color lens.



12-VOLT ELECTRICAL SYSTEM

LOW VOLTAGE ELECTRICAL SYSTEM SPECIFICATIONS

The electrical system shall include all panels, electrical components, switches and relays, wiring harnesses and other electrical components. The electrical equipment installed by the apparatus manufacturer shall conform to current automotive electrical system standards, the latest Federal DOT standards, and the requirements of the applicable NFPA standards.

All wiring shall be stranded copper or copper alloy conductors of a gauge rated to carry 125 percent of the maximum current for the protected circuit. Voltage drops in all wiring from the power source to the using device shall not exceed 10 percent. The wiring and wiring harness and insulation shall be in conformance to applicable SAE and NFPA standards. The wiring harness shall conform to SAE J-1128 with GXL temperature properties. All exposed wiring shall be protected in a loom with a minimum 289 degree Fahrenheit rating. All wiring looms shall be properly supported and attached to body members. The electrical conductors shall be constructed in accordance with applicable SAE standards, except when good engineering practice requires special construction.

The wiring connections and terminations shall use a method that provides a positive mechanical and electrical connection and shall be installed in accordance with the device manufacturer's instructions. Electrical connections shall be with mechanical type fasteners and large rubber grommets where wiring passes through metal panels.

The wiring between the cab and body shall be joined using Deutsche type connectors or an enclosed in a terminal junction panel area. This system will permit body removal with minimal impact on the apparatus electrical system. All connections shall be crimp-type with insulated shanks to resist moisture and foreign debris such as grease and road grime. Weather-resistant connectors shall be provided throughout to ensure the integrity of the electrical system.

Any electrical junction or terminal boxes shall be weather resistant and located away from water spray conditions. In addition, the main body junction panel shall house the automatic reset breakers and relays where required.

There shall be no exposed electrical cabling, harnesses, or terminal connections located in compartments, unless they are enclosed in a junction box or covered with a removable electrical panel. The wiring shall be secured in place and protected against heat, liquid contaminants and damage. Wiring shall be uniquely identified every three-inches (3") by color coding or permanent marking with a circuit function code and identified on a reference chart or electrical wiring schematic per requirements of applicable NFPA #1901 standards.



The electrical circuits shall be provided with low voltage overcurrent protective devices. Such devices shall be accessible and located in required terminal connection locations or weather resistant enclosures. The overcurrent protection shall be suitable for electrical equipment and shall be automatic reset type and meet SAE standards. All electrical equipment, switches, relays, terminals, and connectors shall have a direct current rating of 125 percent of maximum current for which the circuit is protected. The system shall have electro-magnetic interference suppression provided as required in applicable SAE standards.

The electrical system shall include the following:

- Electrical terminals in weather exposed areas shall have a non-conductive grease or spray applied. A corrosion preventative compound shall be applicable to all terminal plugs located outside of the cab or body.
- The electrical wiring shall be harnessed or be placed in a protective loom.
- Holes made in the roof shall be caulked with silicone. Large fender washers shall be used when fastening equipment to the underside of the cab roof.
- Any electrical component that is installed in an exposed area shall be mounted in a manner that will not allow moisture to accumulate in it.
- A coil of wire must be provided behind an electrical appliance to allow them to be pulled away from mounting area for inspection and service work.
- All lights that have their sockets in a weather exposed area shall have corrosion preventative compound added to the socket terminal area.

The warning lights shall be switched in the chassis cab with labeled switches in an accessible location. Individual rocker switches shall be provided only for warning lights provided over the minimum level of warning lights in either the stationary or moving modes. All electrical equipment switches shall be mounted on a switch panel mounted in the cab convenient to the operator. The warning light switches shall be of the rocker type. For easy nighttime operation, an integral indicator light shall be provided to indicate when the circuit is energized. All switches shall be appropriately identified as to their function.

A single warning light switch shall activate all required warning lights. This switch will allow the vehicle to respond to an emergency and "call for the right of way". When the parking brake is applied, a "blocking right of way" system shall automatically activate per requirements of the applicable NFPA standards. All "clear" warning lights shall be automatically turned off upon application of the parking brake.



NFPA REQUIRED TESTING OF ELECTRICAL SYSTEM

The apparatus shall be electrically tested upon completion of the vehicle and prior to delivery. The electrical testing, certifications, and test results shall be submitted with delivery documentation per requirements of the applicable NFPA standards. The following minimum testing shall be completed by the apparatus manufacturer:

1. Reserve capacity test:

The engine shall be started and kept running until the engine and engine compartment temperatures are stabilized at normal operating temperatures and the battery system is fully charged. The engine shall be shut off and the minimum continuous electrical load shall be activated for ten (10) minutes. All electrical loads shall be turned off prior to attempting to restart the engine. The battery system shall then be capable of restarting the engine. Failure to restart the engine shall be considered a failed test.

2. Alternator performance test at idle:

The minimum continuous electrical load shall be activated with the engine running at idle speed. The engine temperature shall be stabilized at normal operating temperature. The battery system shall be tested to detect the presence of battery discharge current. The detection of battery discharge current shall be considered a test failure.

3. Alternator performance test at full load:

The total continuous electrical load shall be activated with the engine running up to the engine manufacturer's governed speed. The test duration shall be a minimum of two (2) hours. Activation of the load management system is permitted during this test. However, if an alarm sounds due to excessive battery discharge, as detected by the system requirements in the NFPA standards, or a system voltage of less than 11.7 volts dc for more than 120 seconds is present, the test has failed.

4. Low voltage alarm test:

Following the completion of the above tests, the engine shall be shut off. The total continuous electrical load shall be activated and shall continue to be applied until the excessive battery discharge alarm activates. The battery voltage shall be measured at the battery terminals. With the load still applied, a reading of less than 11.7 volts dc for a 12 volt system shall be considered a test failure. The battery system shall then be able to restart the engine. Failure to restart the engine shall be considered a test failure.



NFPA REQUIRED DOCUMENTATION

The following documentation shall be provided on delivery of the apparatus:

- a. Documentation of the electrical system performance tests required above.
- b. A written load analysis, including:
 1. The nameplate rating of the alternator.
 2. The alternator rating under the conditions.
 3. Each specified component load.
 4. Individual intermittent loads.

RESCUE MODE

A momentary rocker switch shall be installed to auto deploy the rear compartment electric slide tray and the officers side clean bunker storage module when park brake is applied. The switch shall be conveniently located for ease of operation and labeled appropriately. This switch will need to be activated prior to allow the auto deploy feature to function.

SWITCH TO BE LABELED:

"RESCUE MODE"

WEATHER RESISTANT ELECTRICAL JUNCTION BOX

The electrical junction or terminal boxes shall be weather resistant and located away from water spray conditions. In addition, the main body junction panel shall house the automatic reset breakers and relays where required. The main body junction panel shall be located in the pump compartment.

AUTO DEPLOY FEATURE

The auto deploy feature on this truck will be controlled with a momentary rocker switch on the cab console.

The momentary rocker switch activates the auto deploy for the rear compartment electric slide tray and the officer's side clean bunker storage module when park brake is applied. The switch shall be conveniently located for ease of operation and labeled appropriately. This switch will need to be activated prior to allow the auto deploy feature to function.



PTO SWITCH

A **PTO** switch with indicator shall be installed on the cab dash and at the **pump panel** to control the **PTO**. The switches shall be wired to operate in a three-way configuration to allow the **PTO** to be controlled from either location regardless of switch position. The switches shall be labeled "PTO".

DASH MOUNTED EMERGENCY ELECTRICAL SWITCH PANEL

An electrical switch panel shall be designed and mounted in the cab dash area. All switches shall be provided with backlighted snap-in legend inserts.

SWITCHES

All emergency light switches shall be lighted, rocker style. Switches shall be internally lit when the switch circuit is in the on position. A plug-in identification label is to be provided and installed adjacent to each rocker switch with backlighting provided behind the label.

An internally lighted "master" switch shall be provided and wired through a heavy-duty relay to activate power to the emergency lights.

AIR HORNS

Two (2) 24.5" Stuttertone chrome plated air horns shall be recess mounted into the front bumper with one positioned on each side. An air protection valve shall be provided in the air horn piping that will not allow the chassis air brake system to drop below 90 PSI.

ELECTRIC TRAFFIC HORN AND AIR HORN SELECTOR SWITCH

One (1) selector switch shall be provided on the cab's dash that will allow the chassis steering wheel horn button to activate either the electric traffic horn or air horn system.

AIR HORN FOOT SWITCH

One (1) foot switch shall be installed to activate the air horn system on the officer's side of the floor.

PUMP ENCLOSURE LIGHTS

One (1) LED work light shall be provided in the pump enclosure.

The control switch shall be mounted on the light head.



HANDLIGHT

One (1) Streamlight Survivor® LED orange personal right-angle flashlight (P/N 90509) shall be installed. The flashlight shall include a mounting bracket, with fast charge 12 volt charger wired to the apparatus battery system to allow the light to recharge when not in use.

HANDLIGHT

One (1) Streamlight Survivor® LED yellow personal right-angle flashlight (P/N 90519) shall be installed. The flashlight shall include a mounting bracket, with fast charge 12 volt charger wired to the apparatus battery system to allow the light to recharge when not in use.

HANDLIGHT INSTALLATION

The location of the handlight installation shall be in the apparatus body. All components shall be installed as directed by the fire department.

MARKER LIGHTS

LED marker lights shall be installed on the vehicle in conformance to the Department of Transportation requirements.

LICENSE PLATE BRACKET

One (1) stainless steel license plate bracket shall be provided at the rear of the apparatus. The bracket shall have a LED light.

TAIL LIGHTS

One (1) pair of Whelen M6 LED tail/brake lights shall be provided. The rectangular 4"x6" lights shall be red.

TURN SIGNALS

One (1) pair of Whelen M6 LED turn signals with populated sequential chevron arrow shall be provided.

BACKUP LIGHTS

One (1) pair of Whelen Series M6 LED backup lights shall be installed on the rear of the apparatus body. The dimensions shall be 4" x 6" and the lens color shall be clear.



FOUR LIGHT HOUSING

One (1) pair of chrome plated tail light housings shall be supplied. Each housing shall be designed to hold four (4) Whelen M6 rear lights located at the lower rear corners of the body.

PUMP PANEL GROUND LIGHTS

Two (2) LED ground lights shall be installed under the pump panel running boards. One (1) light shall be located on the driver's side and one (1) light located on the officer's side of the apparatus.

REAR STEP GROUND LIGHTS

Two (2) LED ground lights shall be installed under rear step of the apparatus.

The ground lights shall automatically activate when the parking brake is applied.

REAR TAILBOARD LIGHTS

Two (2) LED step lights with clear lens shall be installed to illuminate the step surfaces at the rear of the apparatus body.

The step/walkway light switch shall be installed and wired to the parking brake.

DECK LIGHTS - REAR

The deck lights shall be installed at the rear of the hose bed.

One (1) Unity Model #AG spotlight and one (1) Unity Model #AG floodlight, with 35 watt bulbs shall be installed. The lights shall have an "on-off" switch.



CHASSIS MODIFICATION

FLUID DATA PLAQUE

One (1) fluid data plaque containing required information shall be provided based on the applicable components for this apparatus, compliant with NFPA Standards:

- Engine oil
- Engine coolant
- Chassis transmission fluid
- Drive axle lubricant
- Power steering fluid
- Pump transmission lubrication fluid
- Other NFPA applicable fluid levels or data as required

Location shall be in the driver's compartment or on driver's door.

DATA & WARNING LABELS

HEIGHT LENGTH & WEIGHT

A highly visible label indicating the overall height, length, and weight of the vehicle shall be installed in the cab dash area.

NO RIDE LABEL

One (1) "NO RIDERS" label shall be applied on the vehicle at the rear step area or other applicable areas. The label shall warn personnel that riding in or on these areas, while the vehicle is in motion is prohibited.

CAB SEATING POSITION LIMITS

One (1) label shall be installed in the cab to indicate seating positions for firefighters. A weight allowance of 250 pounds for each shall be factored into the gross vehicle weight rating of the chassis.

HELMET WARNING TAG

One (1) label shall be installed in the cab, visible from each seating position. The label shall read "CAUTION: DO NOT WEAR HELMET WHILE SEATED." Helmets must be properly stowed while the vehicle is in motion according to the current edition of NFPA 1901.



REAR TOWING PROVISIONS

There shall be two tow eyes furnished under the rear of the body and attached directly to the chassis frame rails. There shall be a reinforcement spreader bar connecting the two tow eyes. Tow eyes are to be constructed of 3/8" plate steel with a 4" I.D. hole, large enough for passing through a tow chain end hook.

The tow plates shall be painted black.

BUMPER

The chassis shall feature a heavy duty bumper constructed from ASTM A36, 1/4" thick steel and painted primary job color. The bumper shall be 12" high by 102" wide with two inch (2") flanges and chamfered corners.

Integral heavy duty steel bumper "wings" shall extend from the bumper to the cab.

The bumper shall be mounted to an eighteen inch (18") long chassis frame extension.

A contoured apron / gravel shield fabricated from NFPA compliant, slip-resistant polished aluminum shall enclose the area between the bumper and the cab.

HUB AND LUG NUT COVERS

The apparatus shall have chrome or stainless steel hub and lug nut covers on the front and single rear axles.

STAINLESS STEEL WHEEL COVERS

The front and rear outer wheels of the single rear axle apparatus shall have Real Wheels, mirror finish stainless steel full wheel covers complete with stainless steel hub and lug nut covers. The rear wheels shall be furnished with braided stainless steel air valve extensions.

TIRE PRESSURE INDICATOR, p/n RWTG1235

There shall be a tire pressure indicator, p/n RWTG1235, at each tire's valve stem on the vehicle that shall indicate if there is insufficient pressure in the specific tire.

REAR MUD FLAPS

One (1) pair of black mud flaps shall be installed behind the rear wheels.



4-DOOR CAB INTERIOR DOOR PROTECTION PANELS

Scuff plates for the lower inside portion of each interior cab door shall be installed, fabricated from aluminum tread plate.

ROSENBAUER N55 SINGLE STAGE PUMP

ROSENBAUER N FIRE PUMP

A Rosenbauer Model N fire pump shall be mounted and installed. The midship pump system shall have a rated capacity of 1500 GPM and shall meet all applicable sections of NFPA standards. The pump shall be constructed and mounted in accordance with the following specifications.

Pump shall deliver the percentage of rated discharge at pressures indicated below:

- 100% of rated capacity at 150 pounds net pressure
- 70% of rated capacity at 200 pounds net pressure
- 50% of rated capacity at 250 pounds net pressure
- 100% of rated capacity at 165 pounds net pressure

IMPELLER AND SHAFT

The high-grade light alloy impellers shall be accurately balanced and mounted on a stainless steel pump shaft. The shaft shall be supported by three roller bearings; two located in the gearbox and one in the suction inlet. Bearings shall be protected from water and sediment by maintenance free self-adjusting mechanical seals.

PUMP DRIVE SYSTEM

Fire pump shall incorporate high strength helical gear drive single stage transmission. Pump drive system shall be with a heavy-duty PTO system bolted directly to the chassis transmission. There shall be a heavy-duty drive shaft furnished from the PTO to the midship pump transmission.

Pump Body Material

The pump body is to be of high quality seawater resistant stainless duplex steel. Heavy cast iron pumps are not acceptable.



PRIMER – AUTOMATIC

An automatic fire pump priming system shall be provided and installed. The system shall be oil-less type and environmentally safe. Once engaged, the system shall be fully automatic and not require any action from the pump operator/engineer when pump draft is lost. This feature provides an additional safety margin by maintaining pump flow from the available water source automatically during drafting operations. When air is introduced during a drafting operation from conditions such as whirlpools or turbulence from porta-tank refill operations, the priming system shall automatically engage to remove the air and stabilize water flow and pump pressure. For additional safety, the entire system shall operate at less than 70dBA of ambient noise.

The priming system shall engage automatically whenever the pump discharge falls below five (5) psi and shall remain engaged until a pump prime has been achieved. The priming system shall automatically disengage when a positive pump discharge pressure has been established. The electrical current draw from the chassis batteries shall not exceed four (4) amps at any given time of operation and allow for unlimited run time without causing an overheat condition for of any of the system components.

A single engagement switch shall be provided on the pump control panel that will allow the operator to engage the automatic pump priming system. There shall be a light provided on the pump control panel to indicate when the system is engaged. The pump shall be capable of taking suction and discharging water with a lift of 10 feet in not more than 30 seconds with the pump dry, through 20 feet of suction hose of appropriate size. The priming system shall comply with applicable sections of NFPA standards.

PRIMER CONTROL

A rocker switch control shall be provided on the pump operator's panel, for the main pump primer control.



PRESSURE GOVERNOR AND ENGINE-PUMP MONITORING

One (1) Fire Research InControl series TGA300 pressure governor and monitoring display kit shall be installed. The kit shall include a control module, intake pressure sensor, discharge pressure sensor, and cables. The control module case shall be waterproof and have dimensions not to exceed 5 1/2" high by 10 1/2" wide by 2" deep. Inputs for monitored information shall be from a J1939 databus or independent sensors. Outputs for engine control shall be on the J1939 databus or engine specific wiring.

The following continuous displays shall be provided:

- Pump discharge; shown with four daylight bright LED digits more than 1/2" high
- Pump Intake; shown with four daylight bright LED digits more than 1/2" high
- Pressure / RPM setting; shown on a dot matrix message display
- Pressure and RPM operating mode LEDs
- Throttle ready LED
- Engine RPM; shown with four daylight bright LED digits more than 1/2" high
- Check engine and stop engine warning LEDs
- Oil pressure; shown on a dual color (green/red) LED bar graph display
- Engine coolant temperature; shown on a dual color (green/red) LED bar graph display
- Transmission Temperature: shown on a dual color (green/red) LED bar graph display
- Battery voltage; shown on a dual color (green/red) LED bar graph display.

The dot-matrix message display shall show diagnostic and warning messages as they occur. It shall show monitored apparatus information, stored data, and program options when selected by the operator. All LED intensity shall be automatically adjusted for day and night time operation.

The program shall store the accumulated operating hours for the pump and engine to be displayed with the push of a button. It shall monitor inputs and support audible and visual warning alarms for the following conditions:

- High Battery Voltage
- Low Battery Voltage (Engine Off)
- Low Battery Voltage (Engine Running)
- High Transmission Temperature
- Low Engine Oil Pressure
- High Engine Coolant Temperature
- Out of Water (visual alarm only)
- No Engine Response (visual alarm only).

The program features shall be accessed via push buttons located on the front of the control panel. There shall be an USB port located at the rear of the control module to upload future firmware enhancements.



Inputs to the control panel from the pump discharge and intake pressure sensors shall be electrical. The discharge pressure display shall show pressures from 0 to 600 psi. The intake pressure display shall show pressures from -30 in. Hg to 600 psi.

The governor shall operate in two control modes, pressure and RPM. No discharge pressure or engine RPM variation shall occur when switching between modes. A throttle ready LED shall light when the interlock signal is recognized. The governor shall start in pressure mode and set the engine RPM to idle. In pressure mode the governor shall automatically regulate the discharge pressure at the level set by the operator. In RPM mode the governor shall maintain the engine RPM at the level set by the operator except in the event of a discharge pressure increase. The governor shall limit a discharge pressure increase in RPM mode to a maximum of 30 psi. Other safety features shall include recognition of no water conditions with an automatic programmed response and a push button to return the engine to idle.

The pressure governor, monitoring and master pressure display shall be programmed to interface with a specific engine.

PTO PUMP SHIFT SPECIFICATIONS -- PUMP AND ROLL

An electric powered PTO pump shift shall be installed in the cab driver's area where not subject to accidental engagement.

An electric powered locking rocker switch for PTO pump engagement shall be installed in the cab driver's area. The pump shift system shall permit "pump and roll" operations, as well as stationary pumping operations.

The following indicator lights shall be included with pump shift.

1. A green indicator light, labeled "PUMP ENGAGED" shall indicate pump PTO has successfully been engaged.
2. A green indicator light, labeled "OK TO PUMP" shall indicate the PTO is engaged and parking brake is activated. Pump control is through the pressure governor.
3. A red indicator light, labeled "PUMP & ROLL" shall indicate the PTO is engaged and parking brake is released. Pump control is through the driver's throttle pedal.
4. Pump shift and interlocks shall comply with applicable sections of the NFPA standards.
5. An instruction label and nameplate shall be provided to indicate proper pump engagement instructions.



PUMP ANODES

There shall be sacrificial, zinc anodes in the pump steamer ports which shall protect the pump and piping from electrolysis. These anodes shall also act as screens.

STAINLESS STEEL PUMP PLUMBING

PUMP PLUMBING SYSTEM

The fire pump plumbing system shall be of rigid stainless steel pipe or flexible piping with stainless steel fittings. Mechanical grooved couplings shall be installed to permit flexing of the plumbing system and allow for quick removal of piping or valves for service. Flexible hose couplings shall be threaded stainless steel or mechanical grooved coupling connections.

The fire pump and plumbing shall be hydrostatically tested in compliance to applicable sections of NFPA standards. The test results shall be included in the delivery documentation.

FIRE PUMP MASTER DRAIN

The fire pump plumbing system and fire pump shall be piped to a single push-pull type master pump drain assembly.

ADDITIONAL LOW POINT DRAINS

The plumbing system shall be equipped with additional low point manually operated drain valves to allow total draining of the fire pump plumbing system. These valves shall be accessible from the side of the vehicle and labeled.

STAINLESS STEEL INTAKE MANIFOLD

The suction manifold assembly shall be fabricated with Schedule #10 type 304 stainless steel. All threaded fittings shall be a minimum of Schedule 10 stainless steel. The suction manifold assembly shall have radiused sweep elbows to minimize water turbulence into the suction volute. The suction manifold shall be welded and pressure tested prior to installation. The stainless steel manifold assembly shall be attached to the pump intake volute with a heavy-duty, flexible Victaulic coupling.

The stainless steel manifold assembly shall have a ten (10) year warranty.



STAINLESS STEEL DISCHARGE MANIFOLD

The discharge manifold assembly shall be fabricated with minimum of Schedule #10 Type 304 stainless steel. All threaded fittings shall be a minimum of Schedule #40 stainless steel. The discharge manifold assembly shall have radiused sweep elbows to minimize water turbulence. The manifold shall be welded and pressure tested prior to installation. The stainless steel manifold inlet shall be attached to the pump discharge and have additional brackets as required to support the discharge manifold, valves and related components.

The stainless steel manifold assembly shall have a ten (10) year warranty.

FIRE PUMP & PLUMBING SYSTEM PAINTING

The fire pump and plumbing system shall be painted by the fire apparatus manufacturer. The fire pump and the plumbing shall be painted metallic silver.

HOSE THREADS

The hose threads shall be National Standard Thread (NST) on all base threads on the apparatus intakes and discharges.

LEFT SIDE -- 6" UNGATED INTAKE

One (1) 6" ungated suction intake shall be installed on the left side pump panel to supply the fire pump from an external water supply. The threads shall be 6" NST. The intake shall be provided with a removable screen.

One (1) 6" chrome plated cap shall be provided. The threads shall be NST and the cap shall be equipped long handles.

RIGHT SIDE -- 6" UNGATED INTAKE

One (1) 6" ungated suction intake shall be installed on the right side pump panel to supply the fire pump from an external water supply. The intake shall be provided with a removable screen.

One (1) 6" chrome plated cap shall be provided. The threads shall be NST and the cap shall be equipped long handles.



WATER TANK TO PUMP LINE

One (1) 3" water tank to the rear mounted fire pump line shall be provided with a full flow quarter turn ball valve, 4" piping, and with flex hose and stainless steel hose clamps. The tank to pump line shall be equipped with a check valve to prevent pressurization of the water tank.

The line shall be flow tested during the fire pump testing and shall meet applicable requirements of NFPA standards.

The tank to pump valve shall be controlled at the pump operator's panel.

The valve shall be an Elkhart three-inch (3") swing-out ball valve. The valve shall have an all brass body with flow optimizing stainless steel ball and dual polymer seats. The valves shall be capable of bi-directional flow and incorporating a self-locking ball. The valve shall not require lubrication of seats or any other internal waterway parts, and be capable of swinging out of the waterway for maintenance.

The valve control shall be a manually operated pull-rod with aircraft cable control. The lever shall be locking with a polished finish. The lever shall have a 6" stroke for ease of operation.

The aircraft cable used to control the valve from the lever shall be furnished with 7/8" bulkhead and 5/16" thread on both ends. The cable end nearest the valve will have a 5/16" swivel u-joint. This cable allows for ease of maintenance and operation.

The control shall be properly identified with a color-coded name plate.

FIRE PUMP TO WATER TANK FILL LINE

One (1) 2" fire pump to water tank refill and pump bypass cooler line shall be provided. The valve shall be a full flow quarter turn ball valve with 2" piping and flex hose to tank. The valve control handle shall have a nameplate located near the valve control.

The valve shall be an Elkhart two-inch (2") swing-out ball valve. The valve shall have an all brass body with flow optimizing stainless steel ball and dual polymer seats. The valves shall be capable of bi-directional flow and incorporating a self-locking ball. The valve shall not require lubrication of seats or any other internal waterway parts, and be capable of swinging out of the waterway for maintenance.

The valve control shall be a manually operated pull-rod with aircraft cable control. The lever shall be locking with a polished finish. The lever shall have a 6" stroke for ease of operation.

The aircraft cable used to control the valve from the lever shall be furnished with 7/8" bulkhead and 5/16" thread on both ends. The cable end nearest the valve will have a 5/16" swivel u-joint. This cable allows for ease of maintenance and operation.

The control shall be properly identified with a color-coded name plate.



MIDSHIP FIRE PUMP DRIVESHAFTS AND INSTALLATION

The midship PTO fire pump shall be installed and shall include installation of the fire pump, modification and/or fabrication of new drivelines and all pump-mounting brackets. The PTO drive shaft(s) shall be spin balanced prior to final installation.

INTAKE RELIEF/DUMP VALVE

One (1) TFT A18 series, 2-1/2" intake relief/dump valve preset at 125 psi shall be permanently installed on the suction side of the fire pump. The valve shall have an adjustment range of 75 psi to 250 psi, and shall be designed to automatically self-restore to a non-relieving position when excessive pressure is no longer present.

Discharge side of the intake relief valve shall be plumbed away from the pump operator.

FIRE PUMP COOLING

The fire pump shall be equipped with 3/8" cooling line from the pump to the water tank. This re-circulation line shall be controlled by a pump panel control valve with nameplate label noting it as the "fire pump bypass cooler". There shall be a check valve installed in the pump cooler line to prevent tank water from back flowing into the pump when it is not in use.

CHASSIS ENGINE HEAT EXCHANGER COOLING SYSTEM

The apparatus shall be equipped with a heat exchanger for supplementary chassis engine cooling during fire pump operations. A manually opened valve, mounted at the operator's panel, shall direct water from the fire pump to the heat exchanger that is mounted in the engine radiator cooling hose. The system shall provide cooling water from the fire pump to circulate around the engine radiator coolant without mixing or coming in direct contact with the engine coolant. The complete installation shall be done by the fire apparatus manufacturer.

A nameplate label shall be installed on the pump panel noting "engine cooling system" with "on-off" opening directions noted.

UNDERWRITERS LABORATORIES FIRE PUMP TEST

The pump shall undergo an Underwriters Laboratories Incorporated test per applicable sections of NFPA standards, prior to delivery of the completed apparatus.

The UL acceptance certificate shall be furnished with the apparatus on delivery.



FIRE PUMP TEST LABEL

A fire pump performance and rating label shall be installed on the fire apparatus pump panel. The label shall denote levels of pump performance and testing completed at factory. These shall include GPM at net pump pressure, RPM at such level, and other pertinent data as required by applicable NFPA standards. In addition, the pressure control device, tank to pump flow tests, and other required testing shall be completed.

In addition, the entire pump, suction and discharge passages shall be hydrostatically tested to a pressure as required by applicable NFPA standards. The pump shall be fully tested at the pump manufacturer's factory to the performance specifications as outlined by applicable NFPA standards. Pump shall be free from objectionable pulsation and vibration.

If applicable, the fire pump shall be tested and rated as follows:

- 100% of rated capacity at 150 pounds net pressure.
- 70% of rated capacity at 200 pounds net pressure.
- 50% of rated capacity at 250 pounds net pressure.
- 100% or rated capacity at 165 pounds net pressure.

LEFT SIDE -- 2-1/2" GATED INTAKE

One (1) 2-1/2" gated suction intake shall be installed on left side pump panel to supply the fire pump from an external water supply. The control valve shall be a quarter turn ball valve and shall have 2-1/2" NST female thread of chrome plated brass.

The intake shall be equipped with a 3/4" drain and bleeder valve. A nameplate label and removable screen shall be installed.

An Innovative Controls 3/4" cast bronze quarter-turn drain/bleeder valve shall be installed. The valve shall be complete with a chrome plated bronze ball, reinforced teflon seals, and blow-out proof stem rated to 600 PSI. A chrome plated zinc handle shall be provided on each drain valve complete with a recessed ID label provision. The handle shall lift to open and push down to close.

One (1) 2-1/2" chrome plated plug shall be provided. The threads shall be NST and the plug shall be equipped rocker lugs and chain or cable securement.

The valve shall be an Elkhart two and one half-inch (2-1/2") swing-out ball valve. The valve shall have an all brass body with flow optimizing stainless steel ball and dual polymer seats. The valves shall be capable of bi-directional flow and incorporating a self-locking ball. The valve shall not require lubrication of seats or any other internal waterway parts, and be capable of swinging out of the waterway for maintenance.



The valve shall be equipped with one (1) manually operated, swing-type manual control located adjacent the intake. The control handle shall be equipped with self-locking feature. The valve shall be equipped with a color-coded name plate.

DISCHARGES

TWO (2) 1-1/2" CROSSLAY DISCHARGES

Two (2) pre-connect 1-3/4" hose crosslays shall be installed over pump enclosure, with quarter turn 2" diameter ball valves. The outlets shall be a 2" NPT female swivel x 1-1/2" male NST hose threads.

The crosslay hosebeds shall have smooth aluminum sides. The hosebed decking shall be constructed with slots integrated into the hosebed floor.

Each hosebed shall provide for a minimum capacity of 200 feet of 1-3/4" diameter double jacket hose with nozzle, for hose provided by the fire department. A divider shall be installed to separate the crosslay beds.

An Innovative Controls 3/4" cast bronze quarter-turn drain/bleeder valve shall be installed. The valve shall be complete with a chrome plated bronze ball, reinforced teflon seals, and blow-out proof stem rated to 600 PSI. A chrome plated zinc handle shall be provided on each drain valve complete with a recessed ID label provision. The handle shall lift to open and push down to close.

The specified valve shall be an Elkhart two-inch (2") swing-out ball valve. The valve shall have an all brass body with flow optimizing stainless steel ball and dual polymer seats. The valves shall be capable of bi-directional flow and incorporating a self-locking ball. The valve shall not require lubrication of seats or any other internal waterway parts, and be capable of swinging out of the waterway for maintenance.

For valve actuation, the specified discharge shall be equipped with a side mount valve control, with air craft cable control. The ergonomically designed 1/4 turn push-pull T-handle shall be chrome plated zinc with recessed labels for color coding and signage. The gear-control rod, double laminated locking clips, and rod housing shall be stainless steel and provide true positive lock that will eliminate valve drift. Bronze and Teflon impregnated stainless steel bushings in both ends of rod housing shall eliminate rod deflection, never need lubrication and ensure consistent long-term operation.

The aircraft cable that is used to control the valve, shall be furnished with 7/8" bulkhead both ends, 5/16" threaded ends and will also require a 5/16" swivel u-joint that unhooks from the ball valve. This cable will be used for ease of maintenance and operation.



The control assembly shall include a decorative chrome-plated zinc panel mounted gauge bezel with recessed color-coded label.

Two (2) 2-1/2" IC discharge pressure gauges (0-400 PSI) shall be provided. The face of the gauge shall be a WHITE dial with black letters. The gauges will be located on the pump instrument panel.

CROSSLAY HINGED COVER WITH END FLAPS

The crosslay hosebed shall be equipped with a single aluminum diamond plate hinged cover with vinyl end flaps with hook & loop fasteners. The cover shall have rubber bumpers, latching devices, and lift up handle on each end of the cover.

The hosebed cover shall be labeled, "Not a Standing or Walking Surface", per NFPA.

ROLLERS FOR CROSSLAY HOSE BED

The crosslay hosebed shall be equipped stainless steel "U" shaped roller system, one on each end of the hosebed.

The vinyl cover shall be red in color.

CROSSLAY HOSE BED TRIM

The crosslay hosebed shall be equipped anodized aluminum angle overlays, one on each end of the hosebed.

CROSSLAY HOSEBEDS

Crosslay hosebed(s) shall be mounted over the upper pump panel or gauge panel in the upper portion of the pump enclosure. The crosslay hosebed shall be approximately 12" from the top of the pump enclosure.



LEFT SIDE PUMP PANEL -- 2-1/2" DISCHARGE

Two (2) 2-1/2" discharge shall be installed on the left side pump panel area and shall be controlled by a quarter turn ball valve. The discharge shall have 2-1/2" NST male hose threads. A color coded nameplate label shall be provided adjacent the control handle.

An Innovative Controls 3/4" cast bronze quarter-turn drain/bleeder valve shall be installed. The valve shall be complete with a chrome plated bronze ball, reinforced teflon seals, and blow-out proof stem rated to 600 PSI. A chrome plated zinc handle shall be provided on each drain valve complete with a recessed ID label provision. The handle shall lift to open and push down to close.

Two (2) chrome plated elbow with rocker lugs shall be provided with 2-1/2" NST swivel female x 2-1/2" NST male hose threads.

Two (2) 2-1/2" NST rocker lug chrome plated vented cap and cable or chain securement shall be provided.

The specified valve shall be an Elkhart two and one half-inch (2-1/2") swing-out ball valve. The valve shall have an all brass body with flow optimizing stainless steel ball and dual polymer seats. The valves shall be capable of bi-directional flow and incorporating a self-locking ball. The valve shall not require lubrication of seats or any other internal waterway parts, and be capable of swinging out of the waterway for maintenance.

For valve actuation, the specified discharge shall be equipped with a side mount valve control, with air craft cable control. The ergonomically designed 1/4 turn push-pull T-handle shall be chrome plated zinc with recessed labels for color coding and signage. The gear-control rod, double laminated locking clips, and rod housing shall be stainless steel and provide true positive lock that will eliminate valve drift. Bronze and Teflon impregnated stainless steel bushings in both ends of rod housing shall eliminate rod deflection, never need lubrication and ensure consistent long-term operation.

The aircraft cable that is used to control the valve, shall be furnished with 7/8" bulkhead both ends, 5/16" threaded ends and will also require a 5/16" swivel u-joint that unhooks from the ball valve. This cable will be used for ease of maintenance and operation.

The control assembly shall include a decorative chrome-plated zinc panel mounted gauge bezel with recessed color-coded label.

Two (2) 2-1/2" IC discharge pressure gauges (0-400 PSI) shall be provided. The face of the gauge shall be a WHITE dial with black letters. The gauges will be located on the pump instrument panel.



RIGHT SIDE PUMP PANEL -- 2-1/2" DISCHARGE

One (1) 2-1/2" discharge shall be installed on the right side pump panel area and shall be controlled by a quarter turn ball valve. The discharge shall have 2-1/2" NST male hose threads. A color coded nameplate label shall be provided adjacent the control handle.

An Innovative Controls 3/4" cast bronze quarter-turn drain/bleeder valve shall be installed. The valve shall be complete with a chrome plated bronze ball, reinforced teflon seals, and blow-out proof stem rated to 600 PSI. A chrome plated zinc handle shall be provided on each drain valve complete with a recessed ID label provision. The handle shall lift to open and push down to close.

One (1) chrome plated elbow with rocker lugs shall be provided with 2-1/2" NST swivel female x 2-1/2" NST male hose threads.

One (1) 2-1/2" NST rocker lug chrome plated vented cap and cable or chain securement shall be provided.

The specified valve shall be an Elkhart two and one half-inch (2-1/2") swing-out ball valve. The valve shall have an all brass body with flow optimizing stainless steel ball and dual polymer seats. The valves shall be capable of bi-directional flow and incorporating a self-locking ball. The valve shall not require lubrication of seats or any other internal waterway parts, and be capable of swinging out of the waterway for maintenance.

For valve actuation, the specified discharge shall be equipped with a side mount valve control, with air craft cable control. The ergonomically designed 1/4 turn push-pull T-handle shall be chrome plated zinc with recessed labels for color coding and signage. The gear-control rod, double laminated locking clips, and rod housing shall be stainless steel and provide true positive lock that will eliminate valve drift. Bronze and Teflon impregnated stainless steel bushings in both ends of rod housing shall eliminate rod deflection, never need lubrication and ensure consistent long-term operation.

The aircraft cable that is used to control the valve, shall be furnished with 7/8" bulkhead both ends, 5/16" threaded ends and will also require a 5/16" swivel u-joint that unhooks from the ball valve. This cable will be used for ease of maintenance and operation.

The control assembly shall include a decorative chrome-plated zinc panel mounted gauge bezel with recessed color-coded label.

One (1) 2-1/2" IC discharge pressure gauges (0-400 PSI) shall be provided. The face of the gauge shall be a WHITE dial with black letters. The gauges will be located on the pump instrument panel.



RIGHT SIDE PUMP PANEL -- 3" DISCHARGE

One (1) 3" discharge shall be installed on the right side pump panel area and shall be controlled by a quarter turn ball valve. The discharge shall have 3" NST male hose threads. A color coded nameplate label shall be provided adjacent the control handle.

An Innovative Controls 3/4" cast bronze quarter-turn drain/bleeder valve shall be installed. The valve shall be complete with a chrome plated bronze ball, reinforced teflon seals, and blow-out proof stem rated to 600 PSI. A chrome plated zinc handle shall be provided on each drain valve complete with a recessed ID label provision. The handle shall lift to open and push down to close.

One (1) lightweight aluminum elbow with 30 degree slant shall be provided. Threads shall be 5" Storz with lugs and manual locks x 3" female swivel NST with rocker lugs.

One (1) 5" lightweight aluminum Storz cap with cable or chain securement shall be provided.

The specified valve shall be an Elkhart three-inch (3") swing-out ball valve. The valve shall have an all brass body with flow optimizing stainless steel ball and dual polymer seats. The valves shall be capable of bi-directional flow and incorporating a self-locking ball. The valve shall not require lubrication of seats or any other internal waterway parts, and be capable of swinging out of the waterway for maintenance.

One (1) manually operated pull rod, with air craft cable control, shall be provided on the specified discharge. The handle shall be equipped with a color-coded nameplate label.

The aircraft cable that is used to control the valve, shall be furnished with 7/8" bulkhead both ends, 5/16" threaded ends and will also require a 5/16" swivel u-joint that unhooks from the ball valve. This cable will be used for ease of maintenance and operation.

One (1) 2-1/2" IC discharge pressure gauges (0-400 PSI) shall be provided. The face of the gauge shall be a WHITE dial with black letters. The gauges will be located on the pump instrument panel.

LEFT SIDE CAT WALK

One (1) **hard suction hose** compartment shall be fabricated and installed on top of the driver's side catwalk. The compartment shall be constructed of **painted** smooth aluminum .

RIGHT SIDE CAT WALK HOSE BED

One (1) **hard suction hose** compartment shall be fabricated and installed on top of the officers side catwalk. The compartment shall be constructed of **painted** smooth aluminum .



RIGHT SIDE FRONT OF HOSEBED -- 2-1/2" DISCHARGE

One (1) 2-1/2" discharge shall be to the right side **front** of hosebed area and controlled by a quarter turn ball valve on the pump panel. The discharge shall have 2-1/2" NPT x 2-1/2" NST male hose threads. An engraved nameplate label shall be provided adjacent the control handle.

An Innovative Controls 3/4" cast bronze quarter-turn drain/bleeder valve shall be installed. The valve shall be complete with a chrome plated bronze ball, reinforced teflon seals, and blow-out proof stem rated to 600 PSI. A chrome plated zinc handle shall be provided on each drain valve complete with a recessed ID label provision. The handle shall lift to open and push down to close.

The specified valve shall be an Elkhart two and one half-inch (2-1/2") swing-out ball valve. The valve shall have an all brass body with flow optimizing stainless steel ball and dual polymer seats. The valves shall be capable of bi-directional flow and incorporating a self-locking ball. The valve shall not require lubrication of seats or any other internal waterway parts, and be capable of swinging out of the waterway for maintenance.

For valve actuation, the specified discharge shall be equipped with a side mount valve control, with air craft cable control. The ergonomically designed 1/4 turn push-pull T-handle shall be chrome plated zinc with recessed labels for color coding and signage. The gear-control rod, double laminated locking clips, and rod housing shall be stainless steel and provide true positive lock that will eliminate valve drift. Bronze and Teflon impregnated stainless steel bushings in both ends of rod housing shall eliminate rod deflection, never need lubrication and ensure consistent long-term operation.

The aircraft cable that is used to control the valve, shall be furnished with 7/8" bulkhead both ends, 5/16" threaded ends and will also require a 5/16" swivel u-joint that unhooks from the ball valve. This cable will be used for ease of maintenance and operation.

The control assembly shall include a decorative chrome-plated zinc panel mounted gauge bezel with recessed color-coded label.

One (1) 2-1/2" IC discharge pressure gauges (0-400 PSI) shall be provided. The face of the gauge shall be a WHITE dial with black letters. The gauges will be located on the pump instrument panel.



3" MONITOR DISCHARGE

One (1) 3" discharge shall be piped to the area over the pump enclosure with 3" NPT male threads provided. The pipe shall be equipped with Victaulic couplings (if necessary) and shall be properly secured to prevent movement when a monitor or deck gun is attached. The quarter turn ball valve shall be controlled on pump panel.

A color coded nameplate label shall be provided adjacent the valve control handle.

An Innovative Controls 3/4" cast bronze quarter-turn drain/bleeder valve shall be installed. The valve shall be complete with a chrome plated bronze ball, reinforced teflon seals, and blow-out proof stem rated to 600 PSI. A chrome plated zinc handle shall be provided on each drain valve complete with a recessed ID label provision. The handle shall lift, to open and push down, to close.

The specified valve shall be an Elkhart three-inch (3") swing-out ball valve. The valve shall have an all brass body with flow optimizing stainless steel ball and dual polymer seats. The valves shall be capable of bi-directional flow and incorporating a self-locking ball. The valve shall not require lubrication of seats or any other internal waterway parts, and be capable of swinging out of the waterway for maintenance.

One (1) manually operated pull rod, with air craft cable control, shall be provided on the specified discharge. The handle shall be equipped with a color-coded nameplate label.

The aircraft cable that is used to control the valve, shall be furnished with 7/8" bulkhead both ends, 5/16" threaded ends and will also require a 5/16" swivel u-joint that unhooks from the ball valve. This cable will be used for ease of maintenance and operation.

One (1) 2-1/2" IC discharge pressure gauges (0-400 PSI) shall be provided. The face of the gauge shall be a WHITE dial with black letters. The gauges will be located on the pump instrument panel.



COBRA EXM MONITOR (7200)

Monitor shall be constructed from durable, hard anodized, lightweight Elk-O-Lite® material with a variable cross-sectional and vaned waterway for flows up to 1250 GPM. The monitor shall be constructed with thrust rods and thrust bearings on both horizontal and vertical rotational joints for improved product longevity.

The monitor shall be configured with 3" or 4" 150# Flange, 3" NPT, 3" BSPT, or DN80 Flange style inlet connection and with 2.5" NHT or 2.5" BSPP style outlet connection.

The monitor shall have two (2) gear motors that allow for simultaneous vertical and horizontal adjustment, one motor shall control the 350 degree horizontal rotation while the other motor shall control the -45 degree to +120 degree vertical rotation from horizontal.

It shall provide an input for a sensor/switch to enable/disable the +90 degree to +120 degree vertical travel, with horizontal and vertical motors shall have a manual override device for use in the event of power failure. All electric controls shall be NEMA 4 rated and allow for programmable horizontal center position, vertical and horizontal stops, stow position, keep out zones, and motor speeds fast or slow. The electric control shall allow for horizontal and vertical oscillation. The electric control shall be CAN and/or radio frequency compatible; electric control shall be compatible with both 12VDC and 24VDC power supply.

EXM STOW MODULE

The Stow Module shall be a Controller Area Network (CAN) Electronic Control Unit (ECU). It shall be connected to the same controller area network as the EXM monitor and read CAN messages to set stow output signals. The CAN Stow Module shall provide a minimum of two (2) stow output signals. Each stow output shall switch to ground when the EXM monitor is not stowed. Each stow output shall switch to open circuit within 5-seconds when the EXM monitor is stowed. Each stow output shall switch to open circuit within 5-seconds if CAN communications to the EXM monitor are lost. CAN Stow Module shall have a NEMA 4 rating with a relay switched output to maintain state when power is disconnected. It shall operate from a supply voltage of 10-30 VDC. At least one stow output shall have over current protection to at least 9 A and 28 VDC. The CAN Stow Module power supply shall have reverse polarity protection and shall incorporate circuit board moisture protection.

EXM PANEL MOUNT CONTROLS

The deck gun controls shall be mounted on the pump panel.



MONITOR EXTENDER

One (1) Elkhart Extender model #8598, part number 08598001, monitor riser shall be provided. The 18" Extender shall be compatible with the Elkhart Vulcan Series monitor's and the range of other compact monitors. The unit shall be designed for use with monitor and nozzle flow at 1250 GPM maximum with 100 PSI nozzle pressure with a maximum inlet pressure rating at 200 PSI.

The unit shall have a push button panel mounted control. The Extender package shall include a variety of wire harnesses in lengths from 5 to 40 feet. The installation shall have an in-cab warning light that shall alert unit is not retracted. The pressure switch shall not allow the Extender to move when internal pressure exceeds 10 PSI.

The unit shall have a 3" Victaulic base by a 3" Flange.

PUMP PANEL --SIDE MOUNT

SIDE MOUNT PUMP ENCLOSURE

The side mount pump enclosure shall be removable and supported from the chassis frame rails. This enclosure will allow independent flexing of the pump enclosure from the body and allow for quick removal. The support structure shall be constructed of extruded aluminum tubing and angle.

All pump suction and discharge controls are to be mounted on the driver side pump operator's panel so as to permit operation of the pump from a central location. The fire pump, valves and controls shall be accessible for service and maintenance as required by applicable sections of NFPA standards.

The "master" gauges shall be suitably enclosed and mounted on a full pump compartment width "hinged" gauge panel constructed of the same material as the pump operators control panel, allowing access to the backside of all gauges and gauge lines. The individual gauges shall be mounted inline with the control handle or adjacent to the control handle. Panel is to include a stainless steel piano hinge, flush mounted chrome plated trigger latch, and stainless steel cable end stops. Electrical wiring and all gauge lines shall be properly tie wrapped to prevent kinking or cutting of the lines when the panel is opened.



The following controls and equipment as specified in the specifications, shall be provided on the pump panel or within the pump enclosure:

- Primer.
- Pump and plumbing area service lights.
- Pressure control device and throttle control.
- Fire pump and engine instruments.
- Pump intakes and discharge controls.
- Master intake and discharge gauges.
- Tank fill control.
- Tank suction control.
- Water tank level gauge.
- Pump panel lights.

Crosslay Installation

The area atop the pump enclosure shall be notched for the installation of a crosslay hose bed. The hosebed shall have smooth sides and a perforated floor to allow for drainage. Provisions shall be provided to secure hose and equipment per requirements of applicable NFPA standards.

COMPARTMENTS -- AHEAD OF PUMP ENCLOSURE

The area to the front of the pump enclosure shall be an equipment compartment. The compartment shall be located between the running board and shall extend right to left across the chassis frame rails.

The compartment shall be integral with pump enclosure and constructed of same material as pump enclosure.

The compartment shall be equipped with a lap door storage module on the officer's side and a pullout storage module on the driver's side with an appropriate latch. The compartments shall be provided with floor drains, vent, and compartment lights.

The compartment dimensions shall be approximately 14.5 WIDE, and 27" depth, and 33" High on the driver's side, with a Lap door compartment with line x finish. This compartment will house 1 set of clean bunker gear with bottle.

The compartment on the officer's side shall be approximately 33" front to rear width, and 27" depth, and 75" high on the officer's side with line x finish.



An electric roll-out equipment tray shall be installed in the compartment. The tray with telescoping slides and cam follower bearings shall be rated to a maximum load of 500 lbs. The tray shall have an electric powered motor.

The tray shall be formed of .188" smooth aluminum plate, fabricated with a storage module to house 3 sets of clean turn out gear with airpacks and a Ric Kit.

Inside the cab there is a rocker switch labeled "RESCUE MODE". When the switch is turned on to "RESCUE MODE", and when the park brake is applied this will auto deploy the officers side clean bunker storage module.

There shall be a Red E-Stop button on the side of the apparatus.
This E-Stop will disable all electric power to the side storage module.

COMPARTMENT LIGHT

One (1) LED light fixture shall be installed in the upper area of the exterior compartment of the apparatus. The light shall have a clear lens.

The compartment light will be controlled by an automatic "On-Off" switch located on each compartment door.

LEFT SIDE RUNNING BOARD -- SIDE MOUNT PANEL

The left side mount pump panel shall be equipped with side running board. The running board will extend along the width of the pump enclosure from the forward end of the body module to behind the chassis cab.

The running board shall be constructed of aluminum tread plate, bolted in place with stainless steel fasteners. The step surfaces shall be in compliance with applicable sections of NFPA requirements.

RIGHT SIDE RUNNING BOARD -- SIDE MOUNT PANEL

The right side mount pump panel shall be equipped with side running board. The running board will extend along the width of the pump enclosure from the forward end of the body module to behind the chassis cab.

The running board shall be constructed of aluminum tread plate, bolted in place with stainless steel fasteners. The step surfaces shall be in compliance with applicable sections of NFPA requirements.



PUMP ENCLOSURE ACCESS DOOR -- RIGHT SIDE UPPER

A pump panel access door shall be provided on the upper right side of the side mount pump enclosure. The access door shall be approximately 18" high and as wide as possible. The door shall be constructed of aluminum tread plate with push button type latches.

PUMP PANEL -- SIDE MOUNT

The pump operator's panel, along with the lower left hand and right hand pump panels shall be constructed of Line-X aluminum material and be fastened to the pump enclosure with 1/4" stainless steel bolts.

The instrument area shall have a stainless steel continuous hinge that shall swing for easy access to gauges.

LEFT SIDE PUMP PANEL -- BOLTED

The pump panel installed on the left hand side of the pump enclosure shall be fastened to the pump enclosure with 1/4" stainless steel bolts.

RIGHT SIDE PUMP PANEL -- BOLTED

The pump panel installed on the right hand side of the pump enclosure shall be fastened to the pump enclosure with 1/4" stainless steel bolts.

LABELS

Safety, information, data, and instruction labels for apparatus shall be provided and installed at the operator's instrument panel.

The labels shall include rated capacities, pressure ratings, and engine speeds as determined by the certification tests. The no-load governed speed of the engine, as stated by the engine manufacturer, shall also be included.

The labels shall be provided with all information and be attached to the apparatus prior to delivery.

COLOR CODED PUMP PANEL LABELING AND NAMEPLATES

Discharge and intake valve controls shall be color coded in compliance to guidelines of applicable sections of NFPA standards.

Innovative Controls permanent type nameplates and instruction panels shall be installed on the pump panel for safe operation of the pumping equipment and controls.



MIDSHIP PUMP PANEL LIGHTS -- LEFT SIDE

Three (3) Techiq E10-W0001-1 or equal LED lights with clear lenses shall be installed under an instrument panel light hood on the left side pump panel. The lights shall be controlled by a switch located on the operator's instrument panel.

MIDSHIP PUMP PANEL LIGHTS -- RIGHT SIDE

Two (2) Tecniq E10-W0001-1 or equal LED lights with clear lenses shall be installed under an instrument panel light hood on the right side pump panel. The lights shall be controlled by a switch located on the operator's instrument panel.

PUMP ENGAGED LIGHT

One (1) pump panel light shall be illuminated at the time the fire pump is engaged into operation. The remaining lights shall be controlled by a switch located on the operator's instrument panel.

MASTER DISCHARGE AND INTAKE GAUGES

Two (2) 4" diameter IC discharge pressure and intake gauges (30"-0-600 PSI) shall be provided. The face of the gauge shall be a WHITE dial with black letters. The gauges will be located on the pump instrument panel.

The master gauges shall have clear scratch resistant molded crystals with captive O-ring seals shall be used to ensure distortion free viewing and to seal the gauge. The gauges shall be filled with a synthetic mixture to dampen shock and vibration, lubricate the internal mechanisms, prevent lens condensation and ensure proper operation from -40°F to +160°F. Each gauge shall exceed ANSI B40.1 Grade A requirements with an accuracy of +/- 1.5% full scale and include a size appropriate phosphorous bronze bourdon tube with a reinforced lap joint and large tube base to increase the tube life and gauge accuracy. A polished chrome-plated brass bezel shall be provided to prevent corrosion and protect the lens and gauge case.

TEST TAPS

Test taps for pump intake and pump pressure shall be provided on the pump instrument panel and be properly labeled.



WATER TANK GAUGE

One (1) Fire Research TankVision Pro model WLA300-A00 tank indicator kit shall be installed on the pump panel. The kit shall include an electronic indicator module, a pressure sensor, and a 10' sensor cable. The indicator shall show the volume of water in the tank on nine (9) easy to see super bright RGB LEDs. A wide view lens over the LEDs shall provide for a viewing angle of 180 degrees. The indicator case shall be waterproof, manufactured of Polycarbonate/Nylon material, and have a distinctive blue label.

The program features shall be accessed from the front of the indicator module. The program shall support self-diagnostics capabilities, self-calibration, six (6) programmable colored light patterns to display tank volume, adjustable brightness control levels and a datalink to connect remote indicators. Low water warnings shall include flashing LEDs at 1/4 tank, down chasing LEDs when the tank is almost empty, and an output for an audio alarm.

The indicator shall receive an input signal from an electronic pressure sensor. The sensor shall be mounted from the outside of the water tank near the bottom. No probe shall place on the interior of the tank. Wiring shall be weather resistant and have automotive type plug-in connectors.

PTO SWITCH

A **PTO** switch with indicator shall be installed on the cab dash and at the **pump panel** to control the **PTO**. The switches shall be wired to operate in a three-way configuration to allow the **PTO** to be controlled from either location regardless of switch position. The switches shall be labeled "**PTO**".

WATER TANKS

WATER TANK - 750 GALLON

The apparatus shall be equipped with a seven-hundred-fifty (750) gallon polypropylene water tank. The tank shall be equipped with a four-inch (4") overflow pipe (a six-inch (6") overflow pipe shall be provided if required by dump valve installation).

WATER TANK

The apparatus shall be equipped with a rectangular tank.



WATER TANK FILL TOWER

A fill tower measuring approximately 10" x 10" square shall be provided on the water tank up to and including 1500 gallons total capacity.

The apparatus shall be equipped with a polypropylene water tank. The tank body and end bulkheads shall be constructed of .75" thick, polypropylene, nitrogen-welded and tested inside and out. Tank construction shall conform to applicable NFPA standards. The tank shall carry a lifetime warranty.

The transverse and longitudinal .375" thick swash partitions shall be interlocked and welded to each other as well as to the walls of the tank. The partitions shall be designed and equipped with vent holes to permit air and liquid movement between compartments.

The .5" thick cover shall be recessed .375" from the top of the side walls. Hold down dowels shall extend through and be welded to both the covers and the transverse partitions, providing rigidity during fast fill operations. Drilled and tapped holes for lifting eyes shall be provided in the top area of the booster tank.

A combination vent/water fill tower shall be provided at front of the tank. The 0.5" thick polypropylene fill and overflow tower shall be equipped with a hinged lid and a removable polypropylene screen. The overflow tube shall be installed in fill tower and piped with a minimum schedule 40 PVC pipe through the tank.

The water tank sump shall be located in the forward area of the tank. There will be a schedule 40 polypropylene tank suction pipe from the front of the tank to the tank sump. The tank drain and clean out shall be located in the bottom of the tank sump. The sump shall have a minimum 3" threaded outlet on the bottom to be used for a combination clean out and drain.

The pump to tank refill connection shall be sized to mate with tank fill discharge line. A deflector shield inside the tank will also be provided.

The tank shall rest on the body cross members in conjunction with such additional cross members, spaced at a distance that would not allow for more than 530 square inches of unsupported area under the tank floor. In cases where overall height of the tank exceeds 40 inches, cross member spacing must be decreased to allow for not more than 400 square inches of unsupported area.

The tank must be isolated from the cross members through the use of hard rubber strips with a minimum thickness and width dimension of 1/4" x 1" and a hardness of approximately 60 durometer. The rubber must be installed so it will not become dislodged during normal operation of the vehicle. Additionally, the tank must be supported around the entire bottom outside perimeter and captured both in the front and rear as well as side to side to prevent tank from shifting during vehicle operation.



A picture frame type cradle mount with a minimum of 2" x 2" x 1/4" mild steel, stainless steel, or aluminum angle shall be provided or the use of corner angles having a minimum dimension of 4" x 4" x 1/4" by 6" high are permitted for the purpose of capturing the tank.

Although the tank is designed on a free floating suspension principle, it is required that the tank have adequate vertical hold down restraints to minimize movement during vehicle operation. If proper retention has not been incorporated into the apparatus hose floor structure, an optional mounting restraint system shall be located on top of the tank, half way between the front and the rear on each side of the tank. These stops can be constructed of steel, stainless steel or aluminum angle having minimum dimensions of 3" x 3" x 1/4" and shall be approximately 6" to 12" long. These brackets must incorporate rubber isolating pads with a minimum thickness of 1/4" inch and a hardness of 60 durometer affixed on the underside of the angle. The angle should then be bolted to the body side walls of the vehicle while extending down to rest on the top outside edge of the upper side wall of the tank.

Hose beds floors must be so designed that the floor slat supports extend full width from side wall to side wall and are not permitted to drop off the edge of the tank or in any way come in contact with the individual covers where a puncture could occur. Tank top must be capable of supporting loads up to 200 lbs per sq. foot when evenly distributed. Other equipment such as generators, portable pumps, etc. must not be mounted directly to the tank top unless provisions have been designed into the tank for that purpose. The tank shall be completely removable without disturbing or dismantling the apparatus structure.

The water tank shall be certified for the capacity of the water tank prior to delivery of the apparatus. This capacity shall be recorded on the manufacturer's record of construction and the certification shall be provided to the purchaser when the apparatus is delivered.



HOSEBED

HOSEBED SINGLE AXLE

The hose bed compartment deck shall be constructed entirely from maintenance-free, extruded aluminum slats. The slats shall have an anodized, radiused ribbed top surface. The slats shall be of widths approximately 3/4" high x 6" wide and shall be welded into a one-piece grid system to prevent the accumulation of water and allow ventilation to assist in drying hose.

The apparatus hose body shall be properly reinforced without the use of angles or structural shapes and free from all projections that might injure the fire hose.

The main apparatus hose body shall run the full length of the apparatus body from behind the pump panel area to the rear face of the body.

The upper rear interior of the hose body on the right and left sides shall be overlaid with brushed stainless steel to protect the painted surface from damage by hose couplings.

HOSE BED STORAGE CAPACITY

The hose bed shall be designed to have a storage capacity for a minimum of 55 cubic feet of fire department supplied fire hose.

ALUMINUM HOSEBED DIVIDER

One (1) adjustable hosebed divider constructed of .250" aluminum shall be installed on the apparatus.

VINYL HOSEBED COVER

The apparatus shall be equipped with a vinyl hosebed cover.

The cover, approximately 74" wide, shall be secured utilizing a velcro fastening system at the front and sides of the hosebed body.

The vinyl cover shall be red in color.

BODY CONSTRUCTION



MODULAR BODY

1/8" ALUMINUM BODY

The body shall be fabricated of aluminum extrusions, smooth aluminum sheet and aluminum treadplate.

The aluminum extrusion alloy shall be 6061 with a temper rating of T6, and have a tensile strength of 45,000 PSI and yield strength of 40,000 pounds. The aluminum extrusions shall 3" x 3" aluminum tubing, 1-3/4" x 3" aluminum tubing and 3" x 3" aluminum angle and specially designed extrusions, up to .250" wall thickness where applicable.

The smooth aluminum sheet material alloy shall be 5052 with a temper rating of H32, and have a tensile strength of 33,000 PSI and yield strength of 28,000 pounds.

The aluminum treadplate alloy shall be 3003 with a temper rating of H22, and have a tensile strength of 30,000 PSI and yield strength of 28,000 pounds.

The extrusions shall be designed as structural-framing members with the smooth aluminum and treadplate fabricated to form compartments, hosebeds, and floors. All aluminum material shall be welded together using the latest mig spray pulse arc welding system.

Compartment floors shall be of the sweep out design with the floor higher than the compartment door lip and to be water and dust proof. All compartments shall be made to the maximum practical dimensions to provide maximum storage capacity. To ensure maximum storage space, the apparatus shall be constructed without any void spaces between the body and the compartment walls. Double wall construction does not meet this requirement.

All exterior compartments shall have polished aluminum drip moldings installed above the doors where necessary to prevent water from entering the compartments.

Wheel well panels shall be formed aluminum that is welded in place. There shall be no visible bolt heads, retention nuts or fasteners on the exterior surface of the panel. To fully protect the wheel well area from road debris and to aid in cleaning, a full depth radius wheel well liner shall be provided. The frame side of the wheel well area on each side of the opening shall be attached to the frame side of the front and rear compartments. All seams on the frame side of the body shall be welded and caulked to prevent moisture from entering the compartments.

The rear wheel wells shall be radius cut for a streamlined appearance. A fenderette shall be furnished at each rear wheel well opening, held in place with stainless steel fasteners.



FASTENERS

All aluminum and stainless steel components shall be attached using stainless steel fasteners.

Compartment door hinges, handrails and running boards shall be attached using minimum 1/4" diameter machine bolt fasteners.

3/16" diameter fasteners shall only be used in nonstructural areas such as; door handles, trim moldings, gauge mounting, etc.

ELECTROLYSIS CORROSION CONTROL

The apparatus shall be assembled using ECK or electrolysis corrosion control, on all high corrosion potential areas, such as door latches, door hinges, trim plates, fenderettes, etc. This coating is a high zinc compound that shall act as a sacrificial barrier to prevent electrolysis and corrosion between dissimilar metals. This shall be in addition to any other barrier material that may be used.

All 1/4" diameter and smaller screws and bolts shall be stainless steel.

Due to the expected life of the vehicle, proposals will only be acceptable from manufacturers that include these corrosion features.

COMPARTMENT FLOORS

The compartment floors shall be constructed of smooth aluminum material, to match the compartment interior walls.



EXTREME DUTY SUB-FRAME

The subframe shall be provided with reinforced "Severe Duty" construction consisting of double gussets and additional structural steel tubing. The subframe shall be mounted with stress isolating rubber cone bearings on the chassis frame rails. This provides optimum weight distribution on the axles assuring the required soft soil mobility and maximum traction for cross-country travel.

The apparatus shall be constructed using an extreme-duty steel subframe. This subframe shall be independent of the chassis frame and support the body and equipment. The upper portion of the extreme duty subframe shall be constructed of heavy duty 1.5" x 3" 7 gauge steel tube, 3" channel and plate steel gussets. It shall be designed to "cradle" the tank transversely and longitudinally to prevent fore and aft motion, yet allowing the tank to "float", preventing twisting of the tank on uneven terrain. The upper portion of the extreme duty subframe shall include heavy duty outriggers to support the body and equipment. The front of the subframe shall be mounted to the chassis using stress isolating rubber cone bearing to reduce twisting stress on the body. The rear platform itself shall be constructed from 1.5" x 3" 7 gauge steel tube and 2"x3"x1/4" steel angle and shall support the rear compartment and the rear of the body.

After fabrication the entire subframe assembly shall be hot dip galvanized to prevent corrosion. The hot dip galvanized subframe shall have a lifetime warranty against failure due to corrosion.

BODY CONFIGURATION

The aluminum apparatus body shall be up to 144" long, reference the drawing for actual body length.

SINGLE AXLE WHEEL AREA

For ease of accessibility and maintenance, wheel well panels shall be double break formed painted smooth plate that is welded in place.

To fully protect the wheel well area from road debris and to aid in cleaning, a full depth (minimum of 25") radius wheel well liner shall be provided. Wheel well liner shall be smooth aluminum to prevent corrosion.

FENDERETTES

The rear wheel wells shall be radius cut for a streamlined appearance. A polished aluminum fenderette shall be furnished at each rear wheel well opening, held in place with concealed stainless steel fasteners.



BODY WIDTH

The overall width of the pumper body shall not exceed 102".

COMPARTMENT DEPTH

The left side compartments on the pumper body shall have the following dimensions:

Lower portion depth of 26"

Upper portion depth of 13"

The lower right side compartments on the pumper body shall be 26" deep.

HOSEBED WIDTH

The width of the pumper body hosebed shall be 74".

COMPARTMENT HEIGHT

The left side body compartments shall be 63" high.

COMPARTMENT HEIGHT

The right side body compartments shall be 63" high.



ROLL UP DOOR CONSTRUCTION

The roll up door(s) shall be fabricated from aluminum extrusions and be manufactured and assembled in the United States.

The door slats shall be double-wall extrusions with dimensions of 1.366" high x .315" thick. The exterior surface shall be flat and the interior surface concave to deflect loose equipment to prevent the door from jamming. Each slat shall have interlocking end shoes to prevent the slat from moving side to side resulting in binding of the door. Each slat shall be separated by a co-extruded PVC and rubber inner seal to prevent metal to metal contact and minimize dirt and moisture from entering the compartment. The inner seal shall not be visible from the exterior to maintain a clean appearance of door. The slats shall have interlocking joints with a folding locking flange to provide security and prevent penetration by sharp objects.

The track shall be a one (1) piece aluminum assembly that has an attaching flange and finishing flange incorporated into the design that facilitates installation and provides a finished look to the door without additional trim or caulking. A low profile side seal shall be utilized to maximize usable compartment space.

A drip rail designed to prevent water from dripping into the compartment shall be provided. The drip rail shall have a built in replaceable non-contacting seal to eliminate scratching of the surface of the door.

Bottom rail extrusion must have smooth back to prevent loose equipment from jamming the door and have "V" shaped double seal to prevent water and debris from entering the compartment. The door latch system shall be a full width one (1) piece lift bar that enables the user to operate with one hand.

The roll mechanism shall have a clip system that connects the curtain slats to the operator drum to allow for easy tension adjustment without tools. A four (4) inch diameter counterbalanced operator drum to shall be incorporated to assist in lifting the door.

DOOR LOCKS

A cylindrical door lock shall be provided on the roll up door(s). The door lock shall operate a rod mechanism located within the bottom rail of the door that extends into both side rails when locked.



LEFT FRONT COMPARTMENT

There shall be one (1) full height compartment located ahead of the rear wheels. The compartment shall be equipped with a full height single **painted** roll up door.

The compartment shall be equipped with the following:

One (1) louver with filter shall be installed in the compartment.

ADJUSTABLE SHELVING TRACKS

The compartments shall be equipped with two (2) aluminum adjustable tracks, vertically mounted, that are bolted in place for adjustable shelving and equipment mounting.

ADJUSTABLE SHELF

One (1) adjustable shelf shall be constructed of .125" smooth aluminum plate with 1.5" formed vertical lip front & back. Shelf supports on each side to be constructed of .188" aluminum and bolted to an aluminum extrusion (mounted vertically) by use of 3/8" bolts and spring-loaded cam locks. If shelf is longer than 40" a reinforcement by aluminum gusset is to be placed full-length on bottom of shelf.

500# ROLLOUT TRAY

One (1) roll-out equipment tray shall be installed in the compartment. The tray with extruded slides and stainless steel bearings shall be rated to a maximum load of 500 lbs. There shall be a lock to prevent movement, when the tray is in the closed position.

The tray shall be formed of .188" smooth aluminum plate, fabricated with two (2) inch sides. Reflective material measuring 1" x 6" shall be installed on each front corner both on the face and side of tray for firefighter safety.

COMPARTMENT LIGHTS

Two (2) ROM vertically mounted roll-up compartment LED V3 door lights shall be installed one each side of the door opening. The compartment lights shall be integrated into the roll-up door tracks with the light actuation with the door opening.

The lights shall have a polycarbonate lens to eliminate breakage from impact and eliminate heat buildup.

The compartment light will be controlled by a magnetic "On-Off" switch located on each compartment door.



LEFT OVERWHEEL COMPARTMENT

There shall be one (1) compartment above the rear wheels. The compartment shall be equipped with a single **painted** roll up door.

The compartment shall be equipped with the following:

One (1) louver with filter shall be installed in the compartment.

ADJUSTABLE SHELVING TRACKS

The compartments shall be equipped with two (2) aluminum adjustable tracks, vertically mounted, that are bolted in place for adjustable shelving and equipment mounting.

ADJUSTABLE SHELF

One (1) adjustable shelf shall be constructed of .125" smooth aluminum plate with 1.5" formed vertical lip front & back. Shelf supports on each side to be constructed of .188" aluminum and bolted to an aluminum extrusion (mounted vertically) by use of 3/8" bolts and spring-loaded cam locks. If shelf is longer than 40" a reinforcement by aluminum gusset is to be placed full-length on bottom of shelf.

COMPARTMENT LIGHTS

Two (2) ROM vertically mounted roll-up compartment LED V3 door lights shall be installed one each side of the door opening. The compartment lights shall be integrated into the roll-up door tracks with the light actuation with the door opening.

The lights shall have a polycarbonate lens to eliminate breakage from impact and eliminate heat buildup.

The compartment light will be controlled by a magnetic "On-Off" switch located on each compartment door.

LEFT REAR COMPARTMENT

There shall be one (1) full height compartment located behind the rear wheels. The compartment shall be equipped with a full height single **painted** roll up door.

The compartment shall be equipped with the following:

One (1) louver with filter shall be installed in the compartment.



ADJUSTABLE SHELVING TRACKS

The compartments shall be equipped with two (2) aluminum adjustable tracks, vertically mounted, that are bolted in place for adjustable shelving and equipment mounting.

COMPARTMENT LIGHTS

Two (2) ROM vertically mounted roll-up compartment LED V3 door lights shall be installed one each side of the door opening. The compartment lights shall be integrated into the roll-up door tracks with the light actuation with the door opening.

The lights shall have a polycarbonate lens to eliminate breakage from impact and eliminate heat buildup.

The compartment light will be controlled by a magnetic "On-Off" switch located on each compartment door.

RIGHT FRONT COMPARTMENT

There shall be one (1) full height compartment located ahead of the rear wheels. The compartment shall be equipped with a full height single **painted** roll up door.

The compartment shall be equipped with the following:

One (1) louver with filter shall be installed in the compartment.

ADJUSTABLE SHELVING TRACKS

The compartments shall be equipped with two (2) aluminum adjustable tracks, vertically mounted, that are bolted in place for adjustable shelving and equipment mounting.

ADJUSTABLE SHELF

One (1) adjustable shelf shall be constructed of .125" smooth aluminum plate with 1.5" formed vertical lip front & back. Shelf supports on each side to be constructed of .188" aluminum and bolted to an aluminum extrusion (mounted vertically) by use of 3/8" bolts and spring-loaded cam locks. If shelf is longer than 40" a reinforcement by aluminum gusset is to be placed full-length on bottom of shelf.



COMPARTMENT LIGHTS

Two (2) ROM vertically mounted roll-up compartment LED V3 door lights shall be installed one each side of the door opening. The compartment lights shall be integrated into the roll-up door tracks with the light actuation with the door opening.

The lights shall have a polycarbonate lens to eliminate breakage from impact and eliminate heat buildup.

The compartment light will be controlled by a magnetic "On-Off" switch located on each compartment door.

LEFT OVERWHEEL COMPARTMENT

There shall be one (1) compartment above the rear wheels. The compartment shall be equipped with a single **painted** roll up door.

The compartment shall be equipped with the following:

One (1) louver with filter shall be installed in the compartment.

ADJUSTABLE SHELVING TRACKS

The compartments shall be equipped with two (2) aluminum adjustable tracks, vertically mounted, that are bolted in place for adjustable shelving and equipment mounting.

ADJUSTABLE SHELF

One (1) adjustable shelf shall be constructed of .125" smooth aluminum plate with 1.5" formed vertical lip front & back. Shelf supports on each side to be constructed of .188" aluminum and bolted to an aluminum extrusion (mounted vertically) by use of 3/8" bolts and spring-loaded cam locks. If shelf is longer than 40" a reinforcement by aluminum gusset is to be placed full-length on bottom of shelf.

REAR COMPARTMENT

There shall be one (1) full height compartment module located behind the rear wheels. The compartment module shall be equipped with a full height **painted** roll up door.

The compartment shall be equipped with the following:

REAR BODY CONFIGURATION

The rear of the apparatus body shall be of the flat back design.



REAR STEP - 12" BOLT-ON

A 12" deep step surface shall be provided at the rear of the apparatus body, bolted in place and easily removable for replacement or repair. The tailboard shall be constructed of .188" aluminum diamond plate or equal non-slip surface in compliance with NFPA #1901 standards.

A label shall be provided warning personnel that riding on the rear step while the apparatus is in motion is prohibited.

REAR CENTER COMPARTMENT

There shall be one (1) full height compartment located at the rear of the apparatus. The compartment shall be 60.5" high x 38" deep x 48" wide and be equipped with a double lap door. The compartment shall be partitioned off from the side compartments.

The compartment shall have full height lap doors.

Inside the cab there is a rocker switch labeled "RESCUE MODE". When the switch is turned on to "RESCUE MODE", and when the park brake is applied this will auto deploy the rear storage module.

There shall be a Red E-Stop button on the rear of the apparatus. This E-Stop will disable all electric power to the rear storage module.

A removable louvered vent shall be provided in the compartment.

ADJUSTABLE SHELVING TRACKS

The compartments shall be equipped with two (2) aluminum adjustable tracks, vertically mounted, that are bolted in place for adjustable shelving and equipment mounting.

1000# ELECTRIC ROLLOUT TRAY

One (1) **ELECTRIC ROLLOUT** equipment tray(s) shall be installed **in the rear compartment**. The tray assembly shall have a **stainless steel** slide frame with sealed roller bearings rated to 1,000 pounds. A tray constructed of .190" smooth aluminum plate with four 3" sides shall be mounted to the slide frame. The slide frame shall extend **100%** out of **the rear** compartment allowing the tray to be easily accessible from outside the compartment. The slide shall have a 3-3/8" deck height.

**46" WIDE
33" DEEP**



COMPARTMENT LIGHTS

Two (2) vertically mounted LED strip lights shall be installed inside the compartment. The lights shall have a polycarbonate lens to eliminate breakage from impact and eliminate heat build up and each light shall be approximately 48" in length.

The compartment light will be controlled by a magnetic "On-Off" switch located on each compartment door.

SLIDE OUT VERTICAL LADDER MOUNTINGS

The ladder shall slide into the left rear of the apparatus, through the left side of the body. The vertically mounted slide in assembly shall be an integral part of the body and accessible through a hinged door.

The hinged door shall be constructed of smooth material, with chevron striping applied to match the rear of the apparatus body.

INTERNAL FOLDING ATTIC LADDER MOUNTING

An internal mounting shall be provided for the specified folding attic ladder.

LADDER SOURCE

New ground ladders shall be provided by the body builder.

HARD SUCTION MOUNTING

One (1) hard suction hose compartment shall be provided above the body compartments, on the right side. The design shall allow the hose to be individually removed from the rear of the apparatus. The hard suction compartment shall be constructed of smooth material painted to match the body. The hard suction hose compartment shall have a hinged door with push to latch door catches.

The hinged door shall be constructed of smooth material, with chevron striping applied to match the rear of the apparatus body.



HARD SUCTION MOUNTING

One (1) hard suction hose compartment shall be provided above the body compartments, on the left side. The design shall allow the hose to be individually removed from the rear of the apparatus. The hard suction compartment shall be constructed of smooth material painted to match the body and shall be equipped with a hinged door with push to latch door catches.

The hinged door shall be constructed of smooth material, with chevron striping applied to match the rear of the apparatus body.

SUCTION HOSE SOURCE

New suction hose shall be provided by the body builder.

FRONT BODY PROTECTION PANELS

Aluminum tread plate overlays and panels shall be installed on the front of the body compartment from the lower edge to the top of the compartment doors.

REAR BODY PROTECTION PANELS

The rear body panels of the body shall be a smooth material, to allow for the proper application and installation of a "Chevron" stripe on the rear.

FOLDING STEP RIGHT REAR

Three (3) 8" square folding steps of chrome plated die cast aluminum shall be provided. The steps shall comply to NFPA #1901 non-slip standards and shall be installed on the rear right side of the body.

HANDRAIL REAR STEP

Two (2) extruded aluminum non-slip handrails, approximately 30" in length, shall be provided and vertically mounted on the rear of the apparatus, one (1) on each side of the body.

HANDRAIL BELOW HOSEBED

One (1) extruded aluminum non-slip handrail, approximately 48" in length, shall be provided and horizontally mounted below the hosebed on the rear of the apparatus.

EXTRUDED ALUMINUM RUB RAILS

Full body length polished aluminum rub rails shall be bolted in place on the lower right and left body sides. The side rub rails shall be a heavy extruded aluminum "C" channel.



NYLON SPACERS FOR RUB RAILS

There shall be nylon spacers provided between the rub rail and the body. This shall allow wash out and replacement in the event of damage.

WHEEL WELL PROVISION LOCATION

The wheel well provisions shall be located on the left side of the apparatus, ahead of the rear wheels.

One (1) breathing air cylinder storage compartment shall be provided and located in the rear wheel well of the apparatus body.

The cylinder storage compartment shall be constructed entirely of aluminum. The door assemblies shall be provided with a gasket between door and body side, bolted in-place and removable for repair or replacement.

Compartment shall be provided with SCBA cylinder scuff protection. A brushed stainless steel door shall be installed.

One (1) one-inch (1") wide loop of black webbing shall be installed in each SCBA compartment to prevent the bottle from sliding out of the compartment in case of door failure. The loop shall be mounted, centered in the compartment and shall hang within one-inch (1") of the compartment floor to allow the bottle to pass by the strap when the bottle is placed in the compartment. The strap shall loop over the valve.

WHEEL WELL PROVISION LOCATION

The wheel well provisions shall be located on the left side of the apparatus, behind of the rear wheels.

FUEL PIPING AND FILL CAP

There shall be a fuel fill cap provided in the recessed area of the left side rear wheel well clearly marked, "DIESEL FUEL ONLY". The fill shall be piped to the fuel tank.



WHEEL WELL PROVISION LOCATION

The wheel well provisions shall be located on the right side of the apparatus, ahead of the rear wheels.

One (1) storage compartment for floor dry shall be provided and located in the rear wheel well of the apparatus body. The storage compartment shall be constructed of aluminum, mounted on slides, to allowing the compartment to pull out for filling. The door assembly shall be provided with a gasket between the door and the body side, bolted in place and removable for repair or replacement. A brushed stainless steel door, with D-ring, shall be provided.

WHEEL WELL PROVISION LOCATION

The wheel well provisions shall be located on the right side of the apparatus, behind of the rear wheels.

One (1) breathing air cylinder storage compartment shall be provided and located in the rear wheel well of the apparatus body.

The cylinder storage compartment shall be constructed entirely of aluminum. The door assemblies shall be provided with a gasket between door and body side, bolted in-place and removable for repair or replacement.

Compartment shall be provided with SCBA cylinder scuff protection. A brushed stainless steel door shall be installed.

One (1) one-inch (1") wide loop of black webbing shall be installed in each SCBA compartment to prevent the bottle from sliding out of the compartment in case of door failure. The loop shall be mounted, centered in the compartment and shall hang within one-inch (1") of the compartment floor to allow the bottle to pass by the strap when the bottle is placed in the compartment. The strap shall loop over the valve.



GREEN STAR IDLE REDUCTION TECHNOLOGY (IRT)

A Green Star idle reduction technology system shall be supplied with the apparatus that will significantly reduce the amount of diesel exhaust soot, NOx and CO2 emissions into the atmosphere. Diesel engines contain pollutants that negatively impact human health and the environment. Diesel engine exhaust contains particulate (black soot), hydrocarbons, carbon monoxide and nitrogen oxides.

The Green Star IRT system shall be supplied with the apparatus that will significantly reduce fuel consumption and the amount of diesel exhaust particulates (black soot), hydrocarbons, carbon monoxide and nitrogen oxides released into the atmosphere. IRT has been verified by the U.S. EPA to reduce emissions from diesel powered vehicles.

A Green Star IRT will reduce idle time, fuel consumption and release of toxic pollutants through use of an auxiliary power unit (APU) in conjunction with automatic chassis engine controls. An APU is U.S. EPA listed as a method to reduce emissions. The automatic chassis engine controls will shut down the chassis diesel engine during times not requiring the chassis diesel engine. When the chassis diesel engine is not required a timer will start. When the timer has nearly expired the APU will be engaged and the chassis diesel engine will be shut down.

The chassis is protected against low chassis battery voltage. If during the idle reduction the chassis battery voltage drops below a safe level, the automatic engine controls will restart the chassis engine.

GREEN STAR "INHIBIT" SWITCH

There shall be a momentary rocker switch with green indicator on the cab switch panel labeled "INHIBIT". When activated, the switch shall "INHIBIT" or prevent the automatic operation of the Green Star IRT system.

AUXILIARY POWER UNIT (APU)

A Kubota D1105-BG EPA and CARB tier 4 rated diesel generator engine with a power rating of 7.9 KW will be provided. The Kubota engine will drive a Mecc Alte NPE32-B/4 industrial duty 4 pole, 60Hz, 120/240VAC, brushless, digitally regulated generator. The Mecc Alte generator will have a continuous rating of 10.5KW. The engine and generator will run 1800RPM. This lower RPM leads to substantially longer life and less maintenance compared to other APU systems. Total standard 12VDC power output is 270AMPS. An APU on/off switch will be provided in the chassis cab to start and stop the APU on demand.

GENERATOR MOUNTING LOCATION

The generator shall be installed in the front section of the hosebed.



CIRCUIT BREAKER BOX

One (1) circuit breaker box for single phase voltage equipment shall be provided capable of holding four (4) breakers.

CIRCUIT BREAKER BOX LOCATION

The circuit breaker box shall be installed in an outside body compartment.

The instrument panel for the generator shall be installed next to the breaker panel.

120V ELECTRIC RECEPTACLE -- STRAIGHT BLADE

Four (4) 120-volt 20 amp straight blade, 3-prong duplex receptacle with spring loaded weatherproof cover shall be provided.

The electric receptacle shall be located inside the left side exterior body compartment ahead of the rear wheels.

The electric receptacle shall be located inside the left side exterior body compartment behind the rear wheels.

The electric receptacle shall be located inside the right side exterior body compartment ahead of the rear wheels.

The electric receptacle shall be located inside the right side exterior body compartment behind the rear wheels.

The apparatus shall be equipped with one (1) a pneumatically raised vertical light tower. The tower shall have an extended height of approximately 20 feet, with a total payload capacity of 70 pounds. The tower shall be designed to sustain the intended tip load with a 125 percent safety factor. The tower shall withstand a minimum 50 MPH wind when in a fully raised and unguided position.

The installation of the light tower shall meet applicable sections of the NFPA standards.

Light System

Four (4) **Pioneer Max Flood/Spot, 225 Watts, White 120 VAC.**



Pneumatic Controls

The pneumatic controls to raise or lower the tower shall include an air regulator with integral filter, lubricator, and solenoid valves. The tower shall be able to be fully elevated in two (2) minutes or less. In the event of malfunction of the elevating system while the tower is in operation or being deployed, a method of limiting the rate of descent shall be provided to prevent injury to personnel or damage to the equipment.

The pneumatic operation of the tower shall be accomplished with air supplied from the chassis brake system. A pressure protection valve and auxiliary air tank(s) shall be provided in conformance to the NFPA and FVMSS brake standards.

MOUNTING – LIGHT TOWER CONTROLS

The controls for the light tower shall be mounted in the left front compartment.

PAINT - LETTERING and STRIPING

BODY PAINT PROCESS

All bright metal fittings, if unavailable in stainless steel shall be heavily chrome plated. Iron fittings shall be copper plated prior to chrome plating. If applicable, any and all accessory times shall be removed from the body prior to cleaning and painting. Any accessory items that are to be painted, shall be painted separately and installed after the body is painted and cured.

All seams shall be caulked, both inside and along the exterior edges, with a urethane automotive sealant to prevent moisture from entering between any body panels.

The body and all parts shall be thoroughly washed with a grease cutting solvent (PPG DX330) prior to any sanding. After the body has been sanded and the weld marks and minor imperfections are filled and sanded, the body shall be washed again with (PPG DX330) to remove any contaminants on the surface.

The next two to four coats (depending on need) shall be a PPG DelFleet F4936 High Solids Epoxy Gray Primer. The film build shall be 4-6 mils when dry. The primer surfacer coat, after appropriate dry time, shall be sanded with 320-600 grit sandpaper to ensure maximum gloss of the paint. The last step is the application of at least three coats of PPG DelFleet polyurethane two-component color (single stage). The film build being 2-3 mils dry. The single stage polyurethane, when mixed with component (PPG F3270) catalyst shall provide a UV barrier to prevent fading and chalking.

All products and technicians are certified by PPG every two (2) years.



APPARATUS COLOR

INTERIOR COMPARTMENT FINISH

Six (6) apparatus side compartment interiors are to be painted with a spatter finish material. The compartments shall be cleaned with a grease remover, and then the surface sanded and prepared for painting. The compartment shall be provided with two (2) coats of white epoxy. The compartments are then coated with a splatter paint top coat.

WHEEL PAINTING

The exterior faces of the front wheels and outer rear wheels only, shall be finish painted to match the apparatus body. Wheels shall be properly prepared and finished with primer coats and top coats as specified.

TOUCH-UP PAINT

One (1) two (2) ounce bottle of touch-up paint shall be furnished with the completed truck at final delivery.

SIMULATED GOLD LEAF LETTERING

The lettering shall be applied in simulated gold leaf material, shaded in black and encapsulated in clear Mylar.

A quantity of fifty (50), four (4) inch letters are to be placed on the cab and on the body as directed by fire department.

REFLECTIVE STRIPING

A 1" x 6" x 1" wide 3M brand Scotchlite reflective multi-stripe shall be affixed to the perimeter of the vehicle. There shall be a 1" gap between each of the stripes. Striping shall conform to applicable NFPA requirements. At least 50% of the perimeter length of each side and width of the rear, and at least 25% of the perimeter width of the front of the vehicle shall have reflective striping.

The striping shall be applied in a large "Z" pattern.

COLOR OF STRIPING MATERIAL

The color of the 3M brand striping material shall be white.



CHEVRON STRIPING

The entire rear portion of the body shall have Oralite V98 reflective red and yellow striping installed. The chevron style striping shall be applied at a 45-degree upward angle pointing towards the center upper portion of the rear panel.

YELLOW SAFETY TAPE - STANDING & WALKING SURFACES

The apparatus shall be NFPA standard 15.7.1.6 designating any horizontal standing or walking surface higher than 48-in (1220 mm) from the ground and not guarded by railing or structure at least 12-in (300 mm) high shall have at least a 1-in (25 mm) wide safety yellow line delineation that contrasts with the background to mark the outside perimeter of the designated standing or walking surface area, excluding steps and ladders.

LOOSE EQUIPMENT

ROOF LADDER

One (1) Duo Safety Model 775-A, 14 foot aluminum roof ladder with folding steel roof hooks on one end and steel spikes on the other end shall be provided on the apparatus. The ladder shall meet or exceed all latest NFPA Standards.

EXTENSION LADDER

One (1) Duo-Safety Model 900-A, 24 foot two (2) section aluminum extension ladder shall be provided on the apparatus. The ladder shall meet or exceed all the latest NFPA standards.

FOLDING LADDER

One (1) Duo Safety Model 585-A, 10 foot folding aluminum ladder shall be provided on the apparatus. The ladder shall meet or exceed all the latest NFPA Standards.

PIKE POLE

One (1) 8' pike pole with round handle shall be provided. The pike pole shall be of fiberglass construction.

PIKE POLE

One (1) 10' pike pole with round handle shall be provided. The pike pole shall be of fiberglass construction.



SUCTION HOSE

Two (2) 6.0" x 10 foot length of PVC flexible suction hose shall be supplied. The suction hose shall have light weight couplings provided.

HOSE COUPLINGS

Light weight aluminum couplings shall be provided on the suction hose. A long handle female swivel shall be provided on one end and a rocker lug male shall be provided for the other end.

WARRANTIES

BODY WARRANTY

We warrant each new motorized fire apparatus manufactured by ROSENBAUER AMERICA, LLC for a period of ONE YEAR from the date of delivery, except for chassis and other components noted herein.

Under this warranty we agree to furnish any parts to replace those that have failed due to defective material or workmanship where there is no indication of abuse, neglect, unusual or other than normal service providing that such parts are, at the option of ROSENBAUER AMERICA, LLC, made available for our inspection at our request, returned to our factory or other location designated by us with transportation prepaid within thirty days after the date of failure or within one year from the date of delivery of the apparatus to the original purchaser, whichever occurs first, and inspection indicates the failure was attributed to defective material or workmanship.

The warranty on the chassis and chassis supplied components, storage batteries, generators, electrical lamps and other devices subject to deterioration is limited to the warranty of the manufacturer thereof and adjustments for the same are to be made directly with the manufacturer by the customer.

This warranty will not apply to any fire apparatus that has been repaired or altered outside our factory in any way, which in our opinion might affect its stability or reliability.

This warranty shall not apply to those items that are usually considered normal maintenance and upkeep services: including, but not limited to, normal lubrication or proper adjustment of minor auxiliary pumps or reels.

This warranty is in lieu of all other warranties, expressed or implied, and all other obligations or liabilities on our part. We neither assume nor authorize any person to assume for us any liability in connection with the sales of our apparatus unless made in writing by ROSENBAUER AMERICA, LLC.



ALUMINUM BODY WARRANTY - FIVE YEAR

Rosenbauer America, LLC warrants to the original purchaser only, that the all aluminum body, fabricated by Rosenbauer America, LLC, under normal use and with reasonable maintenance, be structurally sound and will remain free from corrosion perforation for a period of FIVE (5) years.

This warranty does not apply to the following items that are covered by a separate warranty: paint finish, hardware, moldings, and other accessories attached to this body. In addition, this warranty does not apply to any part or accessory manufactured by others and attached to this body.

ROSENBAUER AMERICA, LLC MAKES NO OTHER WARRANTY, EXPRESS OR IMPLIED, WITH RESPECT TO THE ALUMINUM BODY AND ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE AND HEREBY DISCLAIMED.

Rosenbauer America, LLC will replace without charge, repair or make a fair allowance for any defect in material or workmanship demonstrated to its satisfaction to have existed at the time of delivery or not due to misuse, negligence, or accident. If Rosenbauer America, LLC elects to repair this body, the extent of such repair shall be determined solely by Rosenbauer America, LLC, and shall be performed solely at the Rosenbauer America, LLC factory, or at an approved facility. The expense of any transportation to or from such repair facility shall be borne by the purchaser and is not an item covered under this warranty.

Rosenbauer America, LLC will not be liable for damages and under no circumstances will its liability exceed the price for a defective body. The remedies set forth herein are exclusive and in substitution for all other remedies to which the purchaser would otherwise be entitled.

Rosenbauer America, LLC will be given a reasonable opportunity to investigate all claims. The purchaser must commence any action arising out of, based upon or relating to agreement or the breach hereof, within twelve months from the date the cause of the action occurred.

Note: Surety bond, if required, will cover standard one year warranty period only and will not cover any extended warranties allowed by seller or other component manufacturers.



GALVANIZED SUBFRAME WARRANTY

Subject to the provisions, limitations and conditions set forth in this warranty, Rosenbauer America, LLC (hereby referred to as "seller"), hereby warrants to each original purchaser only that each new hot dip galvanized body subframe (exclusive of paint finish and hardware) is structurally sound and free of all structural defects of both material and workmanship and further warrants that it will maintain such structural integrity for the duration of ownership by the original purchaser. This warranty terminates upon transfer of possession or ownership by original purchaser.

This warranty is conditioned upon normal use and reasonable maintenance of such subframe; prompt written notice of all defects to seller or one of the seller's then authorized dealers in the area; no repair or additions there to except by seller or authorized by it; said defect not resulting from misuse, negligence, accident, remount, overloading beyond applicable weight rating by customer or third parties. If any such conditions are not complied with, this warranty shall become void and unenforceable.

Should repairs become necessary under the terms of the warranty, the extent of that repair shall be determined solely by the seller and shall be performed solely at Rosenbauer America, LLC or a repair facility designated by the seller. The expense of any transportation to or from such repair facility shall be that of the purchaser and is not an item covered by this warranty.

Seller reserves the unrestricted right at any time from time to time to make changes in the design of and/or improvements on its products without thereby imposing any obligation on itself to make corresponding changes or improvements in or on its products theretofore manufactured.

EXCLUSIONS AND LIMITATIONS: THIS MANUFACTURER'S WARRANTY IS PROVIDED IN PLACE OF ANY AND ALL OTHER REPRESENTATIONS OR IMPLIED WARRANTIES. NO PERSON IS AUTHORIZED TO MAKE ANY REPRESENTATIONS OR WARRANTY ON BEHALF OF ROSENBAUER AMERICA, LLC OR ANY OF ITS DISTRIBUTORS OTHER THAN SET FORTH IN THIS MANUFACTURER'S WARRANTY. YOUR RIGHT TO SERVICE AND REPLACEMENT OF PARTS ON THE TERMS EXPRESSLY SET FORTH HERIN ARE YOUR EXCLUSIVE REMEDIES AND NEITHER THE MANUFACTURER NOR ANY OF ITS DISTRIBUTORS SHALL BE LIABLE FOR DAMAGES, WHETHER ORDINARY, INCIDENTAL OR CONSEQUENTIAL.

Note: Surety bond, if required, will cover standard one year warranty period only and will not cover any extended warranties allowed by seller or other component manufacturers.



PAINT WARRANTY FIVE YEAR

The PPG paint performance guarantee will cover the areas of the vehicle finished with the specified product for a period of FIVE (5) years beginning the day the vehicle is delivered to the purchaser.

The full apparatus body, manufactured and painted by Rosenbauer America, LLC, shall be covered for the following paint failures as outlined on the guarantee certificate:

- Peeling or delaminating of the topcoat and/or other layers of paint.
- Cracking or checking.
- Loss of gloss caused by cracking, checking, or hazing.
- Any paint failure caused by defective PPG Fleet Finishes, which are covered by this guarantee.

All guarantee exclusions, limitations, and methods of claims are covered in the full certificate provided to the original purchaser.

Note: Surety bond, if required, will cover standard one year warranty period only and will not cover any extended warranties allowed by seller or other component manufacturers.

PUMP WARRANTY

Rosenbauer America, LLC (Rosenbauer) warrants, to the original buyer only, that products and parts manufactured by Rosenbauer America, LLC will be free from defects in material and workmanship under normal use and service for a period of five (5) years from the date the product is first placed in service, provided the buyer notifies Rosenbauer in writing, of the defect in said product within the warranty period, and said product is found by Rosenbauer America to be conforming with the aforesaid warranty.

When required in writing by Rosenbauer, defective products must be promptly returned by the buyer to the Rosenbauer plant or at such other place as may be specified by Rosenbauer with transportation and other charges prepaid. A Return Goods Authorization (RGA) is required for all products and parts and may be requested by phone, fax or mail. The aforesaid warranty excludes any responsibility or liability of Rosenbauer America, LLC for:

A. Damages or defects due to accident, abuse, misuse, abnormal operating conditions, negligence, accidental causes or improper maintenance, or attributable to written specifications or instructions furnished by buyer;

B. Defects in products manufactured by others and furnished by Rosenbauer America hereunder, it being understood and agreed by the parties that the only warranty provided for such products shall be the warranty provided by the manufacturer thereof which, if assignable, Rosenbauer America will assign to the buyer, if requested by Buyer;



- C. Any product or part, altered, modified, serviced or repaired other than by Rosenbauer America, without its prior written consent.
- D. The cost of dismantling, removing, transporting, storing, or insuring the defective product or part and the cost of reinstallation.
- E. Normal wear items (packing, strainers, filters, light bulbs, anodes, intake screens, etc.)

All other warranties are excluded, whether expressed or implied by operation of law or otherwise, including all implied warranties of merchantability or fitness for purpose. Rosenbauer America shall not be liable for consequential or incidental damages directly or indirectly arising or resulting from breach of any of the terms of this limited warranty or from the sale, handling, or use of any other product or part. Rosenbauer America liability hereunder, either for breach of warranty or for negligence, is expressly limited at Rosenbauer America option:

- A. To the replacement at the agreed point of delivery of any product or part, which upon inspection by Rosenbauer America or its duly authorized representative, is found not to conform to the limited warranty set forth above, or
- B. To the repair of such product or part, or
- C. To the refund or crediting to buyer of the net sales price of the defective product or part.

Buyer's remedies contained herein are exclusive of any other remedy otherwise available to the buyer.

STAINLESS STEEL PLUMBING WARRANTY

The manufacturer shall provide a ten (10) year warranty on the stainless steel plumbing components and installation. The manufacturer shall supply details of their warranty information with their bid submission.



WATER TANK WARRANTY

UNITED PLASTIC FABRICATION INC. Warrants each UPF POLY-TANK IIE Booster/Foam tank to be free from manufacturing defects in material and workmanship for the service life of the vehicle (vehicle must be actively used in fire suppression). The UPF POLY-TANK IIE must be installed in accordance with the United Plastic Fabricating installation manual. Every UPF POLY-TANK IIE is thoroughly inspected and tested for leaks before leaving our facility. Should any problems develop with your UPF POLY-TANK IIE booster/foam tank and will not meet performance criteria during the service life of the vehicle, notify UPF in writing or call our TOLL FREE SERVICE HOT LINE 1-800-USA-POLY. Provide UPF with the serial number and a description of the problem. If the tank problem would render the truck out of service, UPF will dispatch a service technician **WITHIN 48 HOURS (2 DAYS)** to repair the tank. (This time period is for North America only). If the vehicle can remain in service, UPF will dispatch a service technician within a mutually agreed upon time period.

We will repair, or at our option, replace the tank with a new UPF POLY-Tank IIE. UPF will cover customary and reasonable costs to remove and install the UPF POLY-TANK IIE. This warranty will not cover tanks that have been improperly installed, misused or abused, and the serial number must not have, been altered, defaced or removed. UPF will not cover any unauthorized third party repairs or alterations. Any of these actions may void the warranty.

THERE ARE NO WARRANTIES, EXPRESSED OR IMPLIED, WHICH EXTEND BEYOND THE DESCRIPTION OF THE FACE HEREOF. THERE IS NO EXPRESS OR IMPLIED WARRANTY OF MERCHANTABILITY OR A WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. ADDITIONALLY, THIS WARRANTY IS IN LIEU OF ALL OTHER OBLIGATIONS OR LIABILITIES ON THE PART OF UNITED PLASTIC FABRICATION, INC.

This warranty contains the entire warranty. It is the sole warranty and price agreements or representation, whether oral or written, are either merged herein or expressly cancelled. UNITED PLASTIC FABRICATION, INC. Neither assumes, nor authorizes any person supposing to act on its behalf, to change, nor assume for it, any warranty or liability concerning its product.

IN NO EVENT WILL UNITED PLASTIC FABRICATION, INC BE LIABLE FOR AN AMOUNT IN EXCESS OF THE PRESENT RETAIL, PURCHASE PRICE PLUS INSTALLATION AND REMOVAL COST OF THE BOOSTER TANK, FOR ANY LOSS OR DAMAGE, WHETHER DIRECT OR INDIRECT, INCIDENTAL, CONSEQUENTIAL, OR OTHERWISE ARISING OUT OF FAILURE OF ITS PRODUCT.



This warranty gives you specific legal rights, and you may have other rights, which vary from state to state. Some states do not allow exclusion or limitation of incidental or consequential damage, so the above limitation or exclusion may not apply to you. Some states do not allow limitation on how long an implied warranty lasts, so the above limitation may not apply to you.

PAINT WARRANTY TEN YEAR

The PPG paint performance guarantee will cover the areas of the vehicle finished with the specified product for a period of TEN (10) years beginning the day the vehicle is delivered to the purchaser.

The full apparatus chassis, manufactured and painted by Rosenbauer Motors, LLC, shall be covered for the following paint failures as outlined on the guarantee certificate:

- Peeling or delaminating of the topcoat and/or other layers of paint.
- Cracking or checking.
- Loss of gloss caused by cracking, checking, or hazing.
- Any paint failure caused by defective PPG Fleet Finishes, which are covered by this guarantee.

All guarantee exclusions, limitations, and methods of claims are covered in the full certificate provided to the original purchaser.

Note: Surety bond, if required, will cover standard one year warranty period only and will not cover any extended warranties allowed by seller or other component manufacturers.

CAB STRUCTURE WARRANTY

The cab structure shall be warranted for a period of ten (10) years with the complete detail of the warranty outlined in a document provided upon request.

TRANSMISSION WARRANTY

The Allison EVS transmission shall be warranted for a period of five (5) years with the complete detail of the warranty outlined in a document provided upon request.

ENGINE WARRANTY

The Cummins engine shall be warranted for a period of five (5) years or 100,000 miles, whichever comes first, with the complete detail of the warranty outlined in a document provided upon request.



FRAME WARRANTY

The frame and cross members shall carry a lifetime warranty with the complete detail of the warranty outlined in a document provided upon request.

FRONT AND REAR AXLE WARRANTY

The front axle shall be warranted by Hendrickson for five (5) years or 500,000 miles, which ever comes first, under the general service application.

REAR AXLE WARRANTY

The rear axle(s) shall be warranted by Meritor for two (2) years with unlimited miles under the general service application.

CAB AND CHASSIS WARRANTY

The cab and chassis shall carry a twenty-four (24) month warranty providing limited parts and labor from the date the complete apparatus is delivered to the end user. The complete detail of the warranty shall be outlined in a document provided upon request.

FRAME GALVANIZING WARRANTY

Rosenbauer Motors, LLC hereby warrants the galvanized frame rails shall be warranted for a period of twenty 20 years and includes the following coverage:

- The galvanized surfaces of the frame rails and cross members shall be free from corrosion caused by dissimilar metals, adhesion, blistering or peeling.
- The galvanized surfaces of the frame rails and cross members shall be free from any corrosion perforation.

Under this warranty Rosenbauer Motors, LLC agrees to repair or refinish any galvanized surface that has been found to have a defect caused by defective manufacturing methods or galvanized material where there is no indication of abuse, neglect, unusual or other than normal service providing that such item or items are, at the option of Rosenbauer Motors, LLC, made available for our inspection at our request, returned to our factory or other location designated by us with transportation prepaid within thirty days after the date of failure or within twenty years from the date of delivery of the apparatus to the original purchaser, whichever occurs first, and inspection indicates the failure was attributed to a defect caused by defective manufacturing methods or galvanized material selection. Written authorization for repair or item replacement must be sought from Rosenbauer Motors, LLC customer service prior to the repair or item replacement occurring.



Coverage Period

0 – 10 years = 100%

11 – 15 years = 50%

16 – 20 years = 25%

This warranty shall not apply to or cover:

- Normal maintenance services including clean and repair of surface corrosion caused by normal road salt/chemicals or debris contacting the frame rails and cross members.
- Damage to the galvanized frame rails caused by exposure to severe environmental or chemical conditions or acidic environment.
- Any item that has been repaired, replaced or altered by a facility not approved in advance by Rosenbauer Motors, LLC, or in a manner which, at Rosenbauer Motors, LLC discretion, may adversely affect the safe operation or durability of the vehicle or item.
- Special, incidental or consequential damages including, but not limited to, loss of time, inconvenience, loss of use, lost profits or transportation fees or charges to or from any facility.
- Any malfunction resulting from misuse, negligence, alteration, accident or lack of operational knowledge, lack of normal or required maintenance or adjustments, fire or acts of God.

This warranty is in lieu of all other warranties expressed or implied, and all other obligations or liabilities on our part. This warranty does not supersede the structural warranty. We neither assume nor authorize any person to assume for us any liability or make any alteration to this warranty in connection with the sale of our apparatus unless expressly given in writing by Rosenbauer Motors, LLC, 5190 260th St. Wyoming, MN 55092.

NOTE: Surety bond, if required, will cover standard one year warranty period only and will not cover any extended warranties allowed by seller or other component manufacturers.

Engine Placement



MISCELLANEOUS

COMPLETE PRINTED MANUAL

ROSENBAUER shall provide with the vehicle upon delivery, one (1) complete delivery manual. This manual shall be in a notebook type binder, with reference tabs for each section of the vehicle. A companion compact disk (CD) with all of the printed material in an electronic format (Adobe Acrobat PDF) shall be provided.

Within each section shall be:

- Individual component manufacturer instruction and parts manuals
- Warranty forms for the body
- Warranty forms for all major components
- Warranty instructions and format to be used in compliance with warranty obligations
- Wiring diagrams
- Installation instruction and drawings for major parts
- Visual graphics and electronic photos for the installation of major parts
- Necessary normal routine service forms, publications and components of the body portion of the apparatus
- Technical publications for training and instruction on major body components
- Warning and safety related notices for personnel protection
- Cab and chassis manuals on parts, service and maintenance shall be provided

"ON-LINE" SERVICE MANUAL SUPPORT

As part of the standard delivery manual, **ROSENBAUER** shall give a password-protected link to the end user, allowing access to the manufacturers' database on service parts. The internet-based system shall allow the end user to access the major component supplier's service parts listing such as Hale, Waterous, Akron, etc. This shall be accomplished with simplistic point and click features on the manufacturer line item within the "stripper" or "line item sheet". This will include, automatic updates, printable schematics and manufacturer's web links and is available in the commercially available format of Adobe Acrobat Reader to access these documents.

Rosenbauer America, LLC shall submit with the bid proposal, a sample set of on line Adobe formatted material that has been printed from the manufacturer's website.



Parts Listings within Manuals

The manuals will include cross-reference part numbers from the **ROSENBAUER** part number to the vendor parts. Example: **ROSENBAUER** Hydraulic Ladder Rack, Part #LR-MN-0002 cross-referenced to Ziamatic Corporation Part 098-MN2345. This will allow for reference between individual parts and complete installation assemblies as completed by the body builder. The manuals will list all components of the vehicle that includes a vendor part utilized in a complete installation via the manufacturer's "line item sheet" or "stripper" utilized to manufacture the completed vehicle. These are "As Built" and proposals with "typical" or "generic" manuals will be rejected.

Illustrative Schematics within Manuals

ROSENBAUER shall include installation diagrams and drawings of all major sub assemblies. This will include components such as hydraulic ladder rack assemblies, pump panels, tanks, fire pumps, etc. The drawings shall be linked via an Internet based service program, in an electronic format from the manufacturers "stripper" (line item listing) of the manufacturing document. **ROSENBAUER** shall submit, upon request, a sample schematic.

Digital Images within Manuals

In addition to two and three-dimensional installation drawings, **ROSENBAUER** shall make accessible, via an internet based link, the actual photos of the installed components listed within the "stripper" or line sheet. This will include, but not limited to wiring terminals, main body distribution strips, fire pump shifting, auxiliary components, etc. **ROSENBAUER** shall submit a sample of these upon request.

Installation Instructions within Manuals

ROSENBAUER "work instructions" or "installation instructions" shall be included with the service manuals. These documents shall be accessible via a web-based link to the individual vehicle manufactured. The work instructions shall give systematic instructions of the component installation process. **ROSENBAUER** shall submit, upon request, a sample set of instructions.

Automatic Updates of Manuals and Parts Listings

The online manuals will include automatic updates that are accessible via the web link. When clicking on the part within the manufacturer's stripper or line sheet, it will allow the end user to access the component manufacturer website for updated information. This will allow for latest parts and service components from the individual part manufacturer or vendor.



Electrical Schematics

To maintain the vehicles electrical systems, the manufacturer shall provide to the purchaser the instructional manuals, complete electrical information and schematics on the vehicle. The electrical information shall be provided as follows:

Wiring Systems 12 and 120 Volt:

- Graphic symbols for electrical diagrams.
- Wire labeling, imprinting codes and index.
- Computer generated electrical schematics indicating the circuit number, wire size, switches, circuit breaker and terminals on the vehicle.

ROSENBAUER shall submit, upon request, a sample set of diagrams.

NFPA PUMPER EQUIPMENT ALLOWANCE

In compliance with NFPA #1901 standards, the apparatus shall be engineered to provide an allow of 2500 pounds of fire department provided loose equipment.

FINANCIAL STABILITY SPECIFICATIONS

With high-profile instances of fire apparatus manufacturers encountering financial difficulties, it is imperative that fire departments be diligent in evaluating the financial position of the companies they solicit to build on their emergency response vehicles. A contract entered into with a company on shaky ground is a dangerous prospect, since conducting business with a manufacturer in such condition could open the department to monumental problems.

Take, for instance, the growing theme of manufacturers *requiring* as opposed to *offering* pre-payment and progressive payment options with a corresponding discount off the price of a vehicle. Such offers are made with an ulterior motive in mind, as it can be generally inferred that manufacturers requiring pre-payments and progressive payments do so because they need your cash *today* to fund production of other vehicles already in the backlog.

Should problems arise, as has been the case in situations too numerous to mention, your department risks losing any down payments already made or even the entire cost of a piece of equipment should certain pre-pay discount situations go awry.



While pre-payment discounts may be enticing, it is important to know just how stable the manufacturer seeking your funds is before you make that commitment. If you enter into one of these agreements and the manufacturer hits a rough patch, it is you that will be hurting, because your funds may not be recoverable. However, if you enter into a contract with a financially sound manufacturer, you will reap all of the benefits of a well-built truck at a lower cost. You may equally, by taking advantage of the time-value of money, be able to afford more truck than initially thought, because funds saved by leveraging pre-payment options could allow you get some added features that you might not necessarily have been able to afford.

With this in mind, it must be noted that Rosenbauer is a company with rock-solid financial stability. This is a statement not made lightly, as we can prove it to you. We can provide language that you can insert into your bid specifications that stipulates that in order for bids to be accepted by a fire department, the company bidding must meet several fiscal criteria.

The first criteria call for the successful bidder to meet a debt-to-equity ratio not exceeding a 2.0 rating. Rosenbauer presently stands at a 1.51 rating, which is well-below the accepted rating. This low number results from Rosenbauer owning more assets with a marginal debt service. This means we are not using lenders to fund our operations, nor our growth.

The second requirement is that the debt coverage ratio of the successful body builder exceeds a 100 rating. The higher the number, the better able a company is to meet its payment obligations with banks and creditors. Rosenbauer's number is at 279.6, which is nearly three times the required amount. The higher the debt coverage ratio, the easily and more fluidly a company is positioned to pay its monthly obligations and operating costs.

The third criteria require that the equity ratio of the successful bidder must exceed .30 rating. A higher equity ratio indicates that the body builder has increased flexibility to meet its financial obligations which translates into greater financial stability. Rosenbauer currently has an equity ratio of .387 which is well above the accepted rating and an excellent indicator of financial strength.

When exploring and evaluating various manufacturers to consider for building your apparatus, there is little doubt you will find one that stands on as firmly a financial ground as Rosenbauer. While others are experiencing stressful issues that raise doubts as to the company's long-term viability, Rosenbauer continues to demonstrate a strengthening of its financial position in the apparatus manufacturing industry. Because Rosenbauer meets and exceeds all the above-stated financial bid requirements, we are best positioned to ensure customers of a strong relationship with the company, which cannot be claimed by most of our competitors in this volatile market.

The Rosenbauer America Dun and Bradstreet number is 02-447-3584. To acquire a Dun and Bradstreet report, telephone them at 1-800-234-3867 (in Canada 800-463-6362) or visit their web site address at www.dnb.com. Dun and Bradstreet is nationally-recognized, independent financial analysis company.



CENTER OF GRAVITY

The apparatus, prior to acceptance, will be required to meet the vehicle stability of the applicable NFPA Automotive Fire Apparatus Standard.

A calculated center of gravity shall be provided. The calculated or measured center of gravity (CG) shall be no higher than 80-percent of the rear axle track width.

ENGINEERING BLUEPRINTS

ROSENBAUER has submitted "proposal" blueprints which are "representative" of the vehicle being proposed and these have been generated on computer-aided-design (CAD) equipment. The blueprints submitted shall be on "B" size paper, 11" x 17" in size and views are on 1/16" to 1" scale.

The blueprints are provided as follows:

<u>Sheet No. 1:</u>	Left side exterior view
	Right side exterior view
	Rear exterior view

ROSENBAUER shall be provide construction drawings for approval prior to actual construction of the vehicle.

The design of the equipment is in accordance with the best engineering practices. The equipment design and accessory installation shall permit accessibility for use, maintenance and service. All components and assemblies shall be free of hazardous protrusions, sharp edges, cracks or other elements, which might cause injury to personnel or equipment.

All oil, hydraulic, and air tubing lines and electrical wiring shall be located in protective positions properly attached to the frame or body structure and shall have protective loom or grommets at each point where they pass through structural members, except where a through-frame connector is necessary.

Parts and components will be located or positioned for rapid and simple inspection and recognition of excessive wear or potential failure. Whenever functional layout of operating components determines that physical or visual interference between items cannot be avoided, the item predicted to require the most maintenance shall be located for best accessibility.



CHANGE ORDERS

To ensure the proper engineering and construction of the purchaser's custom fire apparatus in a timely manner, the contractor shall consider the order final and complete after any changes made during the pre-construction conference are mutually approved. Change orders requested after the pre-construction conference are discouraged. It shall be understood and agreed that any changes, if approved, after the order has been released to Engineering, shall constitute a valid cause for production delay and without penalty to the contractor.

STATIC LOAD SEAT TEST INFORMATION

This model of seat shall have successfully completed the static load tests set forth by FMVSS 207/210. This testing shall include a simultaneous forward load of 3000 pounds each on the lap and shoulder belts and twenty (20) times the weight through the center of gravity. This model of seat installed in the cab model, as specified, shall have successfully completed the dynamic sled testing using FMVSS 208 as a guide with the following accommodations. In order to reflect the larger size outfitted firefighters, the test dummy used shall be a 95th percentile hybrid III male weighing 225 pounds rather than the 50th percentile male dummy weighing 165 pounds as referenced in FMVSS 208.

The materials used in construction of the seat shall also have successfully completed testing with regard to the flammability of materials used in the occupant compartments of motor vehicles as outlined in FMVSS 302, of which dictates the allowable burning rate of materials in the occupant compartments of motor vehicles.

CAB TEST INFORMATION

The cab as built shall have successfully completed the pre-load side impact, static roof load application and frontal impact without encroachment to the occupant survival space when tested in accordance with Section 4 of SAE J2420 COE Frontal Strength Evaluation Dynamic Loading Heavy Trucks, Section 5 of SAE J2422 Cab Roof Strength Evaluation Quasi –Static Loading Heavy Trucks and ECE R29 Uniform Provisions Concerning the Approval of Vehicles with regard to the Protection of the Occupants of the Cab of a Commercial Vehicles Annex 3 Paragraph 5.

The above tests shall have been witnessed by and attested to by an independent third party. The test results shall have been recorded using cameras, high speed imagers, accelerometers and strain gauges.

Documentation of the testing shall be provided upon request.



CAB INTEGRITY CERTIFICATION

The manufacturer shall provide a cab crash test certification with this proposal including SAE J2422 Cab Roof Strength Evaluation - Quasi-Static Loading for Heavy Trucks and SAE J2420 COE Frontal Strength Evaluation - Dynamic Load for Heavy Trucks.

CAB TEST INFORMATION

Roof Crush

The cab shall be subjected to a roof crush test of 120,000 pounds exceeding the requirements of ECE 29 criteria. The 120,000 requirement is important to ensure to most structurally sound and safe cab in the event of a crash or roll over.

Side Impact

The cab shall be subjected to dynamic moving barrier slammed into the side of the cab at 7.5 mph, striking with an impact of 15,157 foot pounds of energy. This test will closely represent the forces a cab would incur in a rollover incident.

Frontal Impact

The cab shall withstand a frontal force produced from a moving barrier slammed into the front of the cab traveling at 10.5 mph, striking with an impact of 42,587 foot pounds of energy.

The same cab shall withstand all tests without any measurable intrusion into the survival space of the occupant area.

OPERATION AND PARTS LIST MANUALS

Each cab and chassis shall include two (2) electronic copies of the operation manuals and parts listings. The manuals shall include information specific to the components included on the apparatus.

ENGINE AND TRANSMISSION MANUALS

One (1) paper copy of the specific engine and transmission manuals shall accompany each cab and chassis.



AS BUILT WIRING DIAGRAMS

Each cab and chassis shall include one (1) digital copy of the wiring schematics and component wiring. The wiring schematics shall be developed on a software program such as VeSys Design or equal that provides continuity in files and diagram. The software shall allow you to trace through the design schematics to identify cross referenced items such as in-line connectors and wires. The software shall be interactive which allows you to view one electrical assembly drawing, click on a wire routing and the program will take you to the related circuit assembly or termination point. The software shall also provide a searchable function allowing you to view multiple diagrams using readily available pdf viewers. The digital copy of the wiring schematics shall be compatible with hand held devices such as I-Pads.

USB STORAGE

For ease of service the chassis shall come with an on board USB flash drive. The flash drive shall have a minimum of 8 GB of storage capacity; and shall be located behind the access panel on the driver side kick panel, next to the data port for the engine.

The following items shall be stored on the Flash Drive. No Exception.

- As built wiring diagrams
- Plumbing diagram
- Chassis, body and aerial manuals

The USB shall be accessible through a USB-A to USB-B cable.

ROAD SAFETY KIT

One (1) 2-1/2# ABC DOT Approved fire extinguisher shall be provided. The fire extinguisher shall be shipped loose with the chassis.

One (1) set of DOT approved hazard triangles shall be supplied with the chassis. They shall be stored in a plastic case and shipped loose with the chassis.

One (1) first aid kit
CAB



NFPA 2016 STANDARDS

This unit shall comply with the NFPA standards effective January 1, 2016.

Certification of slip resistance of all stepping, standing and walking surfaces shall be supplied with delivery of the apparatus.

A plate that is highly visible to the driver while seated shall be provided which states the overall height, length, and gross vehicle weight rating.

The manufacturer shall have programs in place for training, proficiency testing and performance for any staff involved with certifications.

An official of the company shall designate, in writing, which is qualified to witness and certify test results.